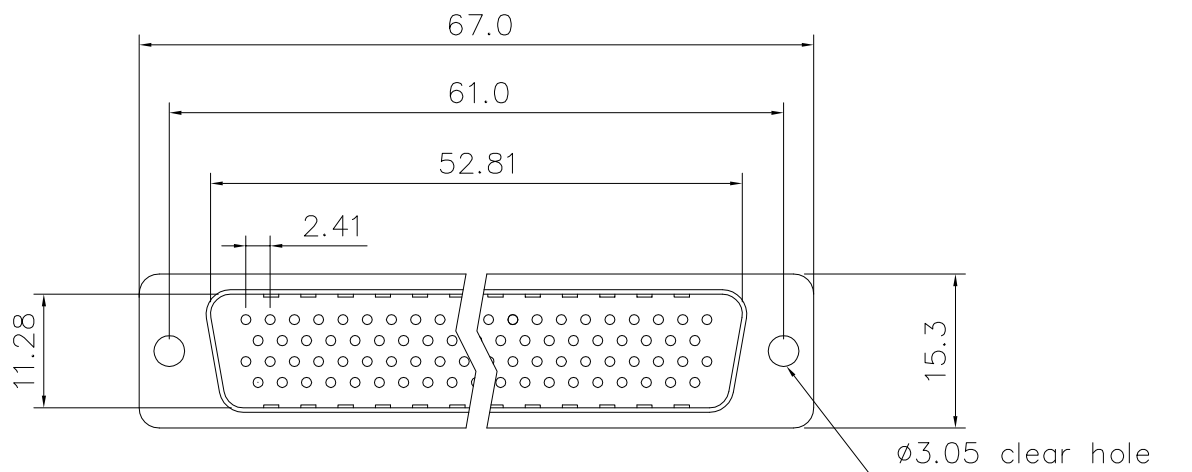


Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Contact resistance: 30 mΩ max.
Temperature range: -55℃ to +105℃
Durability: 500 cycles
ROHS compliant

Part No.:

B04-0783X1XN-02

Housing color:

1: Black

5: White

6: Blue

Terminal plating:

4: Full Au 2u"

5: Full Au 1u"

4	Rear shell	SPCC	Palting: Sn
3	Front shell	SPCC	Palting: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2019/08/19	Add the terminal plating type	Shuo Cao
△	2010/06/03	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS

□: ☒:

CRITICAL MAJOR

▽: ▽:


ZERO DEFECT S.P.C

Tolerance

.x ±0.60

.x ±0.40

.xx ±0.25



NAME:

HD.D-SUB 78pin male solder,machined pin

REV:

B

SCALE:

N:1

UNIT:

mm

DRW BY

CHK BY

DATE:

2010/06/03

Huang mei

Shuo Cao

lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770

PART NO.

B04-0783X1XN-02

APP BY

DRAWING NO.

B04-006