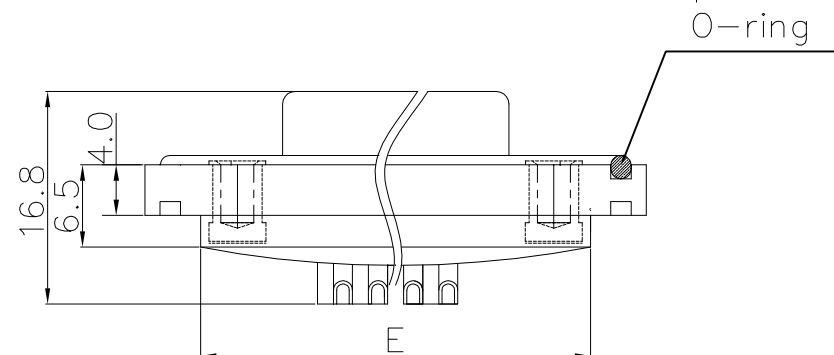

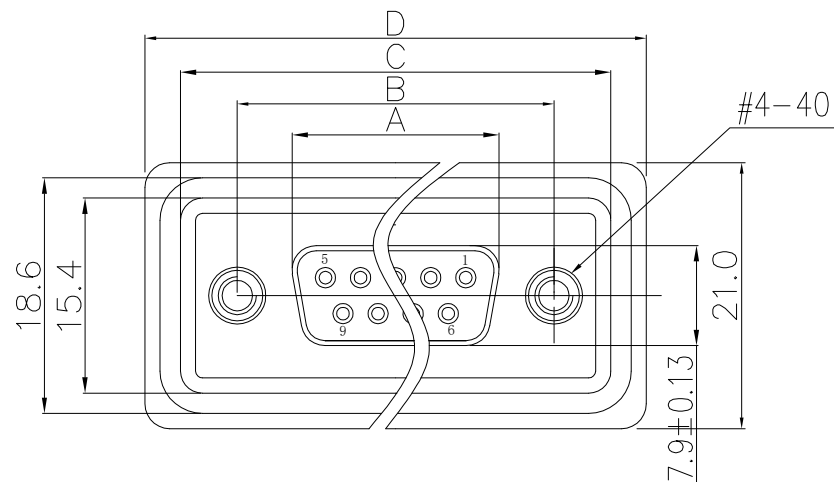


No. of Contact	A $\pm$ 0.25	B $\pm$ 0.25	C $\pm$ 0.38	D $\pm$ 0.25	E $\pm$ 0.25
9	16.33	24.99	33.98	39.58	33.98
15	24.66	33.32	42.30	47.90	42.30
25	38.38	47.04	56.02	61.62	55.92
37	54.84	63.50	72.48	78.08	72.48

Current rating: 5 AMP.
Contact resistance: 15mΩ MAX
Withstanding voltage: 1000V AC
Insulation resistance: 5GΩ Min.
Temperature range: -25℃ to +85℃
Degree of protection: IP68
ROHS compliant
Part no:

BA5-0XX411XN-02

No. of contact: 1

09: 15 pin

15: 15 pin

25: 25 pin

37: 37 pin

Terminal plating: 1

4: Full Au 2u"

5: Full Au 1u"

6	Epoxy sealant	Epoxy	
5	O-ring	Silicone	
4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Plating: see part number
Item	Desc.	Material	Remark

△	2023/03/17	Add the terminal plating type	Shuo Cao
△	2022/04/22	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
 :	 :	x.	± 0.60
CRITICAL	MAJOR	.x	± 0.40
 :	 :	.xx	± 0.25
ZERO DEFECT	S.P.C		

NAME:		Waterproof D-SUB female solder, machined pin			PART NO.		BA5-0XX411XN-02	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2022/04/22	Qiang Liao	Shuo Cao		BA5-013	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			