



2		1			
Positions	A	B	C	D	
09	30.81	24.99	16.92	19.2	
15	39.20	33.30	25.25	27.7	
25	53.05	47.04	38.96	41.1	
37	69.40	63.50	55.42	57.3	

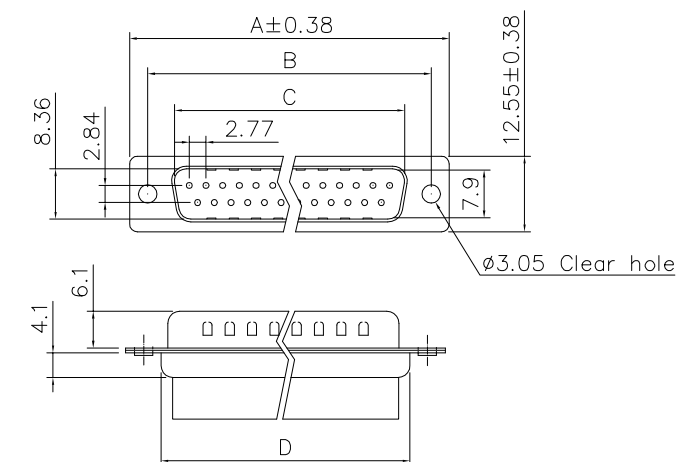

9,15,25,37 Positions

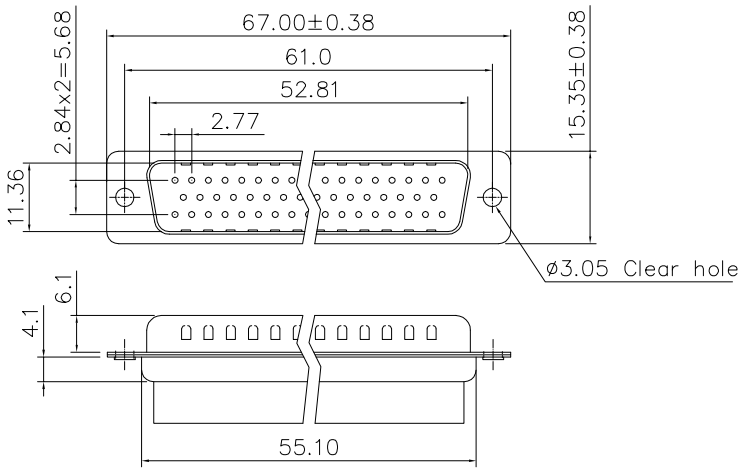


50 Positions

Current rating: 3A or 5A
Withstanding voltage: 500V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part number:
B05-0XX11100-02

Contact No.:
09: 09pin
15: 15pin
25: 25pin
37: 37pin
50: 50pin

3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Housing	PBT+30%GF	Color: black
Item	Desc.	Material	Remark

A	△	2021/09/08	Change tolerance	Shuo Cao	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:	D-SUB crimp male connector			PART NO.	B05-0XX11100-02			
	△	2021/06/19	Change part number	Shuo Cao		x.	±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B05-110	
	△	2016/07/22	First edition release	Jing Li		.x	±0.40	SCALE:	N:1	DATE:	2016/07/22	Qiang Liao	Shuo Cao			
						.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司								
	SIDE	DATE	DESCRIPTION			APPROVER			http://www.lineconn.com TEL:0769-85181660 85181770							
	8		7		6		5		4		3		2		1	