
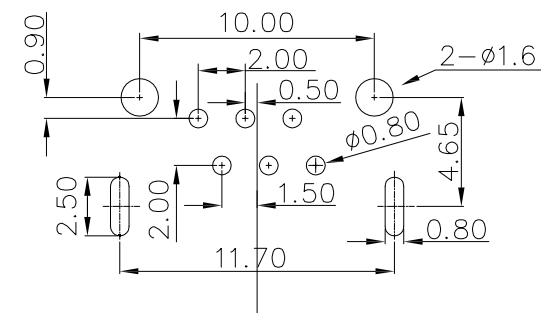
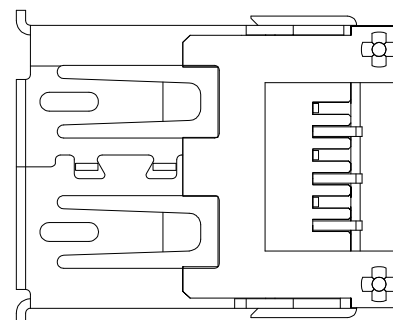
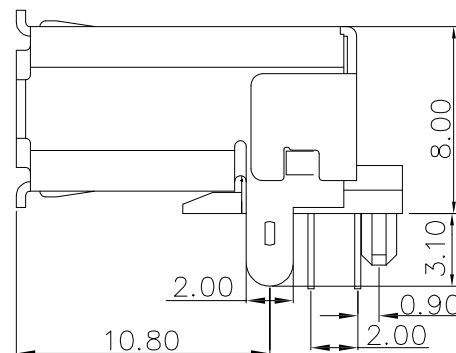
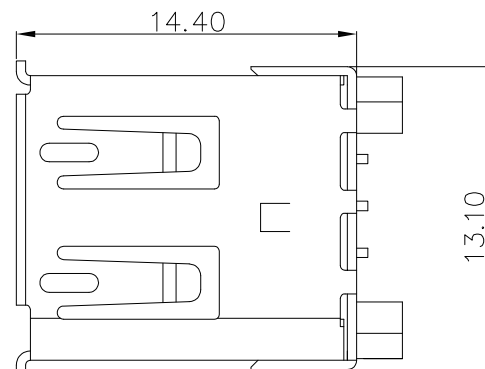


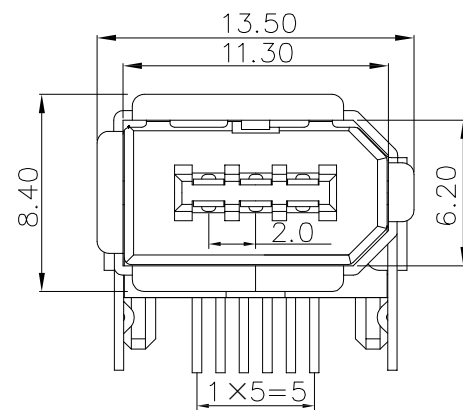

PCB LAYOUT

Voltage current rating:1 AMP.30V DC
Dielectric withstanding Voltage:300V AC
Contact resistance:50 mΩ Max.
Insulation resistance:100MΩ Min.
Temperature range:-45℃ to +125℃
ROHS compliant

3	Shell	Copper alloy	Over-plating: Ni
2	Housing	LCP UL94V-0	Color: black
1	Contact	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

				QUALITY SYMBOLS	Tolerance	NAME:	SM(1394) 6pin female right angle				PART NO.	B19-006613AN-01	
	2021/06/13	Change part number	Shuo Cao	☐ : ☒ :	x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	2008/04/26	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40	SCALE:	NONE	DATE:	2008/04/26	Huangmei	Shuo Cao		B19-005
SIDE	DATE	DESCRIPTION	APPROVER	: :	.xx ±0.25					东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL: 0769-85181660 85181770			