

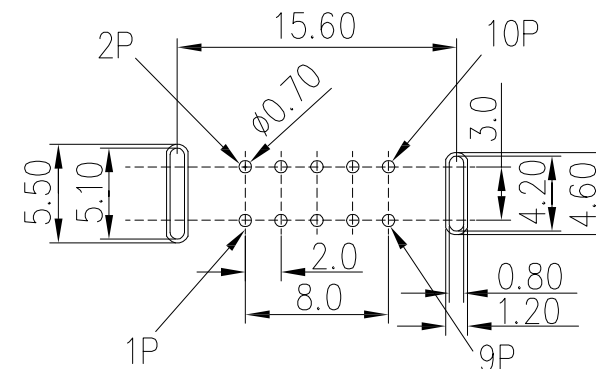
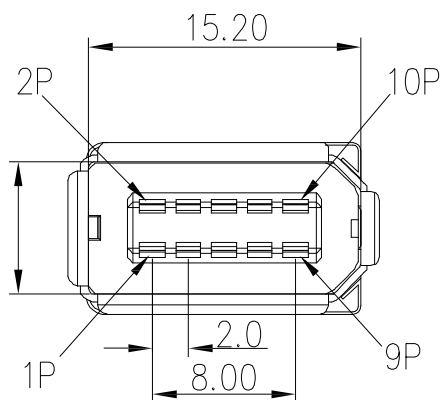
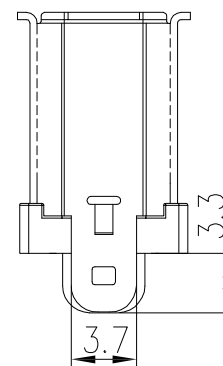


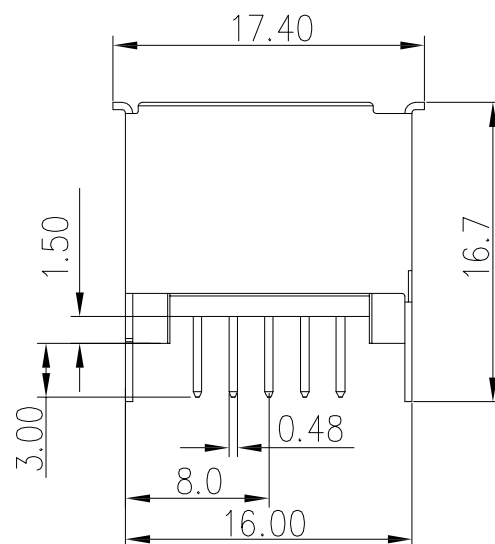

PCB Layout

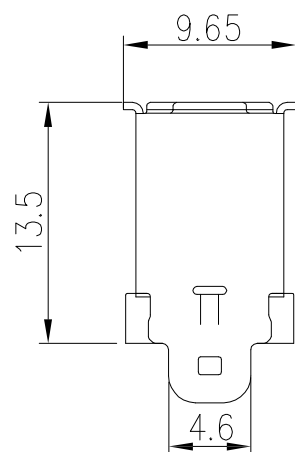

Current rating: 1.5 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

3	Shell	Copper alloy	Palting:matte tin
2	Housing	PBT+30%GF	Color:black
1	Terminal	Copper alloy	Contact area:G/F Solder area:Sn Under-plating: Ni
Item	Desc.	Material	Remaks


△	2019/12/11	Change tolerance	Shuo Cao
△	2019/11/06	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS

□: □:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:	SM(1394) 10pin female vertical DIP			PART NO.	B01-010813AN-01		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2019/11/06	Huangmei	Shuo Cao		B01-026

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770