

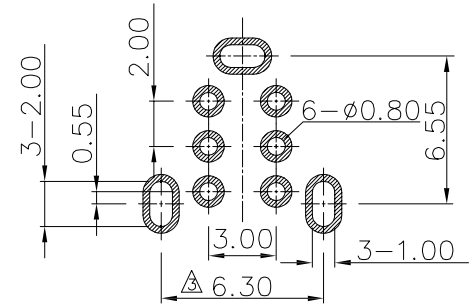
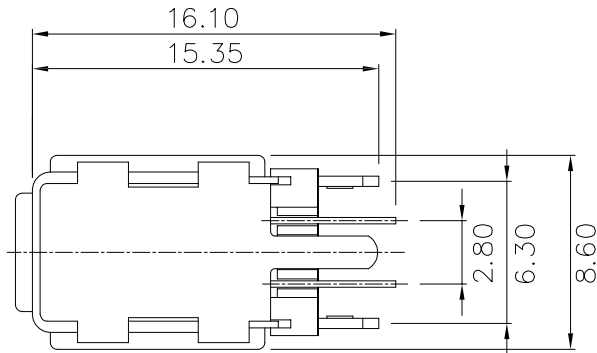
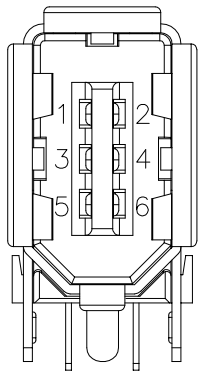
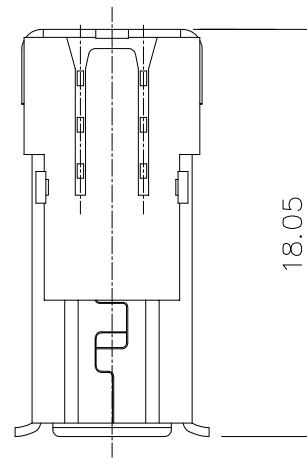


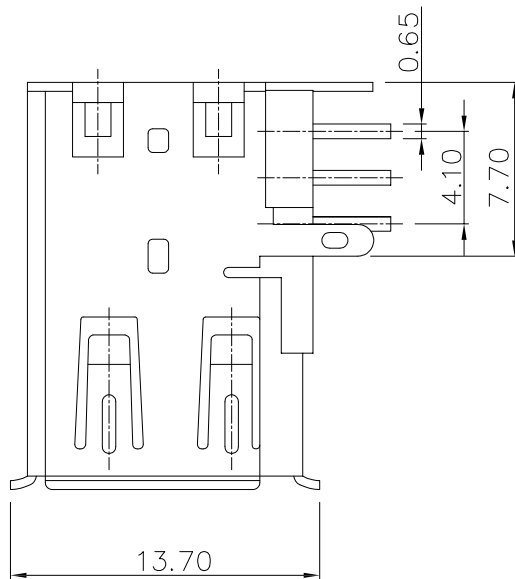

PCB layout

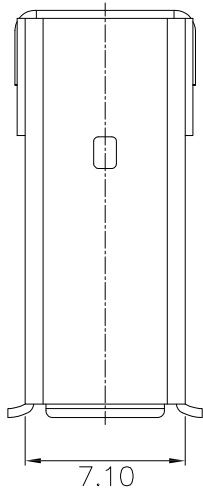

△ Current rating: 1.5 AMP. 40V AC
Voltage: 40V AC
Insulation resistance: 100MΩ Min.
Contact resistance: 30 mΩ max.
Operating temperature: -20℃ to +85℃
Durability: 1500 cycles
Unmating force: 9.8N min.
Mating forces: 39.2N max.
ROHS compliant

4	Cover	Stainless steel	
3	Shell	SPCC	Plating: Ni
2	Housing	LCP UL94V-0	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

	2024/10/18	Added insertion position icon Change electrical performance parameters	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:		SM(1394)6pin female lateral right angle				PART NO.		B19-006A13AN-01	
	2023/04/22	Correct wrong size,Change tolerance	Lei Fan		x.	±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B19-006		
	2011/07/02	First edition release	King Zhou		.x	±0.40	SCALE:	NONE	DATE:	2011/07/02	Qiang Liao	Jack Chen				
SIDE	DATE	DESCRIPTION	APPROVER		.xx	±0.25	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL: 0769-85181660 85181770									

