


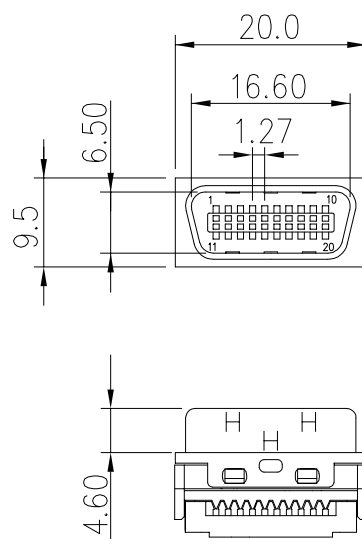


Termination Cover
(1 Places)



Wire Holder
(2 Places)



Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +125℃
ROHS compliant
Part No.:
B03-020111E0-X0
Wire holder:
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm

4	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2019/03/27	Changed Temperature range	Shuo Cao
△	2009/11/24	Changed the size	King Zhou
△	2008/08/12	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		SCSI(HPCN) 20pin male IDC connector assembly type			PART NO.	B03-020111E0-X0	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2008/08/12	Huangmei	Shuo Cao		B03-047
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com		
					TEL:0769-85181660 85181770		