

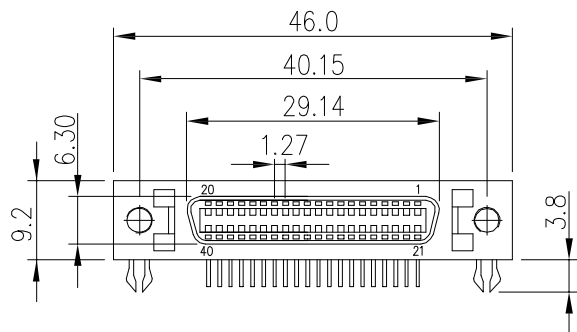
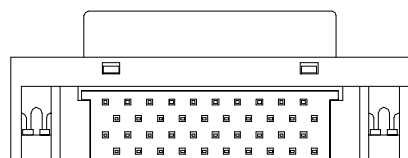
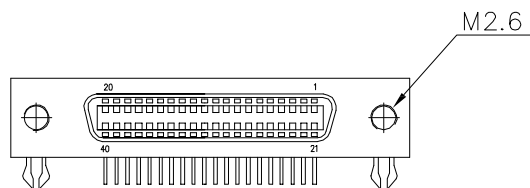



L type

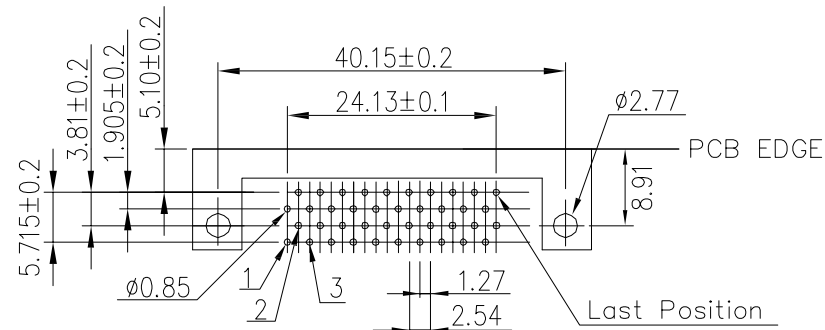

S type



PCB Layout

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:
B03-040611EB-0X
Bracket finishes:
L: latch bracket
S: screw bracket

6	Board lock	Copper alloy	Plating: Tin
5	Bracket	SPCC	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/04/07	Changed part number	Shuo Cao
△	2014/08/02	Changed the size	Jing Li
△	2010/10/11	First edition release	Jing Li

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	SCSI(HPCN) 40pin female right angle				PART NO.		B03-040611EB-0X	
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2010/10/11	Huangmei	Shuo Cao		B03-021	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			