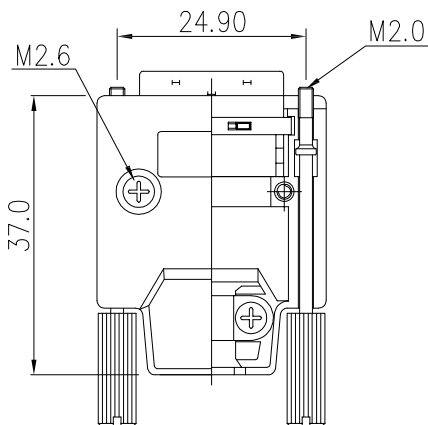







Termination cover
(2 places)

Current rating: 1 AMP.
Withstanding voltage: 250V AC
Contact resistance: 35 mΩ Max.
Insulation resistance: 500MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant

8	Flat screws	Steel	Plating: Ni
7	Cable clipper	Steel	Plating: Ni
6	Jackscrew	Steel	Plating: Ni
5	Back shell	Zinc alloy	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/07/03	Change part number	Shuo Cao
△	2016/09/29	Change tolerance	Jing Li
△	2021/06/12	First edition release	Jing Li

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25
⊕ ∠

NAME:	VHDCI 36pin male IDC assembly type, zinc alloy hood with screw	PART NO.	B06-036111EA-02
REV:	C	UNIT:	mm
SCALE:	N:1	DATE:	2016/06/12
DRW BY	Huangmei	CHK BY	Shuo Cao
APP BY		DRAWING NO.	B06-009

Lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770