
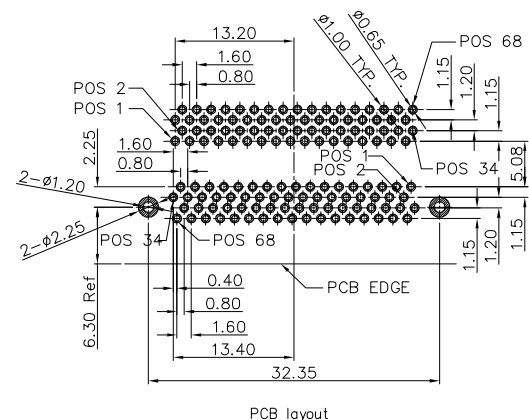

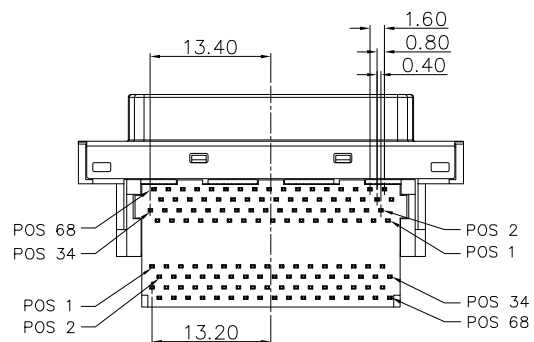
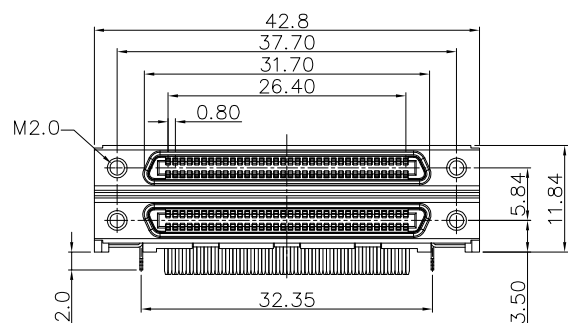


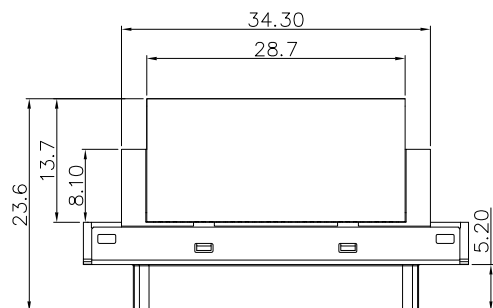

Current rating: 2A
Withstanding voltage: 250V AC
Contact resistance: 35 mΩ Max.
Insulation resistance: 500MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant

5	Board lock	Copper alloy	Plating: Ni
4	Cover	Thermoplastic	Color: black
3	Housing	Thermoplastic	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△			
△	2022/06/11	Change temperature range	Jack Chen
△	2022/03/08	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x. ±0.60	
CRITICAL	MAJOR	.x ±0.40	
▽:	▽:	.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:		VHDCI 68pin female double right angle,with board lock			PART NO.	B06-136B11AA-02	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/03/08	Huangmei	Jack Chen		B06-022
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		