
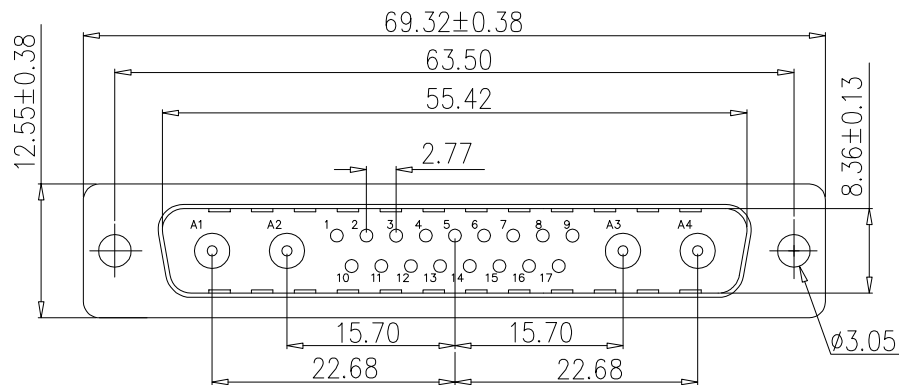


10A,20A,30A

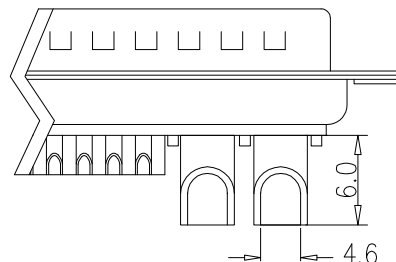

40A

Current rating:10/20/30/40 AMP.
Contact resistance:2.7 milliohms max.
Withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:−55℃ to +125℃
ROHS compliant
Part No.:

B08-BW43X1X0-X2

Housing color:

1:Black

3:Green

5:White

Terminal plated:

4: Au 2u"

5: Au 1u"

Current rating:

A:10A,Dim.A Ø1.7

B:20A,Dim.A Ø2.8

C:30A,Dim.A Ø3.2



D:40A,Dim.A Ø4.6

4	Housing	PBT+30%GF	Color:see part no.
3	Rear shell	SPCC	Plating:Sn
2	Front shell	SPCC	Plating:Ni
1	Terminal	Brass	Terminal plating: see part No.
Item	Desc.	Material	Remaks

				QUALITY SYMBOLS	Tolerance	NAME:	21W4 male solder,5.5mm cup			PART NO.	B08-BW43X1X0-X2		
△	2024/09/12	Add housing color,Add Terminal plating, Add dimension marking,Added 40A separate icon	Jack Chen	□: ☒:	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2015/04/23	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2015/04/23	Huangmei	Jack Chen		B08-030
				▽: ▽:	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C									

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

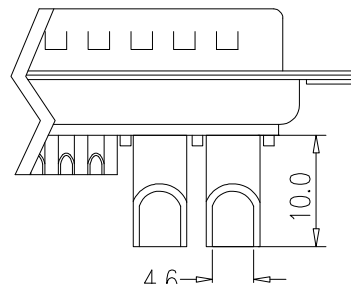

40A

D:40A,Dim.A $\phi 4.6$

21W4 male solder,8.5mm cup				PART NO.	B08-BW43X1X0-X1	
UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
DATE:	2015/01/06	Jing Li	King Zhou		B08-021	
 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770		

NAME:		21W4 male solder,8.5mm cup			PART NO.		B08-BW43X1X0-X1	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2015/01/06	Jing Li	King Zhou		B08-021	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			

http://www.lineconn.com
TEL:0769-85181660 85181770