

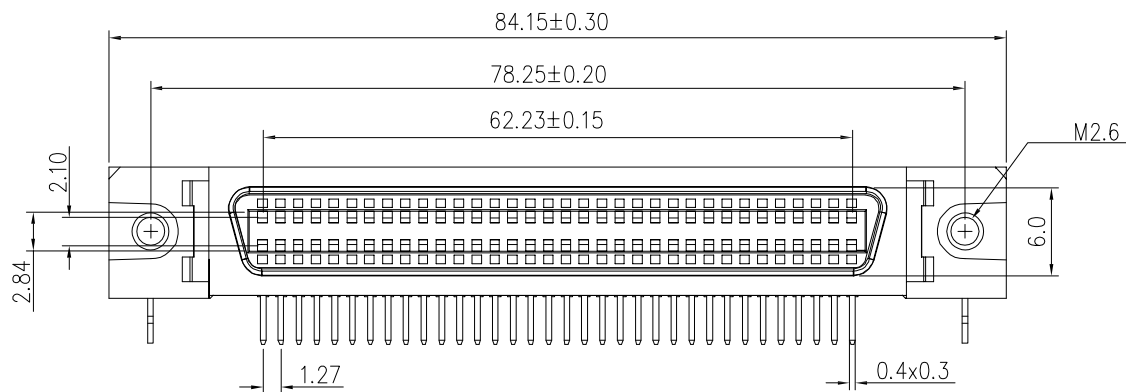



8 7 6 5 4 3 2 1

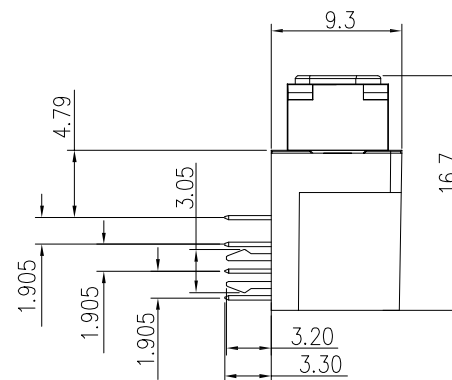

Current rating: 1 Amp
Insulation resistance: 500MΩ/Min
Withstanding voltage: 500V AC/Min
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +125℃
ROHS compliant

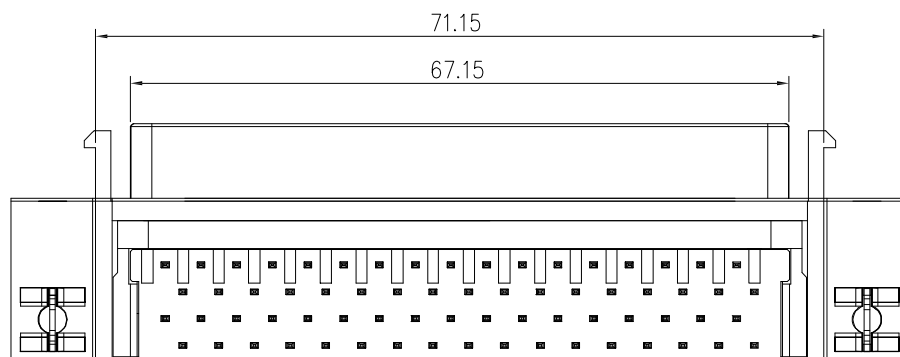

PCB EDGE

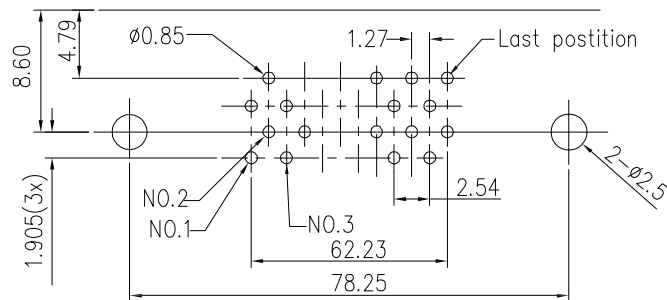

PCB layout

5	Bracket	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: G/F Under-plating: Ni
Item	Desc.	Material	Remark

Δ	2021/11/23	Changed plating of the terminal solder area	Shuo Cao
Δ	2021/06/04	Changed the part number	Jack Chen
Δ	2018/03/12	First edition release	Jing Li

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25

NAME:	SCSI(HPCN)100pin female right angle				PART NO.	B03-1006185B-02		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2018/03/12	John Liao	Shuo Cao		B03-026	

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770

8 7 6 5 4 3 2 1