

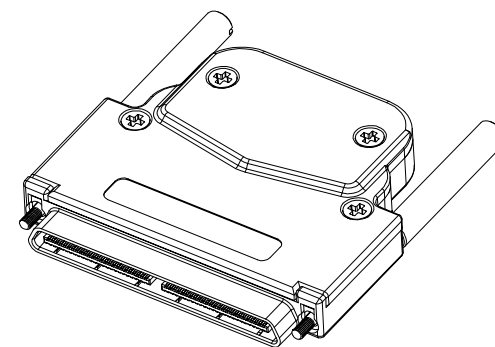
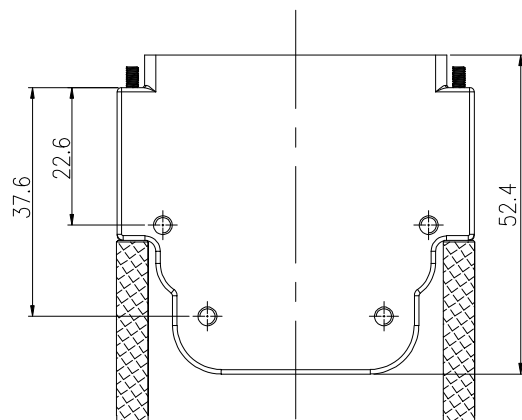
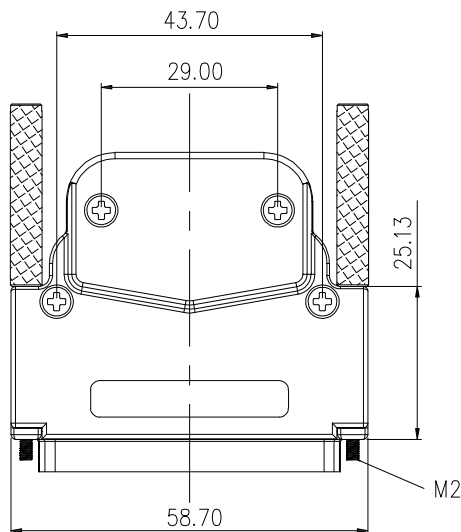
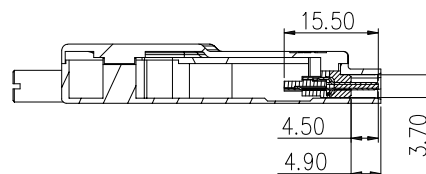
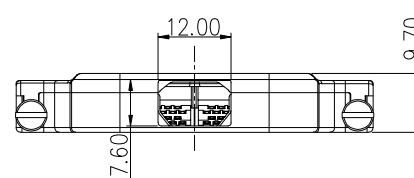


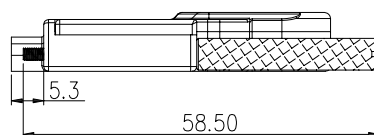

Current rating: 2 Amp
 Insulation resistance: 100MΩ/Min
 Withstanding voltage: 500V AC/Min
 Contact resistance: 50mΩ Max
 Temperature range: -45°C to +125°C
 ROHS compliant

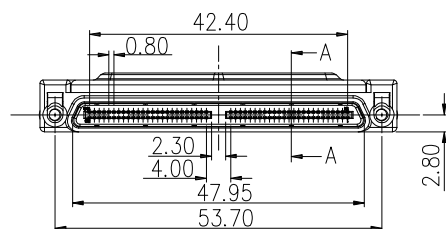

Section: A-A

5	Jackscrews	Steel	Plating: Ni
4	Cable clipper	Steel	Plating: Ni
3	Back shell	Zinc alloy	Plating: Ni
2	Housing	LCP+30%GF	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2020/05/08	Change part number	Shuo Cao
△	2018/10/27	Change tolerance	Jack Chen
△	2018/08/10	First edition release	Jack Chen

QUALITY SYMBOLS
 □: ☒:
 CRITICAL MAJOR
 ∇: ∇:
 ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	VHDCI 100pin male solder assembly, zinc alloy hood with screw				PART NO.	B06-100318AA-01		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2018/08/10	John Liao	Shuo Cao		B06-017	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL: 0769-85181660 85181770

8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---