


8 7 6 5 4 3 2 1

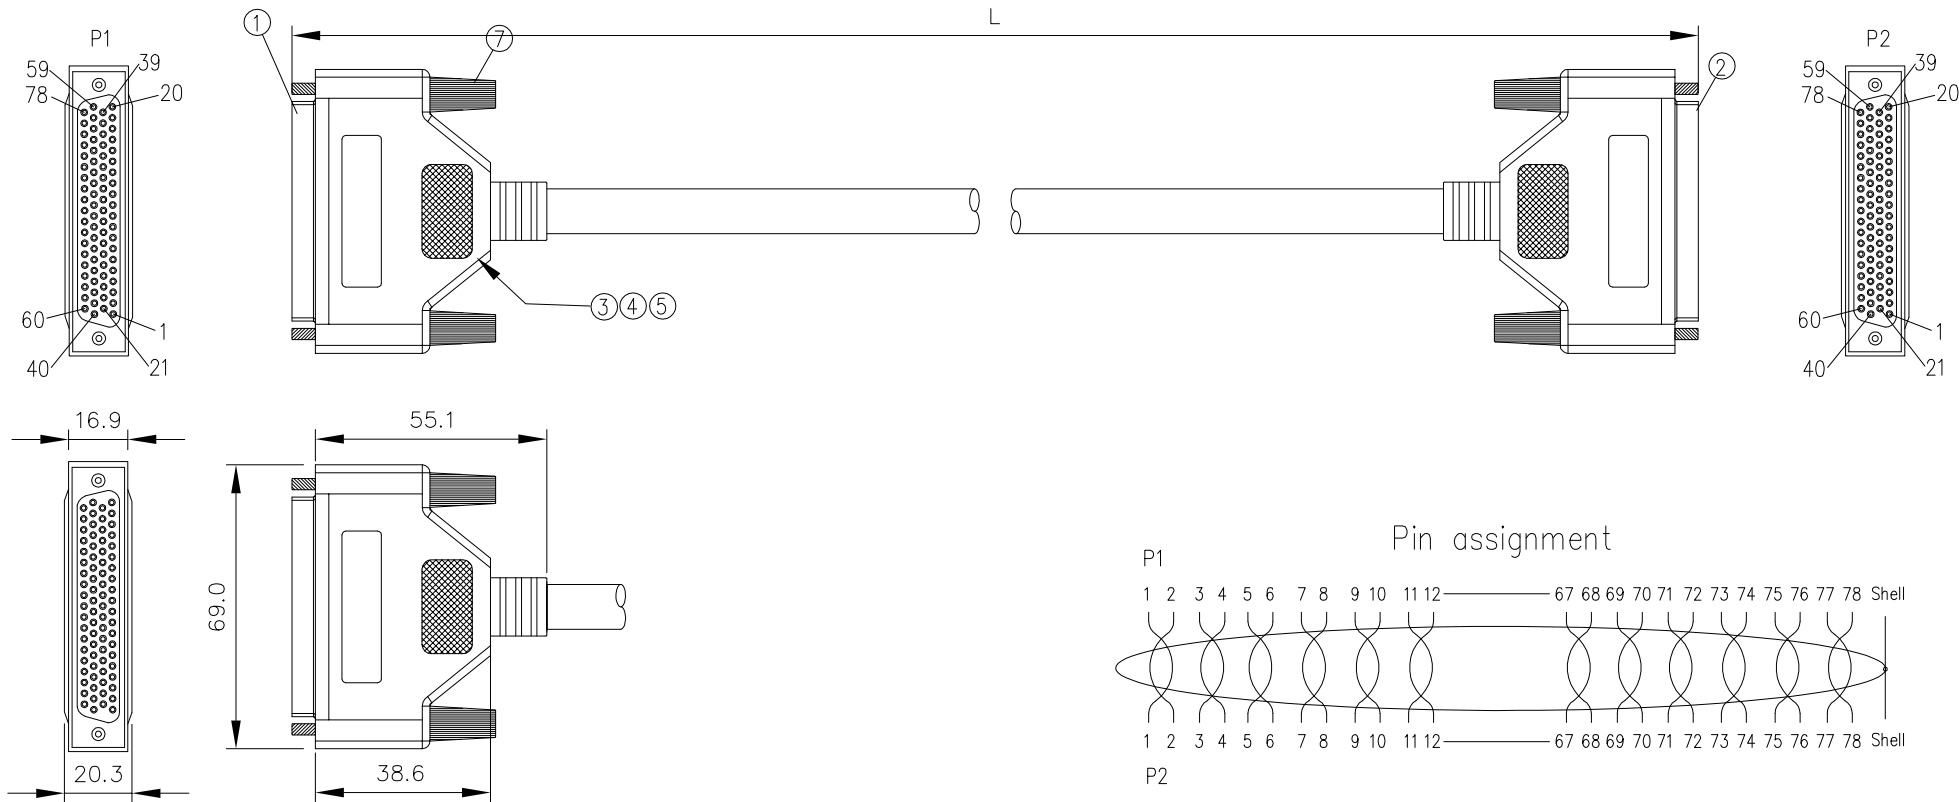

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part number description: A04-07821XXX-01,
XXX: 001=length:10cm

7	Screw	Screw 4-40# Ni(Q24 black)	4pcs
6	Cable	UL20276 28AWG*39P+AL+braid PVC jacket color:black OD=10.50mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Connector	HD-SUB 78pin female solder black type	1pcs
1	Connector	HD-SUB 78pin female solder black type	1pcs
Item	Part name	Description	QY'T

A	2021/06/07	Change part number	Jack Chen	QUALITY SYMBOLS □: ✖: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:		HD.D-SUB 78pin female to female cable				PART NO.		A04-07821XXX-01	
	A	2018/09/23	Add dimensioning over mold		Jack Chen	Length(mm)	Tolerance(mm)	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
						300~2000	±50									
						2001~5000	±100									
A	2017/11/11	First edition release	Jack Chen	5001~	±150	SCALE:	NONE	DATE:	2017/11/11	Huangmei	Jack Chen		A04-017			
SIDE	DATE	DESCRIPTION	APPROVER				lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770					

8 7 6 5 4 3 2 1