

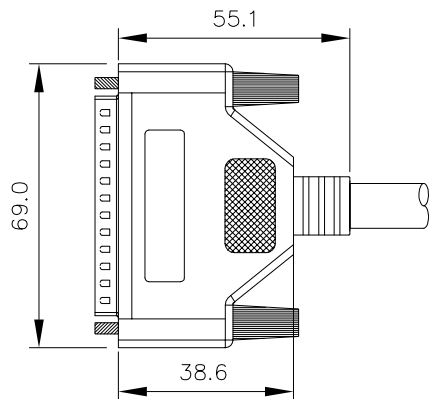
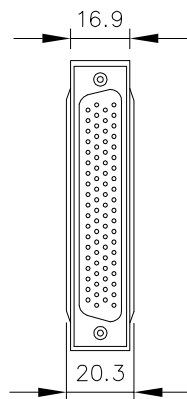
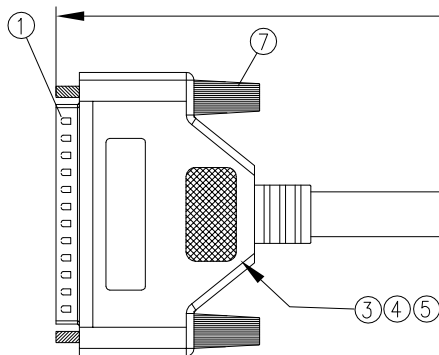


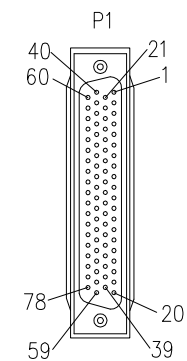

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part number description: A04-07811XXX-01,
XXX: 001=length:10cm

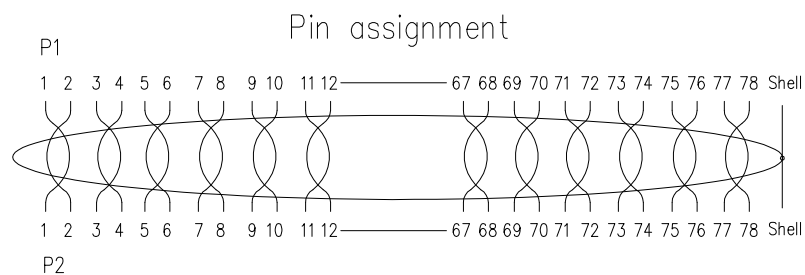

7	Screw	Screw 4-40# Ni(Q24 black)	4pcs
6	Cable	UL20276 28AWG*39P+AL+braid PVC jacket color:black OD=10.50mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Connector	HD-SUB 78pin male solder black type	1pcs
1	Connector	HD-SUB 78pin male solder black type	1pcs
Item	Part name	Description	QY'T

△	2021/06/07	Change part number	Jack Chen
△	2018/09/23	Add dimensioning over mold	Jack Chen
△	2017/11/11	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance		NAME:		HD.D-SUB 78pin male to male cable		PART NO.		A04-07811XXX-01	
□:	☒:	Length(mm)	Tolerance(mm)	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
		300~2000	±50	SCALE:	NONE	DATE:	2017/11/11	Huangmei	Jack Chen		A04-016
		2001~5000	±100								
		5001~	±150								
CRITICAL MAJOR		ZERO DEFECT S.P.C		lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com		TEL:0769-85181660 85181770			
											