


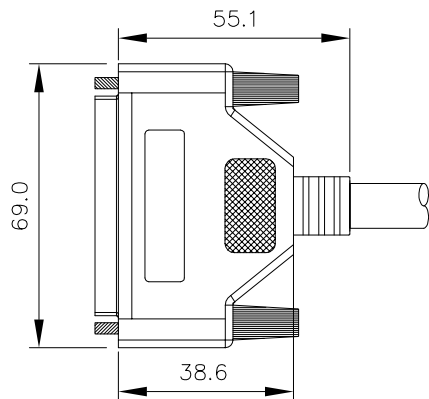
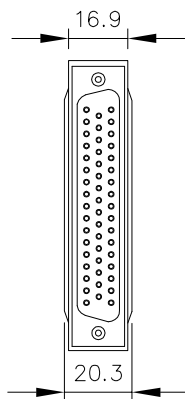
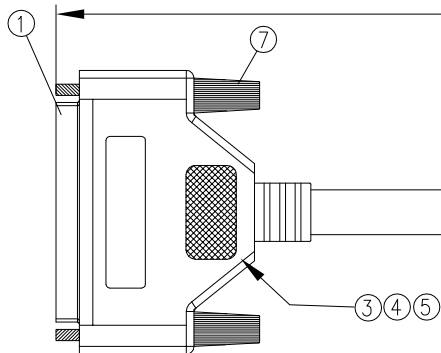


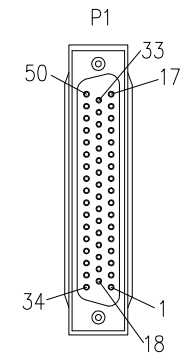

L

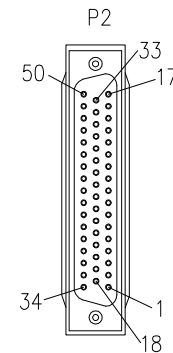

Pin assignment

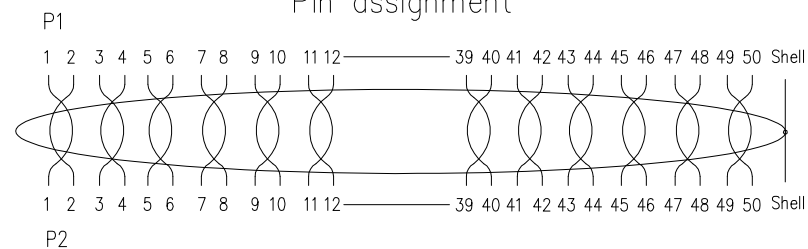

Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance:5 ohms max.
- 3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
- 4.ROHS compliant
- 5.Part number description: A05-05021XXX-01, XXX: 001=length:10cm

7	Screw	Screw 4-40# Ni(Q24 black)	4pcs
6	Cable	UL20276 25P*28AWG+AL+braid PVC jacket color:black OD 8.50mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Connector	D-SUB 50pin female solder black type	1pcs
1	Connector	D-SUB 50pin female solder black type	1pcs
Item	Part name	Description	QY'T

△	2021/06/07	Change part number	Jack Chen
△	2018/09/23	Add dimensioning over mold	Jack Chen
△	2017/08/12	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
Length(mm)	Tolerance(mm)
300~2000	±50
2001~5000	±100
5001~	±150

NAME:	D-SUB 50pin female to female cable				PART NO.	A05-05021XXX-01		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	NONE	DATE:	2017/08/12	Huangmei	Jack Chen		A05-017	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			