
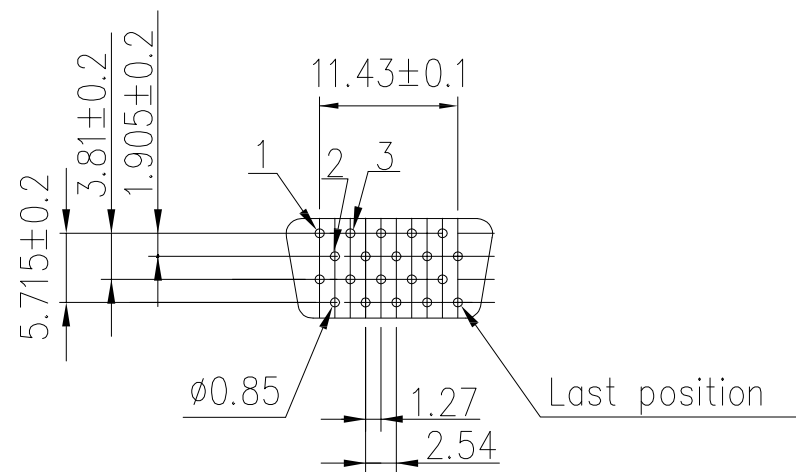
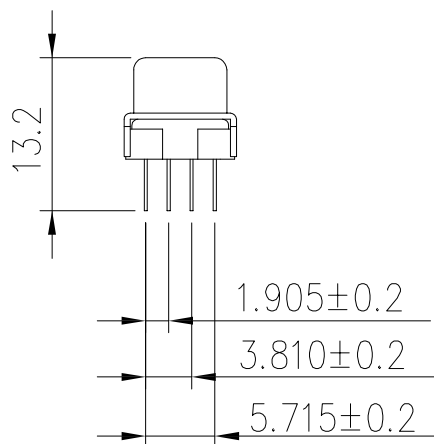
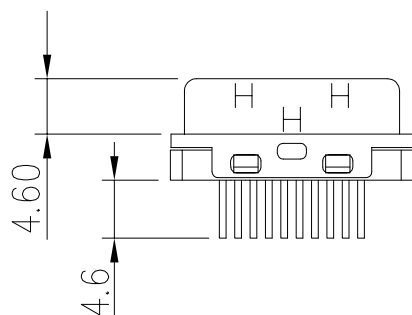


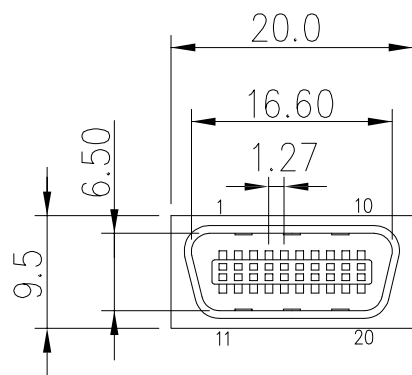


PCB Layout

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +105℃
ROHS compliant

3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

A	△				QUALITY SYMBOLS	Tolerance	NAME:	SCSI 20pin male vertical for PCB			PART NO.	B03-020711EN-A1		
	△	2020/07/19	Changed the part number	Shuo Cao	□: ☒:	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2016/04/09	First edition release	King Zhou	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2016/04/09	Huangmei	Shuo Cao		B03-136
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	.xx ±0.25								



Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770