
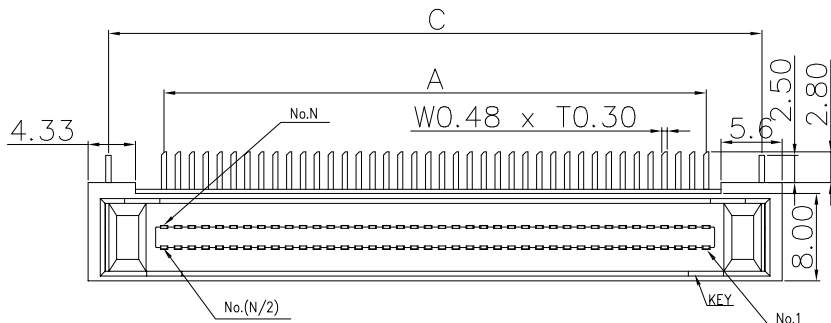


PCB Layout
(40,60,80,100,120Pin)

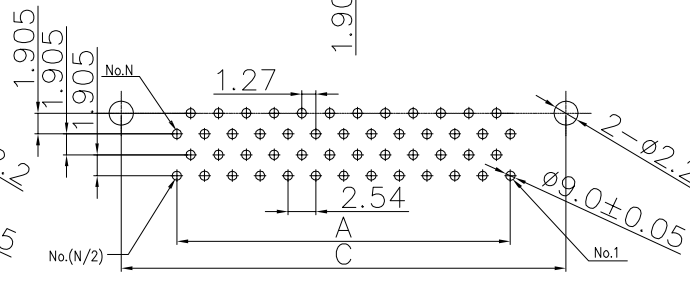

PCB Layout
(30,50Pin)

Pin	Dimension mm		
	A	B	C
30	17.78	31.7	27.94
40	24.13	38.0	34.29
50	30.48	44.4	40.64
60	36.83	50.7	46.99
80	49.53	63.4	59.69
100	62.23	76.1	72.39
120	74.93	88.8	85.09

Current rating: 1A
Withstanding voltage: 500V AC
Contact resistance: 30 mΩ Max.
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant
Part no.:

B22-XXX51NCN-01
NO.OF PIN:
20: 20P
30: 30P
40: 40P
50: 50P
60: 60P
80: 80P
100: 100P
120: 120P

3	Board lock	Copper alloy	PlatinG: Tin
2	Housing	PBT+30%GF	Color: black
1	Terminal	Phosphor bronze	Contact area: Au 3u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△			
△			
△	2019/10/09	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	.x	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		OPS male right angle, enhanced type			PART NO.		B22-XXX51NCN-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2019/10/09	Dawn Hu	King Zhou		B22-004	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com			
					TEL:0769-85181660 85181770			