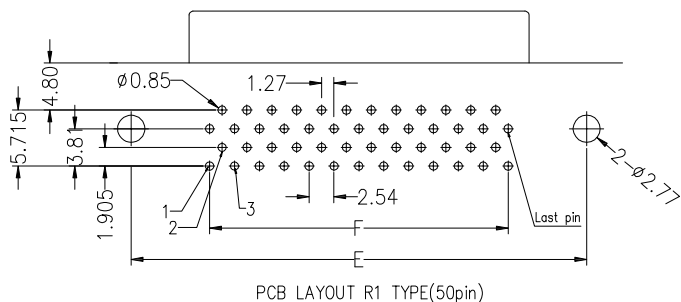

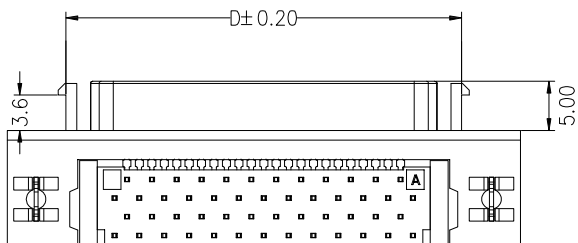
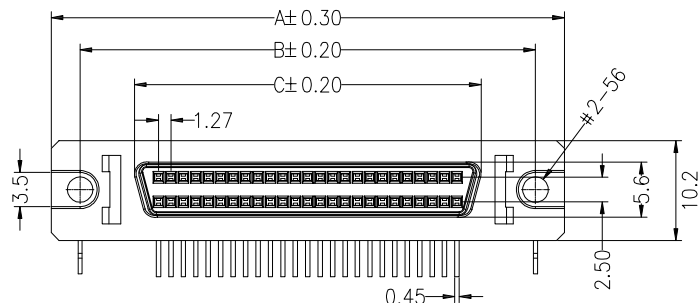


Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Temperature range: -55℃ to +125℃
Contact resistance: 35mΩ Max.
Part No.:

B02-XXX6185C-XJ
No. of contact: _____
50: 50pin
68: 68pin
100: 100pin
PCB Layout: _____
1: R1 type (50pin)
2: R2 type (68pin, 100pin)

3	Housing	PBT UL94V-0	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

				QUALITY SYMBOLS	Tolerance	NAME:	HPDB female right angle(50,68,100pin)				PART NO.	B02-XXX6185C-XJ		
	2023/03/11	Change operating temperature	Jack Chen	: :	.x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B02-084	
		2022/12/04	First edition release	Jack Chen	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2022/12/04	Huangmei	Jack Chen		
					: :	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C		lineconn 东莞市林诚塑胶电子有限公司							http://www.lineconn.com TEL:0769-85181660 85181770	