
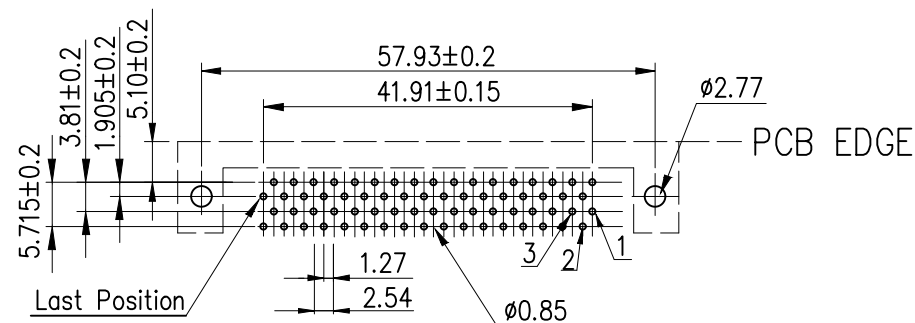

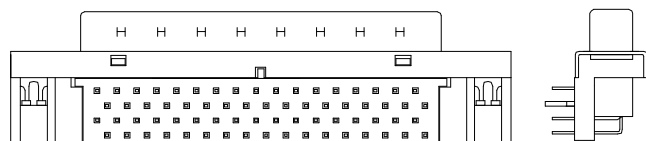


L type

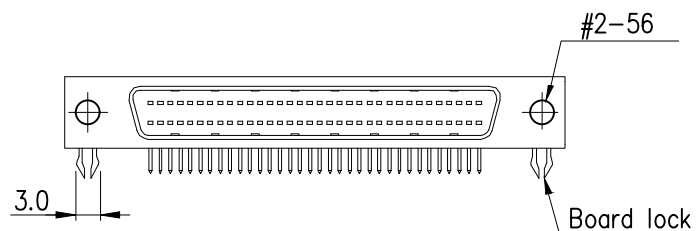

PCB layout

Contact rating:1 AMP.

Contact resistance: 35 mΩ/max.

Withstanding voltage:500V AC

Insulation resistance:500MΩ/Min.

Temperature range: -45°C to $+125^{\circ}\text{C}$

ROHS compliant

Part No.:

B02-068511EC-2X

Bracket finishes:

L: latch bracket

S: screw bracket

5	Bracket	Steel	Plating: Sn
4	Blard lock	Copper alloy	Plating: Ni
3	Front shell	Steel	Plating: Ni
2	Housing&cover	L.C.P UL94V-0	Color: black
1	Terminal	Phosphor bronze	Plating: Au 5u"
Item	Desc.	Material	Remaks

	2017/12/04	Correction part number	Jack Chen	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME: SCSI II(HPDB)68pin male right angle,1pin in second row				PART NO.		B02-068511EC-2X	
	2017/10/26	Add pin bit annotation	Jack Chen		x. ±0.60	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B02-052	
	2015/06/03	First edition release	Jack Chen		.x ±0.40	SCALE:	N:1	DATE:	2015/06/03	Huangmei	Jack Chen			
SIDE	DATE	DESCRIPTION	APPROVER		.xx ±0.25	 		lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com						
							TEL:0769-85181660 85181770							