
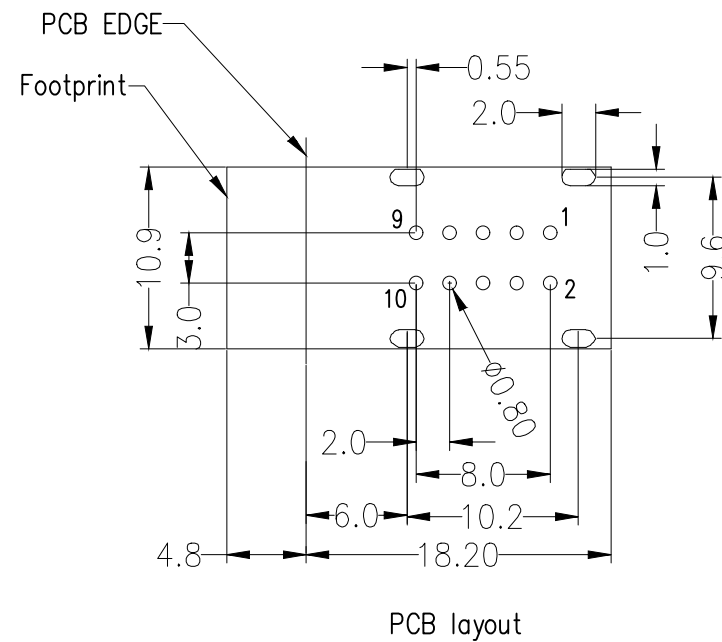
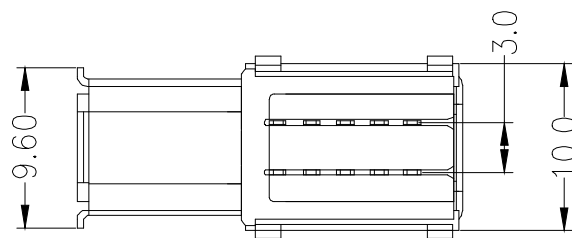
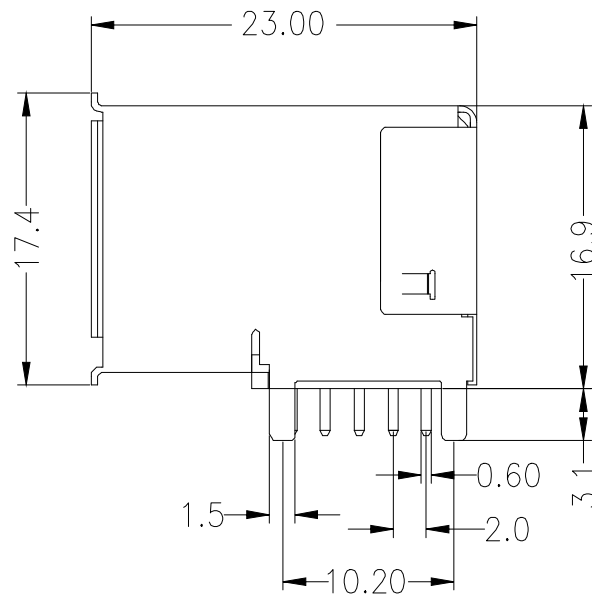


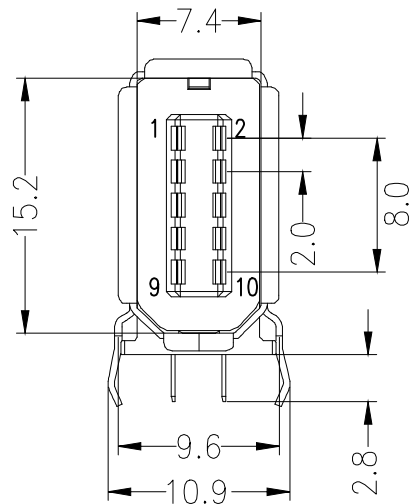

Current rating: 1.5 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 1000MΩ min.
Temperature range: -25℃ to +85℃
ROHS compliant

3	Shell	Copper alloy	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: G/F
Item	DESC.	Material	Remarks

	2024/03/22	Change tolerance	Jack Chen	QUALITY SYMBOLS □: CRITICAL ☒: MAJOR ▽: ZERO DEFECT ▽: S.P.C	Tolerance		NAME:		SM 10P female lateral right angle				PART NO.		B01-010A13AN-01	
	2023/12/15	Change part number	Jack Chen		.x ±0.60 .x ±0.40 .xx ±0.25	REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B01-024			
	2019/11/06	New issue	Jing Li		SCALE:	N:1	DATE:	2019/11/06	Huangmei	Jack Chen						
SIDE	DATE	DESCRIPTION	APPROVER			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770										