


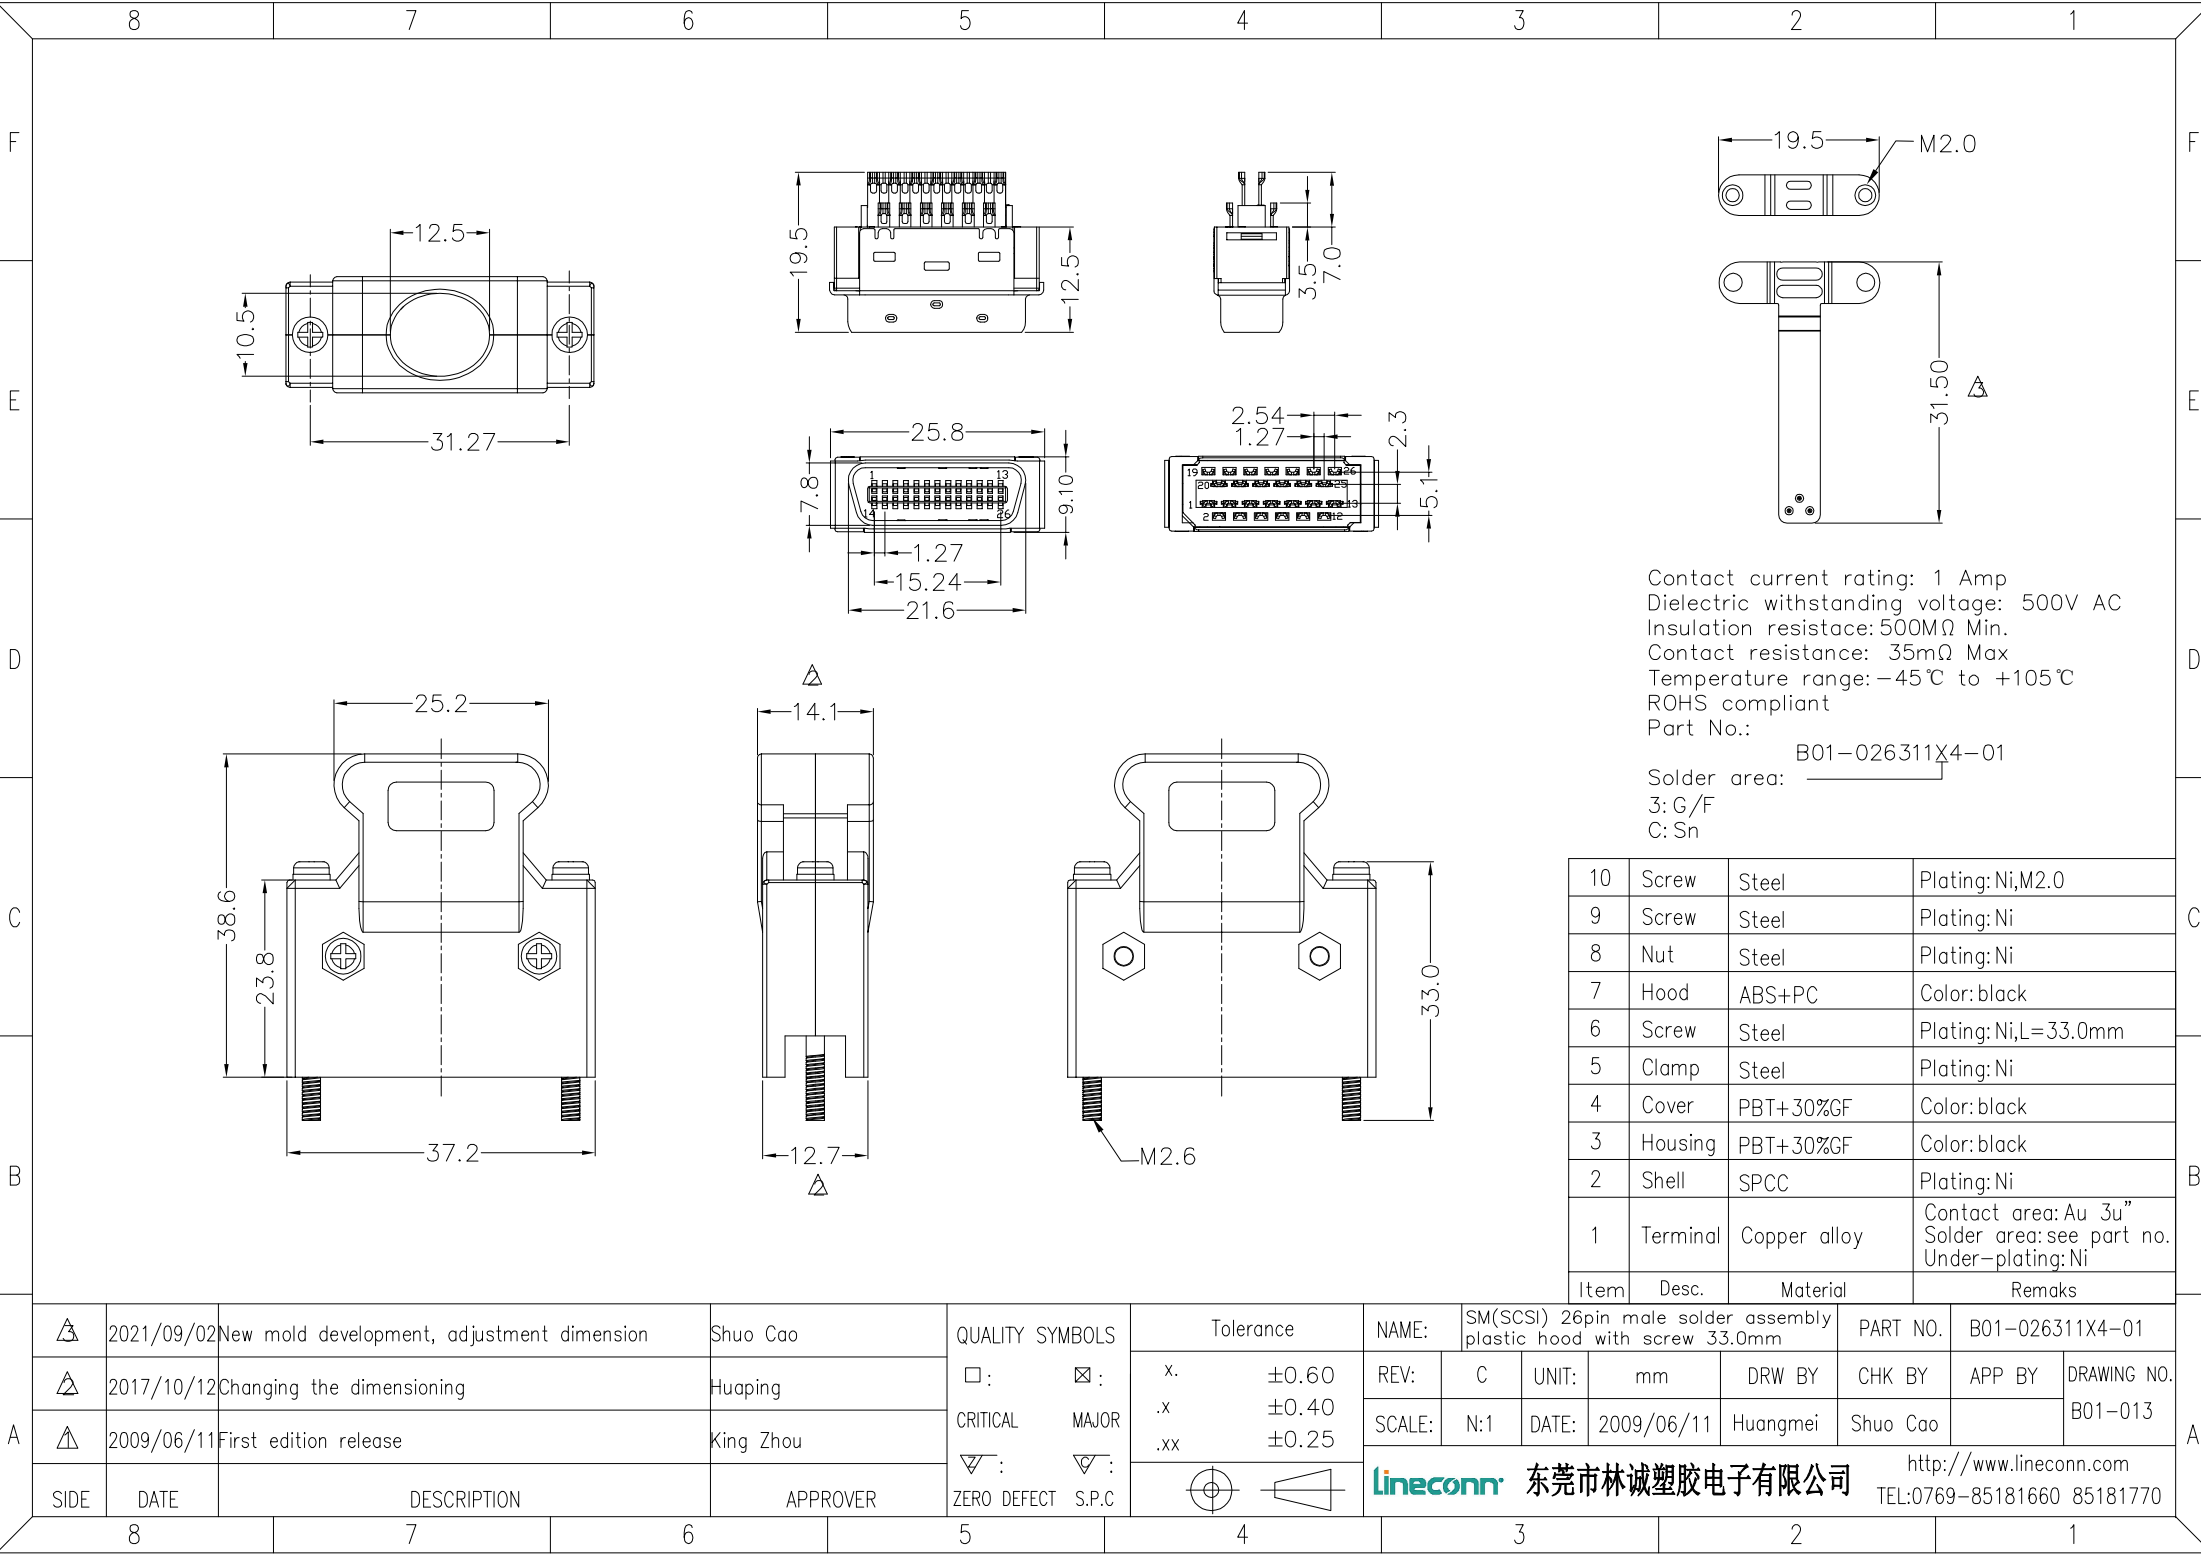

Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω Max
Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
ROHS compliant
Part No.:

Solder area: B01-026311X4-01
3: G/F
C: Sn

10	Screw	Steel	Plating: Ni, M2.0
9	Screw	Steel	Plating: Ni
8	Nut	Steel	Plating: Ni
7	Hood	ABS+PC	Color: black
6	Screw	Steel	Plating: Ni, L=33.0mm
5	Clamp	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni

Item	Desc.	Material	Remarks
------	-------	----------	---------

2021/09/02	New mold development, adjustment dimension	Shuo Cao
2017/10/12	Changing the dimensioning	Huaping
2009/06/11	First edition release	King Zhou


SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:

SM(SCSI) 26pin male solder assembly
plastic hood with screw 33.0mm

REV:

C UNIT: mm DRW BY CHK BY APP BY DRAWING NO.

SCALE:

N:1 DATE: 2009/06/11 Huangmei Shuo Cao B01-013

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770