
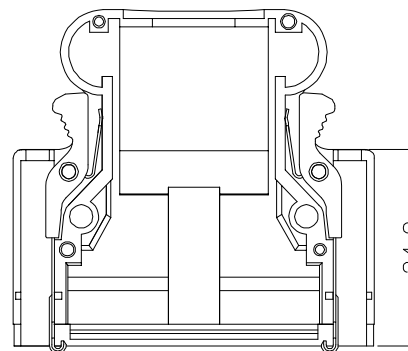
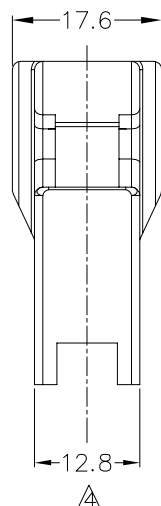
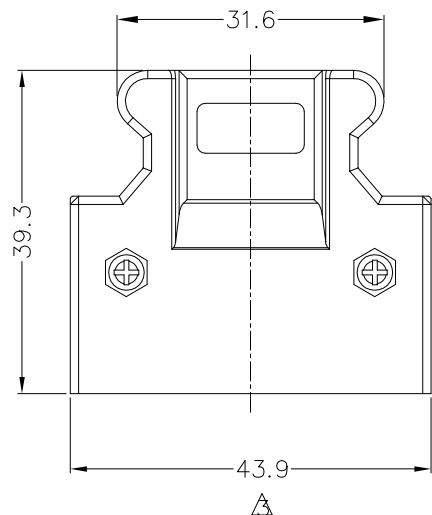
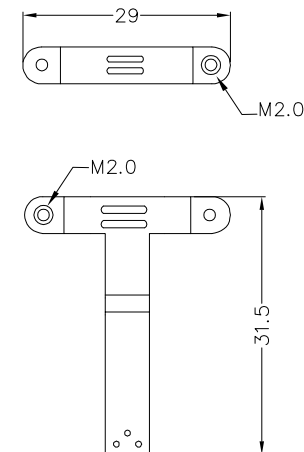

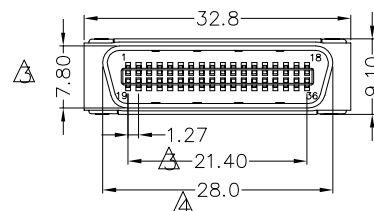




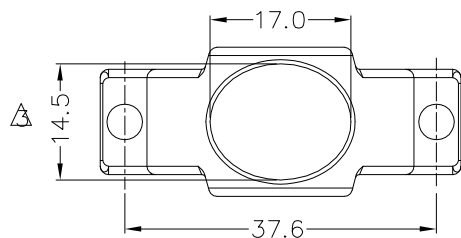

Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +105℃
ROHS compliant
Part No.:

B01-036311X2-01

Solder area:
3: G/F
C: Sn

10	Screw	Steel	Plating: Ni, M2.0
9	Screw	Steel	Plating: Ni
8	Nut	Steel	Plating: Ni
7	Hood	PBT+30%GF	Color: black
6	Latch	ABS, SUS 304	Color: black
5	Clamp	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remarks

2022/08/19	New mold development, adjustment dimension	Shuo Cao
2018/12/26	Changing the dimensioning	Huaping
2009/06/11	First edition release	King Zhou


SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS

□: ☒: x. ±0.60
CRITICAL MAJOR .x ±0.40
ZERO DEFECT S.P.C .xx ±0.25

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:

SM(SCSI) 36pin male solder assembly
plastic hood with latch

REV:

D

UNIT:

mm

DRW BY

CHK BY

APP BY

SCALE:

N:1

DATE:

2009/06/11

Huangmei

Shuo Cao

B01-016

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770