




Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω Max
Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
ROHS compliant
Part No.:

B01-050311X2-01

Solder area:

3: G/F

C: Sn

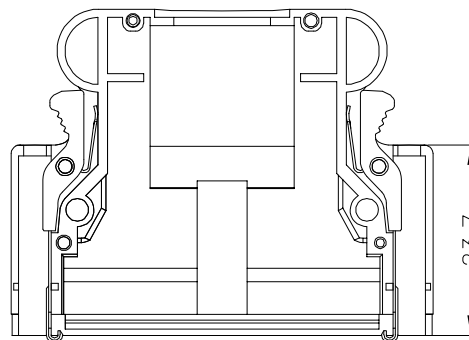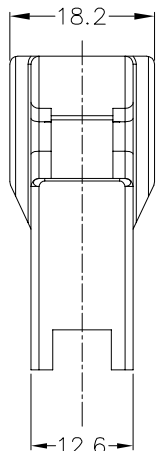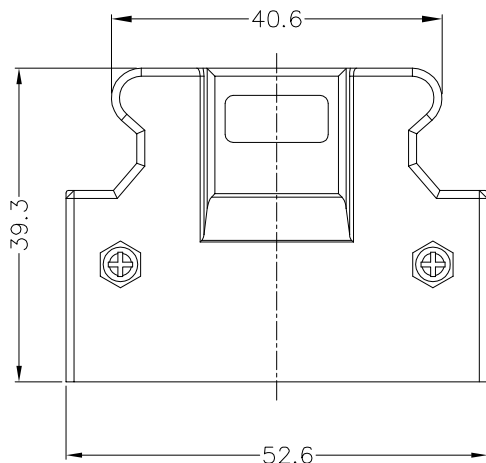

10	Screw	Steel	Plating: Ni, M2.0
9	Screw	Steel	Plating: Ni
8	Nut	Steel	Plating: Ni
7	Hood	PBT+30%GF	Color: black
6	Latch	ABS, SUS 304	Color: black
5	Clamp	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remarks

△	2023/11/09	Add ROHS comment	Shuo Cao
△	2010/04/27	Add solder area plating sn type	King Zhou
△	2009/06/11	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS

□: ☒:

CRITICAL MAJOR

▽: ▽:


ZERO DEFECT S.P.C

Tolerance

.x. ± 0.60

.x ± 0.40

.xx ± 0.25



NAME:

SM(SCSI) 50pin male solder assembly
plastic hood with latch

PART NO.

B01-050311X2-01

REV:

C

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2009/06/11

Huangmei

Shuo Cao

B01-017

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770