


Pin no.	A	B	C	D
15	16.9	25.0	30.8	19.3
26	25.2	33.3	39.1	27.5
44	39.0	47.0	53.0	41.3
62	55.4	63.5	69.3	57.7

Voltage current rating:5 AMP.
Dielectric withstanding voltage:1000V AC
Insulation resistance:1000MΩ Min.
Temperature range:−55℃ to +125℃
ROHS compliant

Part No.: B04-0XX3X1XN-02
No.of contact:
15: 15pos
26: 26pos
44: 44pos
62: 62pos
Housing color:
1: Black
5: White
6: Blue
Terminal plating:
3: full Au 3u”
4: full Au 2u”
5: full Au 1u”

4	Rear shell	SPCC	Plating:Sn
3	Front shell	SPCC	Plating:Ni
2	Housing	PBT+30%GF	Color:see part no.
1	Terminal	Copper alloy	Plating:see part no.
Item	Desc.	Material	Remark

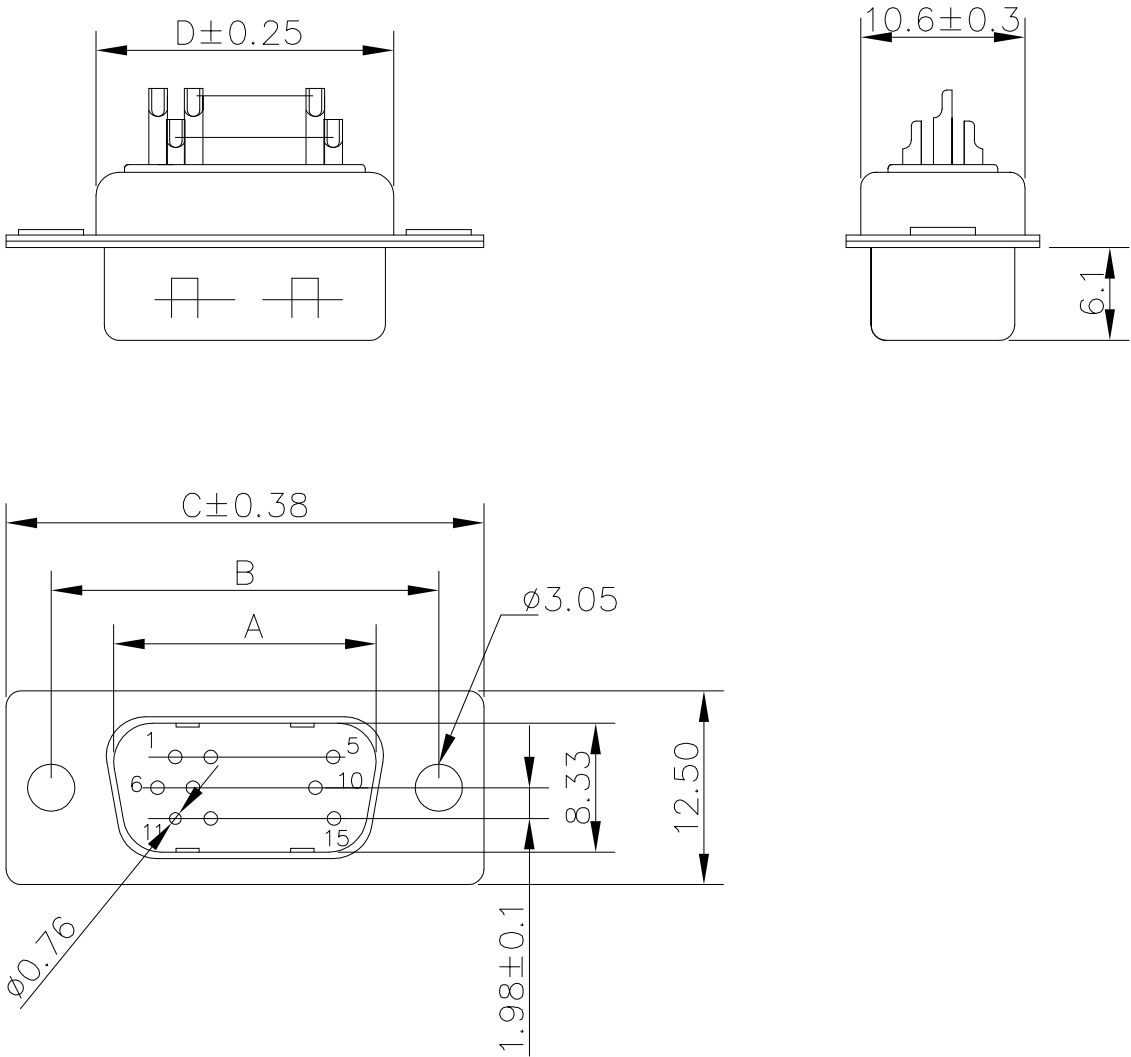

△	2024/08/15	Add Terminal plating type	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:	HD.D-SUB male solder,machined pin				PART NO.	B04-0XX3X1XN-02	
△	2023/10/22	Add ROHS comment	Jack Chen		x. ±0.60	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
△	2009/04/14	First edition release	Jing Li		.x ±0.40	SCALE:	N:1	DATE:	2009/04/14	Huangmei	Jack Chen		B04-001	
					.xx ±0.25									
SIDE	DATE	DESCRIPTION	APPROVER				lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							