


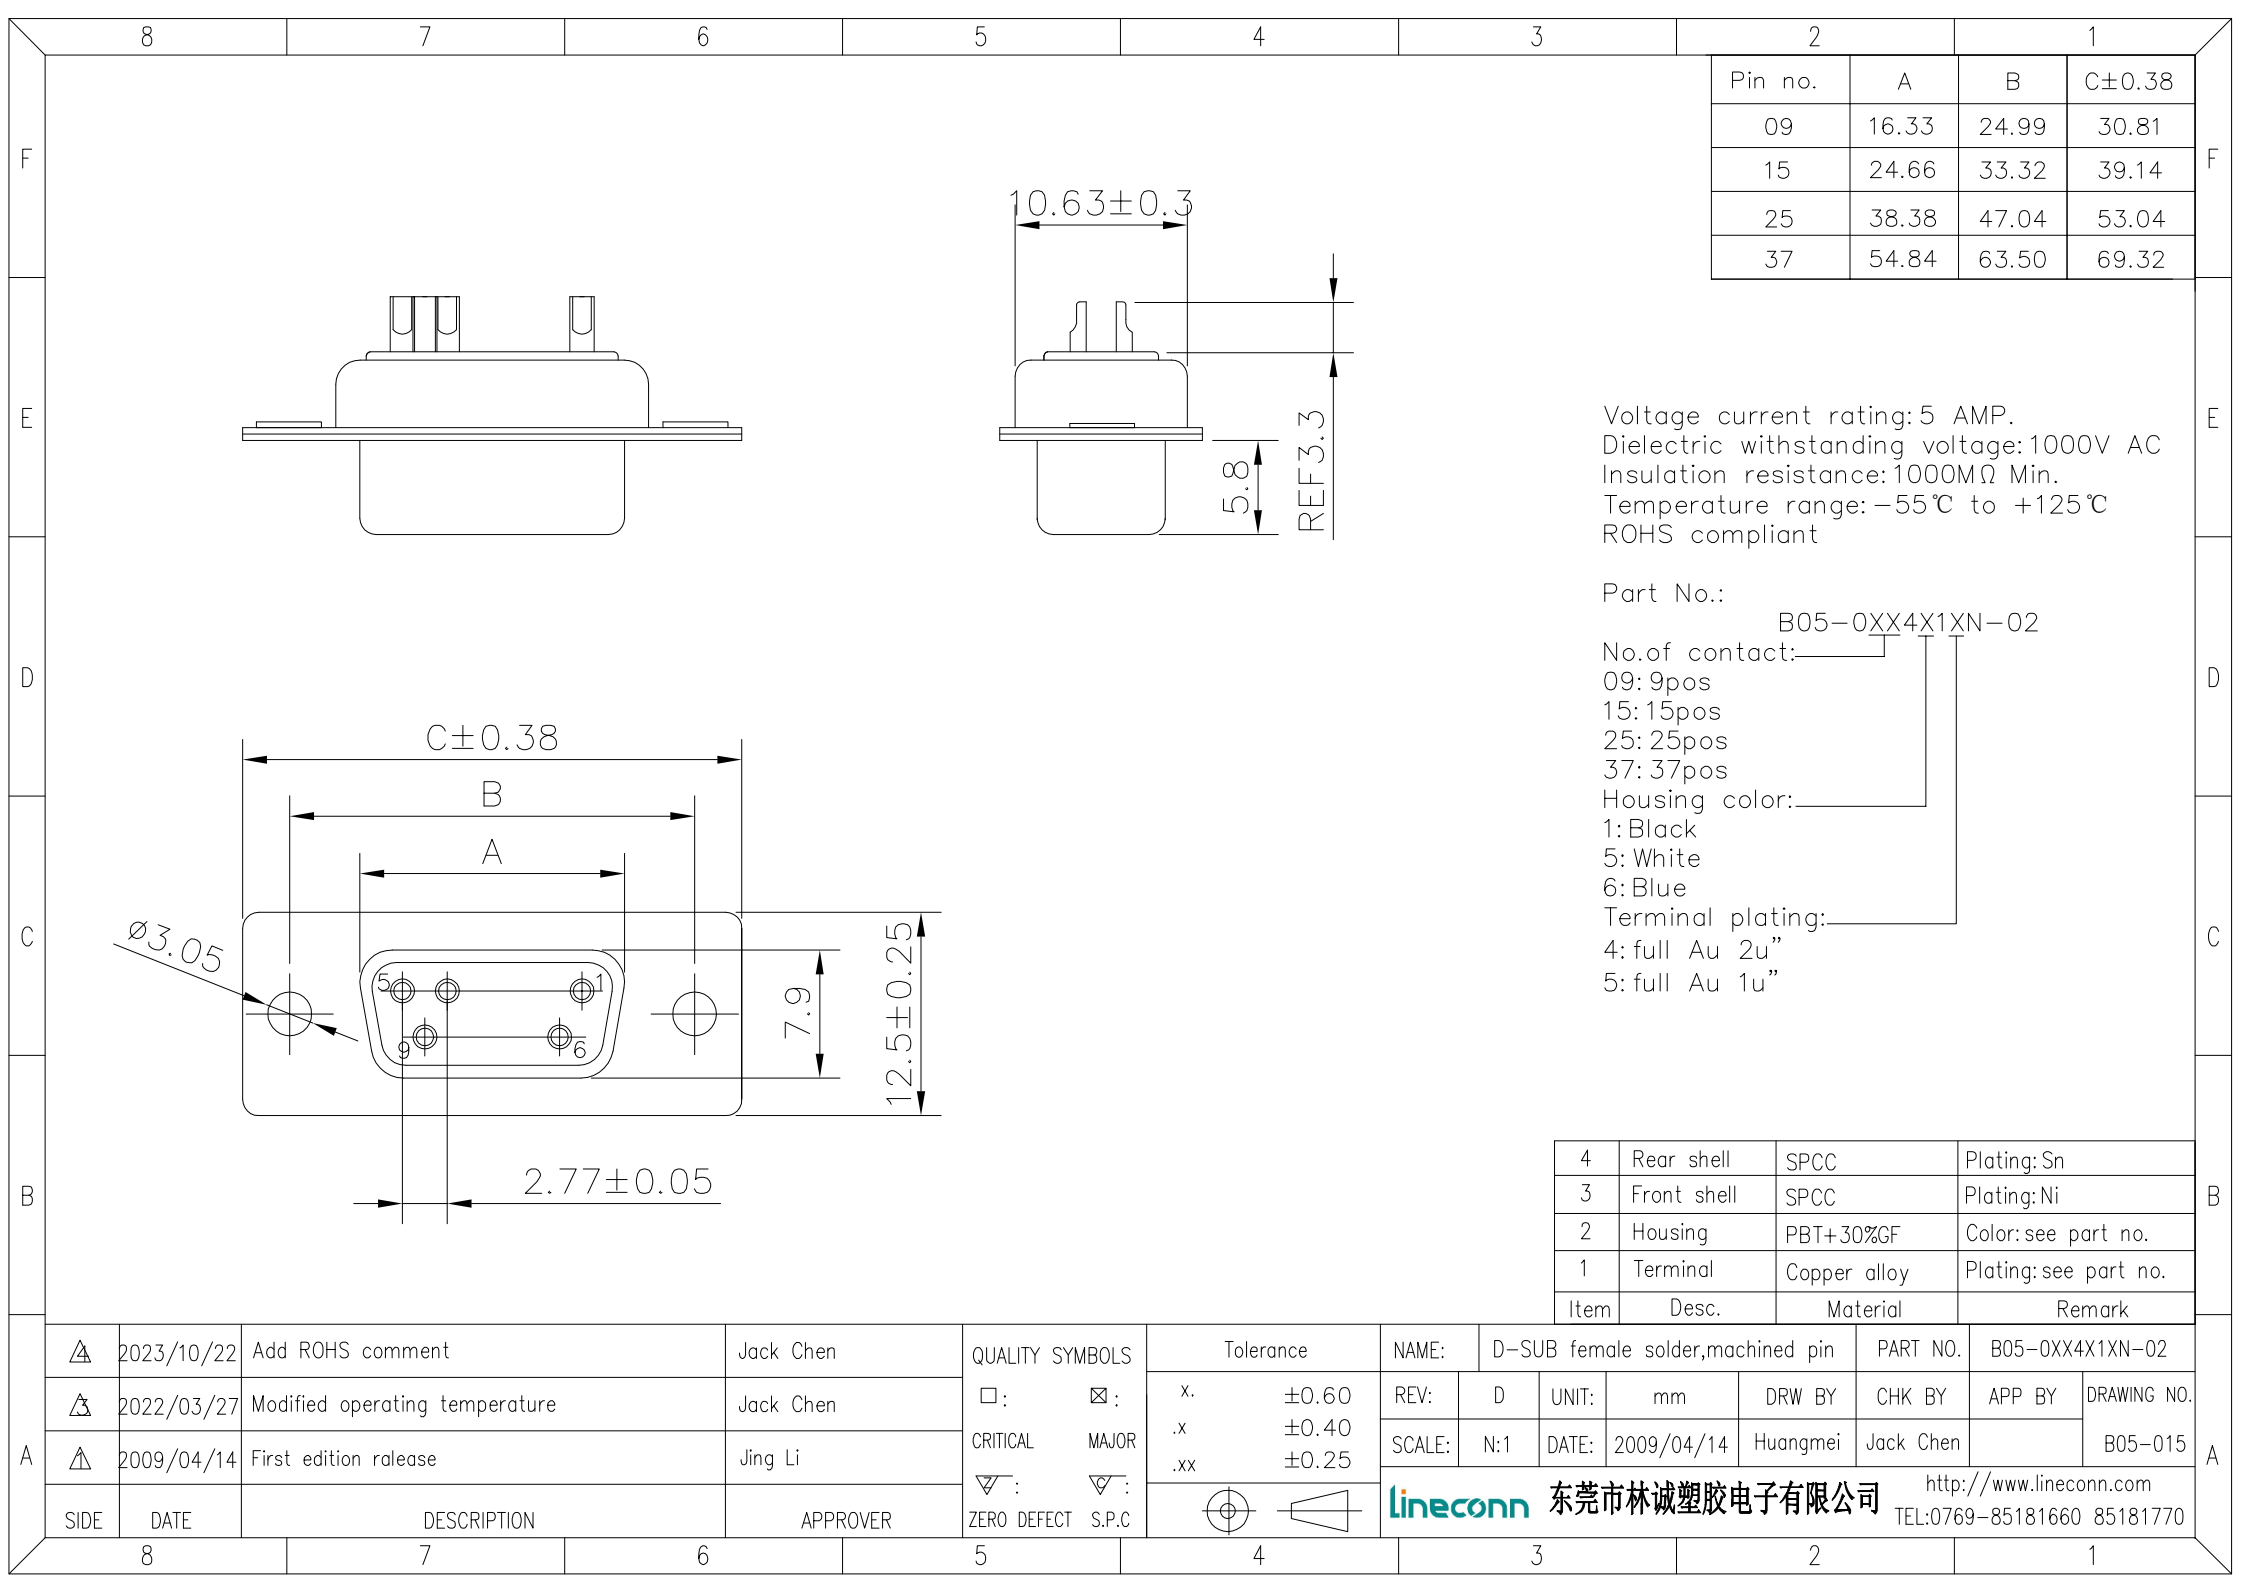

Pin no.	A	B	C $\pm$ 0.38
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

Voltage current rating:5 AMP.
Dielectric withstanding voltage:1000V AC
Insulation resistance:1000M Ω Min.
Temperature range:-55 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant

Part No.:
B05-0XX4X1XN-02
No.of contact:
09: 9pos
15: 15pos
25: 25pos
37: 37pos
Housing color:
1: Black
5: White
6: Blue
Terminal plating:
4: full Au 2u"
5: full Au 1u"

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2023/10/22	Add ROHS comment	Jack Chen	QUALITY SYMBOLS	Tolerance	NAME:	D-SUB female solder,machined pin				PART NO.	B05-0XX4X1XN-02	
△	2022/03/27	Modified operating temperature	Jack Chen	□: ☒:	x. ±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B05-015
△	2009/04/14	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40 .xx ±0.25	SCALE:	N:1	DATE:	2009/04/14	Huangmei	Jack Chen		
SIDE	DATE	DESCRIPTION	APPROVER	▽: ▽:	 	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
													TEL:0769-85181660 85181770