
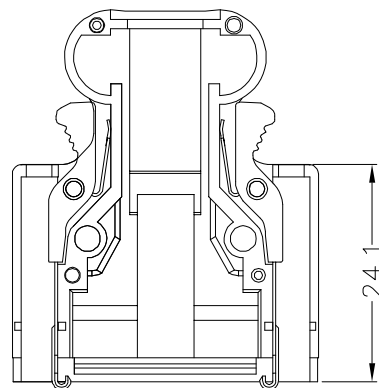
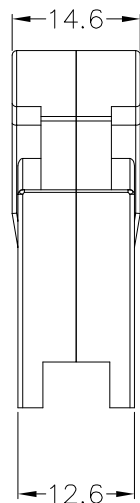
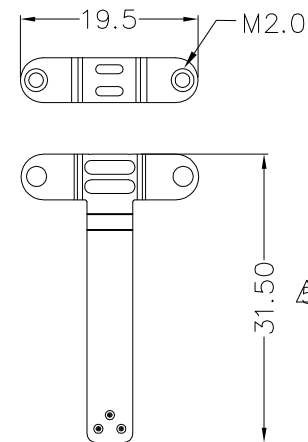




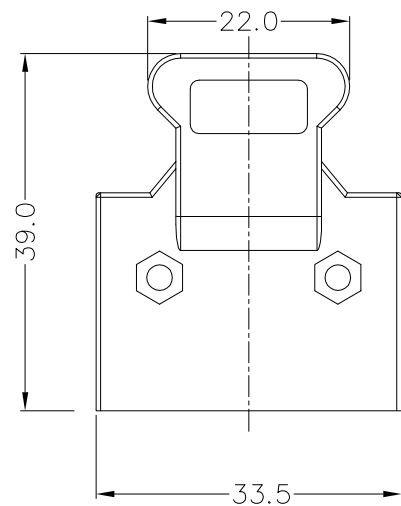


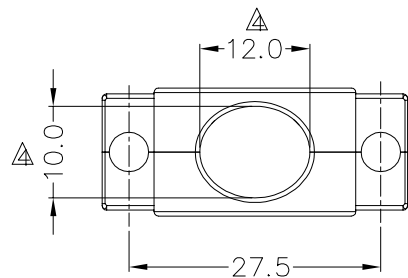

Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω Max
Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
ROHS compliant
Part No.:

B01-020311X2-01

Solder area:

3: G/F

C: Sn

10	Screw	Steel	Plating: Ni, M2.0
9	Screw	Steel	Plating: Ni
8	Nut	Steel	Plating: Ni
7	Hood	PBT+30%GF	Color: black
6	Latch	ABS, SUS 304	Color: black
5	Clamp	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3 μ " Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remarks

△

2022/07/13

Added the size of the cable clamp

Shuo Cao

QUALITY SYMBOLS

Tolerance

NAME:

SM(SCSI) 20pin male solder assembly
plastic hood with latch

PART NO.

B01-020311X2-01

△

2021/11/24

Added the size of the outlet hole

Shuo Cao

□: □:

x. ± 0.60

REV:

D

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

△

2009/06/04

First edition release

King Zhou

CRITICAL MAJOR

.x ± 0.40

SCALE:

N:1

DATE:

2009/06/04

Huangmei

Shuo Cao

B01-014

SIDE

8

DATE

7

DESCRIPTION


6

APPROVER

5

ZERO DEFECT S.P.C

4



4

Lineconn

东莞市林诚塑胶电子有限公司

<http://www.lineconn.com>

TEL: 0769-85181660 85181770

3

2

1