
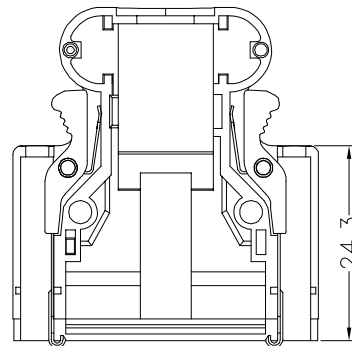
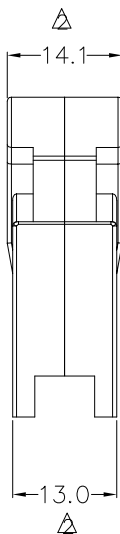
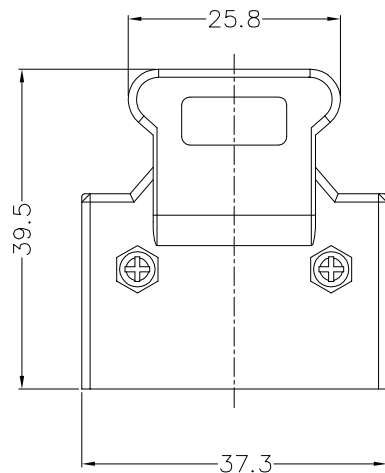








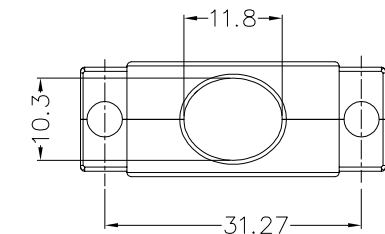

Contact current rating: 1 Amp  
Dielectric withstanding voltage: 500V AC  
Insulation resistance: 500MΩ Min.  
Contact resistance: 35mΩ Max  
Temperature range: -45℃ to +105℃  
ROHS compliant  
Part No.:

B01-026311X2-01

Solder area: \_\_\_\_\_  
3: G/F  
C: Sn

|      |          |              |                                                                        |
|------|----------|--------------|------------------------------------------------------------------------|
| 10   | Screw    | Steel        | Plating: Ni, M2.0                                                      |
| 9    | Screw    | Steel        | Plating: Ni                                                            |
| 8    | Nut      | Steel        | Plating: Ni                                                            |
| 7    | Hood     | PBT+30%GF    | Color: black                                                           |
| 6    | Latch    | ABS, SUS 304 | Color: black                                                           |
| 5    | Clamp    | Steel        | Plating: Ni                                                            |
| 4    | Cover    | PBT+30%GF    | Color: black                                                           |
| 3    | Housing  | PBT+30%GF    | Color: black                                                           |
| 2    | Shell    | SPCC         | Plating: Ni                                                            |
| 1    | Terminal | Copper alloy | Contact area: Au 3u"<br>Solder area: see part no.<br>Under-plating: Ni |
| Item | Desc.    | Material     | Remarks                                                                |

|      |            |                           |           |
|------|------------|---------------------------|-----------|
| △    |            |                           |           |
| △    | 2017/10/12 | Changing the dimensioning | Huaping   |
| △    | 2009/06/14 | First edition release     | King Zhou |
| SIDE | DATE       | DESCRIPTION               | APPROVER  |
| 8    | 7          | 6                         | 5         |

|                 |       |
|-----------------|-------|
| QUALITY SYMBOLS |       |
| □:              | ☒:    |
| CRITICAL        | MAJOR |
| ▽:              | ▽:    |
| ZERO DEFECT     | S.P.C |

|           |       |
|-----------|-------|
| Tolerance |       |
| x.        | ±0.60 |
| .x        | ±0.40 |
| .xx       | ±0.25 |
| ⊕         | ⊖     |

|                        |     |                                                                |            |          |                                                       |                 |                        |
|------------------------|-----|----------------------------------------------------------------|------------|----------|-------------------------------------------------------|-----------------|------------------------|
| NAME:                  |     | SM(SCSI) 26pin male solder assembly<br>plastic hood with latch |            |          | PART NO.                                              | B01-026311X2-01 |                        |
| REV:                   | B   | UNIT:                                                          | mm         | DRW BY   | CHK BY                                                | APP BY          | DRAWING NO.<br>B01-015 |
| SCALE:                 | N:1 | DATE:                                                          | 2009/06/14 | Huangmei | Huaping                                               |                 |                        |
| lineconn 东莞市林诚塑胶电子有限公司 |     |                                                                |            |          | http://www.lineconn.com<br>TEL:0769-85181660 85181770 |                 |                        |