
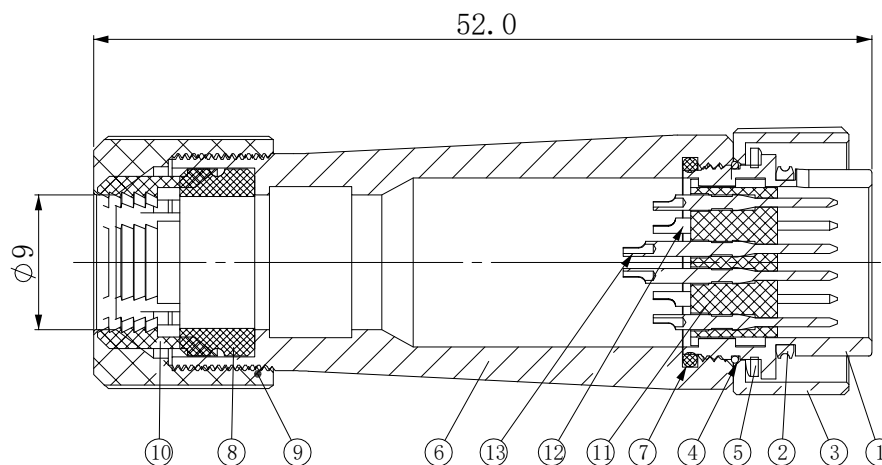
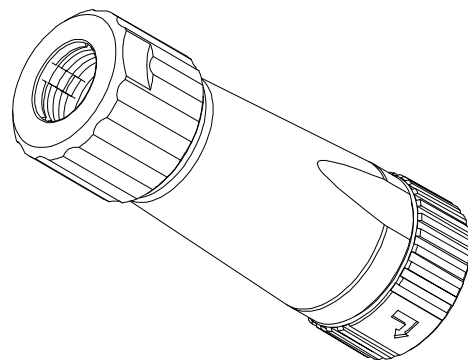
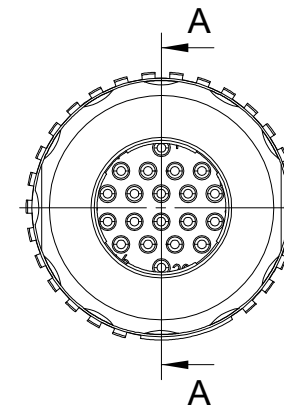
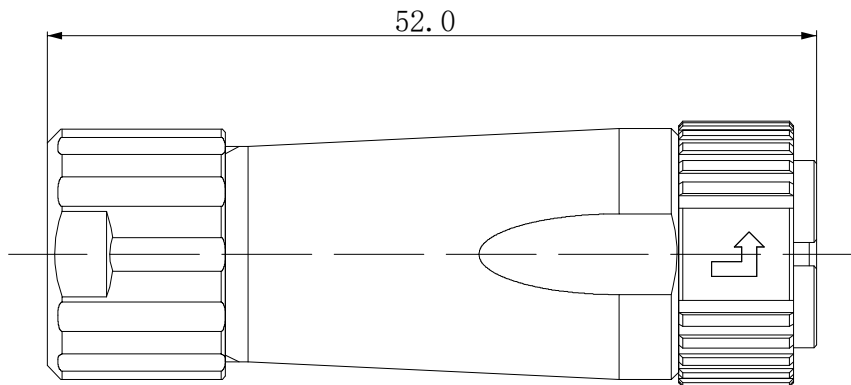


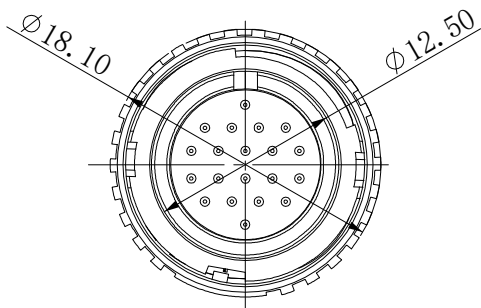

Section: A-A

Current rating: 2 AMP.
Operating voltage: 30V
Contact resistance: 15mΩ/Max.
Durability: 1000 cycles
Temperature range: -25℃ to +85℃
ROHS compliant

13	Terminal	Copper	Plating: Au
12	Terminal	Copper	Plating: Au
11	Housing	PPS	Color: balck
10	Cable clip	PSU	
9	Tail nut	PA66	
8	waterproof pad	Rubber	
7	Sealing ring	Rubber	
6	Cable gland	Zinc alloy	Plating: Ni
5	Elastic flake	Copper	
4	Retaining ring	Stainless steel	
3	Connection sleeve	Zinc alloy	Plating: Ni
2	Sealing ring	Rubber	
1	Hood	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remaks

				QUALITY SYMBOLS	Tolerance		NAME: LF13WBP-20P male solder zinc alloy hood assembly			PART NO. B10-0LF13WBP-20P	
A		2024/06/27	Remove the waterproof rating comment	Jack Chen	CRITICAL MAJOR	x. ±0.60	REV: B	UNIT: mm	DRW BY	CHK BY	APP BY
		2024/04/13	First edition release	Jack Chen		.x ±0.40	SCALE: N:1	DATE: 2024/04/13	Huangmei	Jack Chen	DRAWING NO. B10-115
						.xx ±0.25					
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C		lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com				
							TEL:0769-85181660 85181770				