

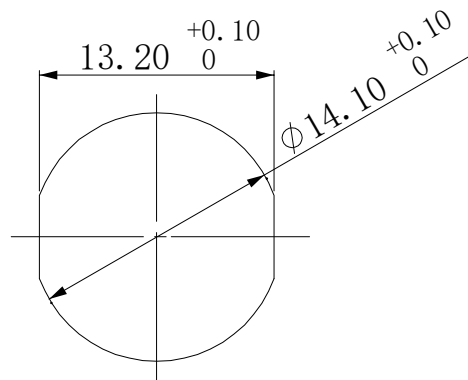
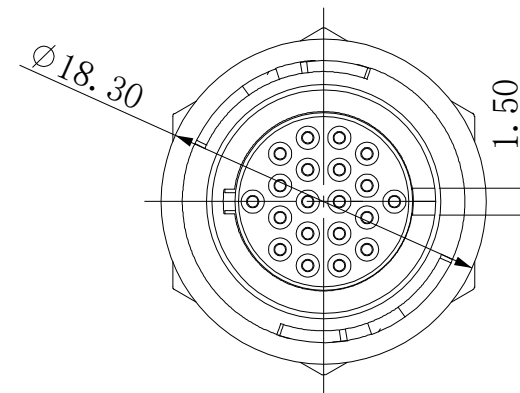
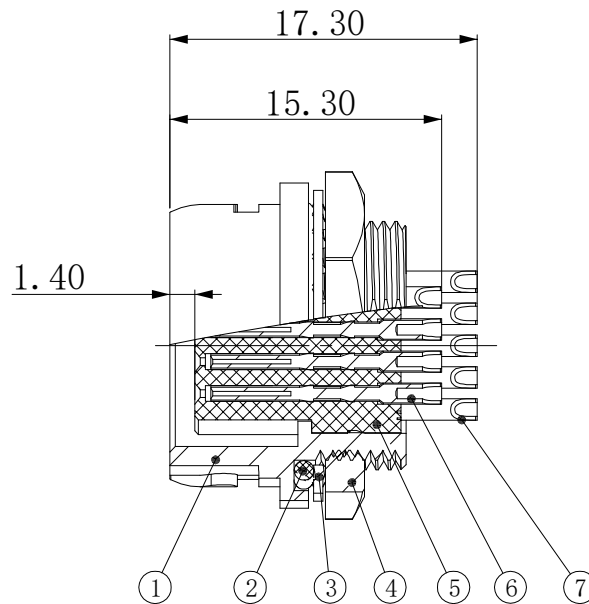


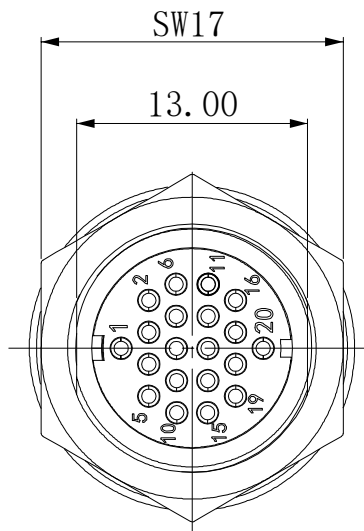

Panel size

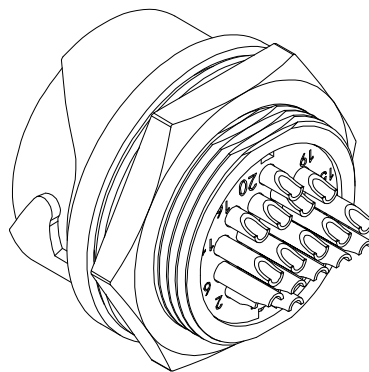

Current rating: 2 AMP.
Operating voltage: 30V
Contact resistance: 15mΩ/Max.
Durability: 1000 cycles
Temperature range: -25℃ to +85℃
ROHS compliant

7	Terminal	Copper	Plating: Au
6	Terminal	Copper	Plating: Au
5	Housing	thermoplastic	Color: black
4	Nut	Copper	Plating: Ni
3	Gasket	Stainless steel	
2	O-ring	Rubber	
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remarks

				QUALITY SYMBOLS	Tolerance	NAME:	LF13WBR-20S female solder rear lock panel				PART NO.	B10-OLF13WBR-20S		
A	△	2024/06/27	Remove the waterproof rating comment	Jack Chen	x. ±0.60 .x ±0.40 .xx ±0.25 	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B10-114	
	△	2024/04/13	First edition release	Jack Chen		SCALE:	N:1	DATE:	2024/04/13	Huangmei	Jack Chen			
	SIDE	DATE	DESCRIPTION	APPROVER		lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com				
	8	7	6	5		TEL:0769-85181660 85181770								