
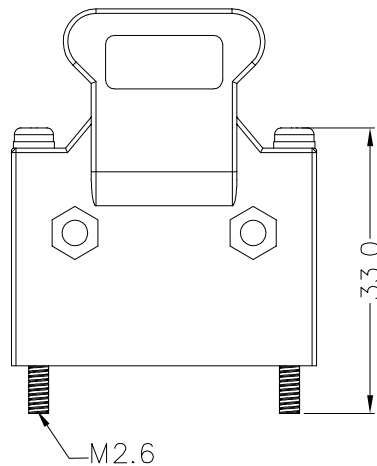
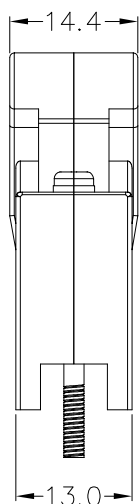
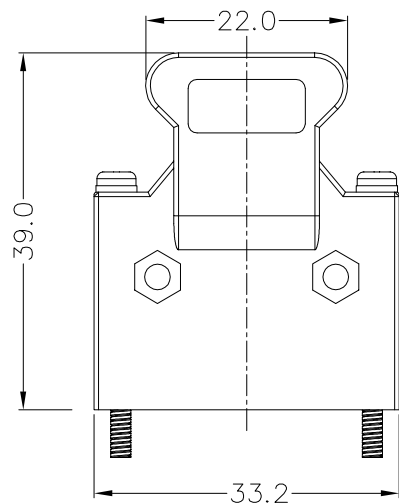








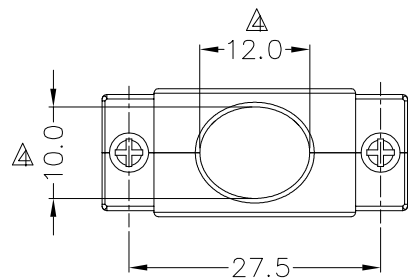

Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +105℃
ROHS compliant
Part No.:

B01-020311X4-01

Solder area:

3: G/F

C: Sn

10	Screw	Steel	Plating: Ni, M2.0
9	Screw	Steel	Plating: Ni
8	Nut	Steel	Plating: Ni
7	Hood	PBT+30%GF	Color: black
6	Screw	Steel	Plating: Ni, L=33.0mm
5	Clamp	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remarks

△	2022/07/13	Added the size of the cable clamp	Shuo Cao
△	2021/11/24	Added the size of the outlet hole	Shuo Cao
△	2009/06/04	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	SM(SCSI) 20pin male solder assembly plastic hood with screw 33.0mm				PART NO.	B01-020311X4-01		
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2009/06/04	Huangmei	Shuo Cao		B01-002	
Lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com				
				TEL:0769-85181660 85181770				
3	2	1						