


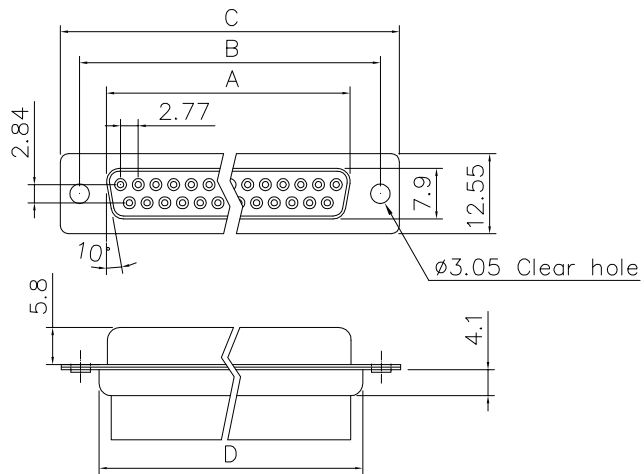


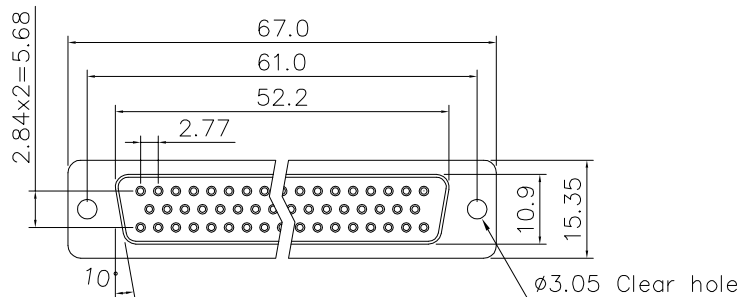

9,15,25,37pin



50Pin



Pin no.	A	B	C±0.38	D
09	16.33	24.99	30.81	19.2
15	24.66	33.32	39.14	27.7
25	38.38	47.04	53.04	41.1
37	54.84	63.50	69.32	57.3

Current rating: 3 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B05-0XX2X100-02

No.of contact:

09: 9pos
15: 15pos
25: 25pos
37: 37pos
50: 50pos

Housing color:

1: Black
5: White
6: Blue

3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Housing	PBT+30%GF	Color: see part no.
Item	Desc.	Material	Remaks

△	2023/04/24	Add ROHS comment, Change electrical performance parameters	Jack Chen
△	2016/07/22	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
		.xx	±0.25
▽:	▽:		
ZERO DEFECT	S.P.C		

NAME:	D-SUB crimp female conn.			PART NO.	B05-0XX2X100-02		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2016/07/22	Huangmei	Jack Chen		B05-111
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com			
				TEL:0769-85181660 85181770			