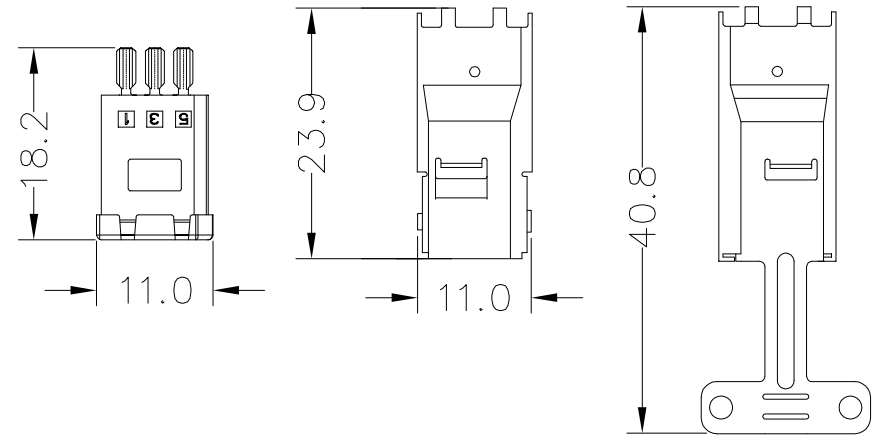
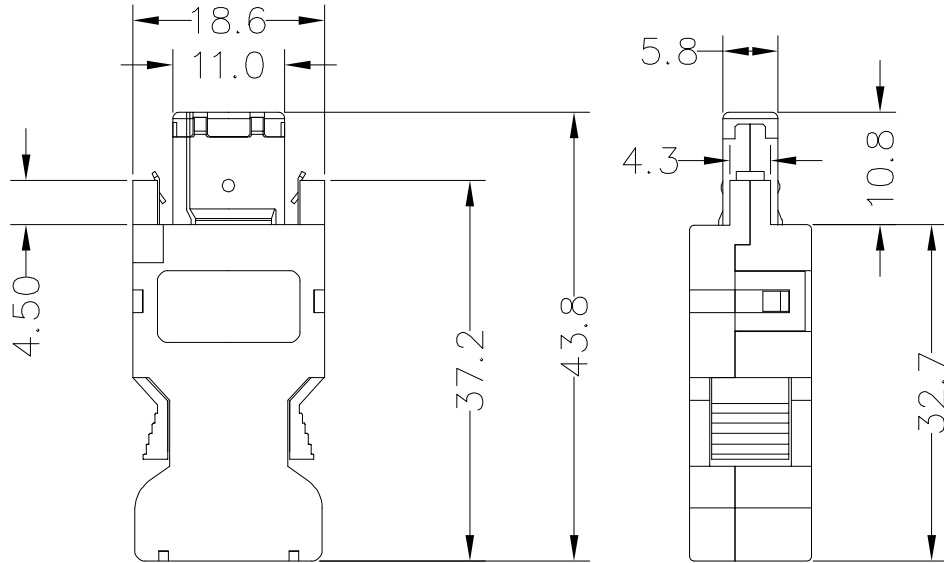



Current rating: 1A
Contact resistance: 35mΩ max.
Withstanding voltage: 500V AC
Insulation resistance: 500mΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

5	Latch	SUS 304	
4	Hood	PC+ABS	Color: gray
3	Housing	LCP+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

△			
△	2022/07/04	Add ROHS comment	Jack Chen
△	2021/04/23	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	SM(1394) 6pin male solder conn.				PART NO.	B01-006321A1-02		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2021/04/23	Shuo Cao	Jack Chen		B01-019	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			