




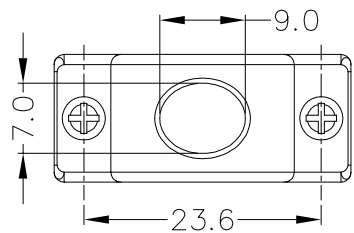
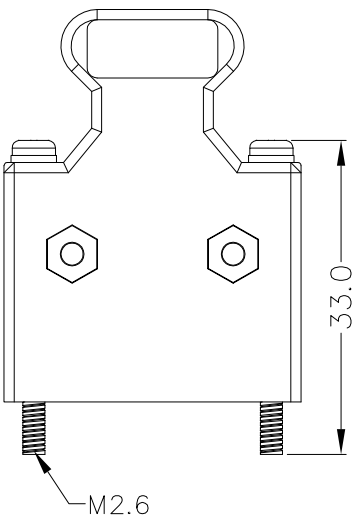
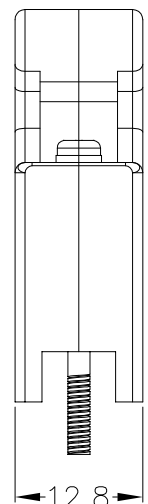


Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +105℃
ROHS compliant
Part No.:

Solder area: B01-014311X4-01
3: G/F
C: Sn

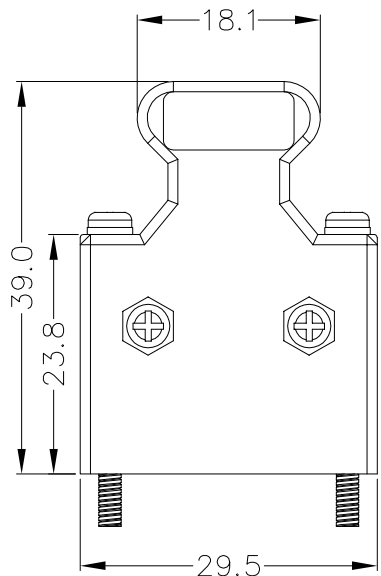

10	Screw	Steel	Plating: Ni, M2.0
9	Screw	Steel	Plating: Ni
8	Nut	Steel	Plating: Ni
7	Hood	ABS+PC	Color: black
6	Screw	Steel	Plating: Ni, L=33.0mm
5	Clamp	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remarks

△	2022/07/11	Added the size of the cable clamp	Shuo Cao	QUALITY SYMBOLS	Tolerance	NAME:	SM(SCSI) 14pin male solder assembly plastic hood with screw 33.0mm			PART NO.	B01-014311X4-01		
△	2020/06/26	Open a new mold and adjust the dimensional	Shuo Cao	□: ☒:	x. ±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2009/06/04	First edition release	King Zhou	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2009/06/04	Huangmei	Shuo Cao		B01-001
				▽: ▽:	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C									