
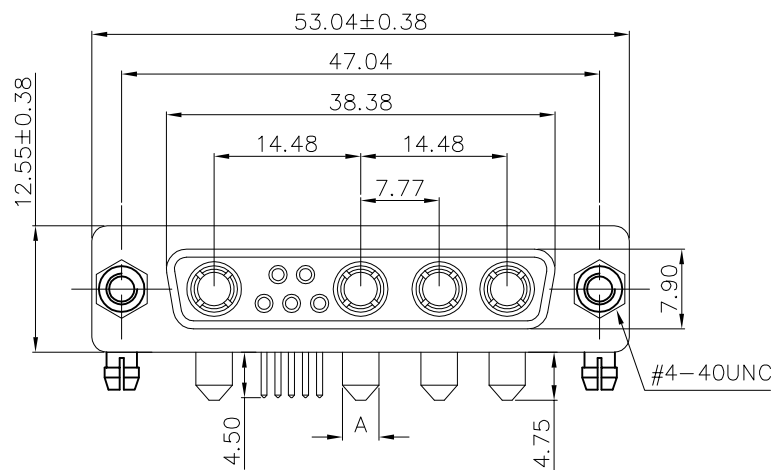
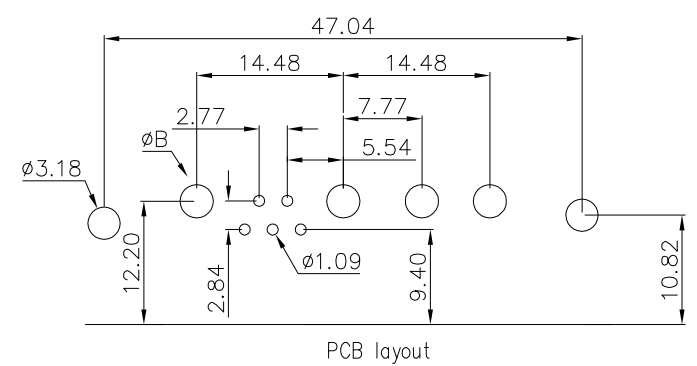


High power contact current rating:
10,20 or 40AMPS
Signal contact current rating: 5AMPS
High power contact resistance:
2.7 milliohms max.
Dielectric withstanding voltage:
1000V AC for 1 minute
Insulation resistance:5000mΩ min.
Temperature range:-55℃ to +125℃
ROHS compliant

Part no:
B08-9W46X1XD-X1
Housing color:
1:black
3:green
5:white
Terminal plated:
4:Au 2u"
5:Au 1u"
Current rating:
A:10A,Dim.A ø1.7 Dim.B ø2.2
B:20A,Dim.A ø2.8 Dim.B ø3.3
C:30A,Dim.A ø3.2 Dim.B ø3.7
D:40A,Dim.A ø3.7 Dim.B ø4.2

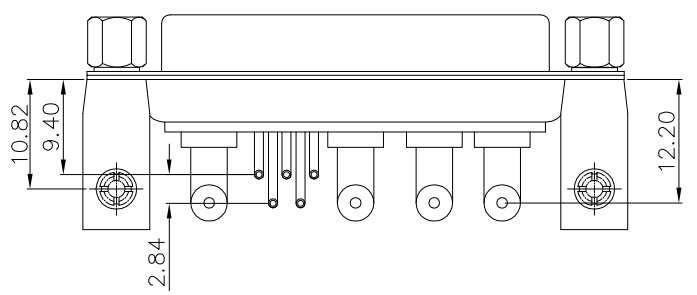

7	Prop up	Steel	Plating: Ni
6	Screws	Steel	Plating: Ni
5	Housing	PBT+30%GF	Color: see part no.
4	Riveted insert	Brass	Plating: Ni
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Brass	Plating: see part no.
Item	Desc.	Material	Remarks

	2020/12/19	Change tolerance	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR : : ZERO DEFECTS.P.C	Tolerance x. ±0.60 .x ±0.40 .xx ±0.25 	NAME: 9W4 female right angle,riveted insert,lock screw					PART NO.		B08-9W46X1XD-X1	
	2019/07/18	Improved plating specifications for terminal blocks	Jack Chen			REV: D	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.			
	2017/05/08	First edition release	Jing Li			SCALE: N:1	DATE: 2017/05/08	Huangmei	Jack Chen		B08-042			
SIDE	DATE	DESCRIPTION	APPROVER			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL: 0769-85181660 85181770								