



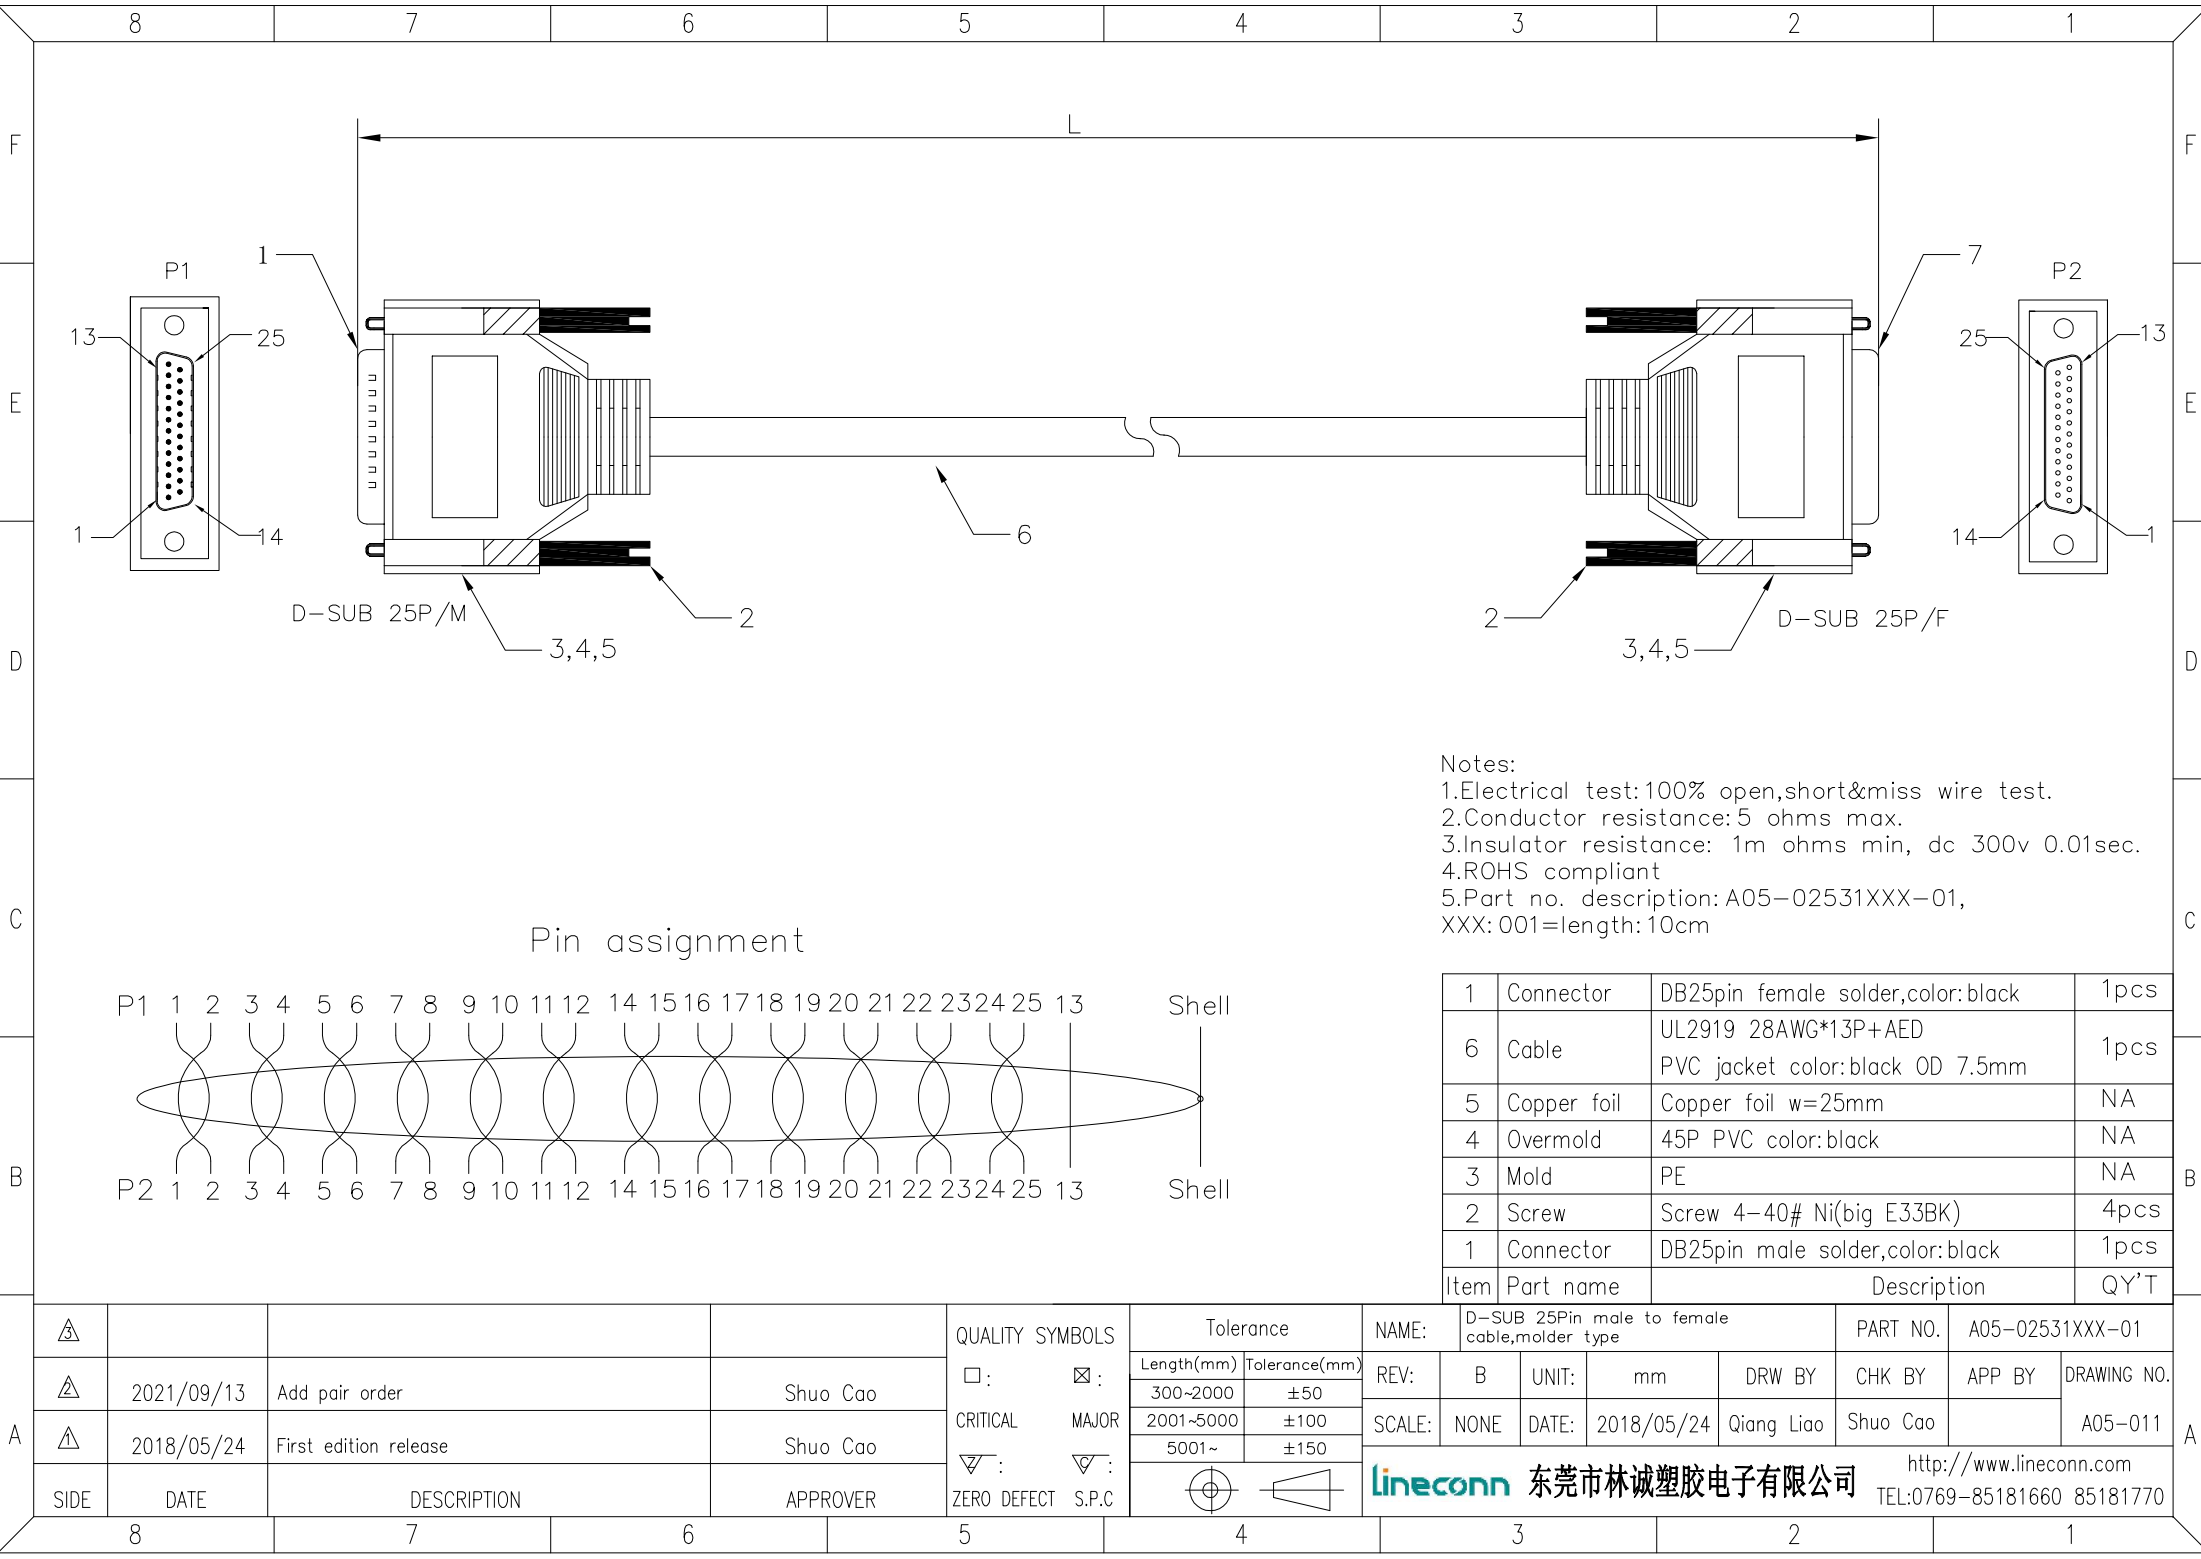

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part no. description: A05-02531XXX-01,
XXX:001=length:10cm

Pin assignment

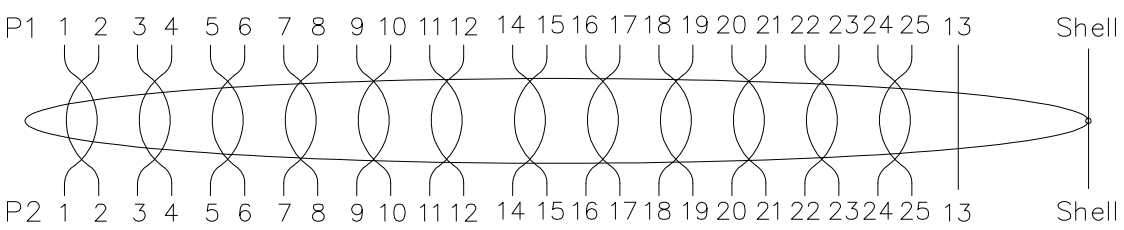

1	Connector	DB25pin female solder,color:black	1pcs
6	Cable	UL2919 28AWG*13P+AED PVC jacket color:black OD 7.5mm	1pcs
5	Copper foil	Copper foil w=25mm	NA
4	Overmold	45P PVC color:black	NA
3	Mold	PE	NA
2	Screw	Screw 4-40# Ni(big E33BK)	4pcs
1	Connector	DB25pin male solder,color:black	1pcs
Item	Part name	Description	QY'T

A					QUALITY SYMBOLS	Tolerance		NAME: D-SUB 25Pin male to female cable,molder type				PART NO.		A05-02531XXX-01		
		2021/09/13	Add pair order	Shuo Cao	☐ : ☒ :	Length(mm)	Tolerance(mm)	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
		2018/05/24	First edition release	Shuo Cao	CRITICAL MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2018/05/24	Qiang Liao	Shuo Cao		A05-011	
					 :  :	2001~5000	±100	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com								
					 :  :	5001~	±150									TEL:0769-85181660 85181770
SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT	S.P.C										
8		7		6		5		4		3		2		1		