


Notes:  
 1.Electrical test:100% open,short&miss wire test.  
 2.Conductor resistance:5 ohms max.  
 3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.  
 4.ROHS compliant  
 5.Part no. description:A05-02511XXX-01,  
 XXX: 001=length:10cm

Pin assignment

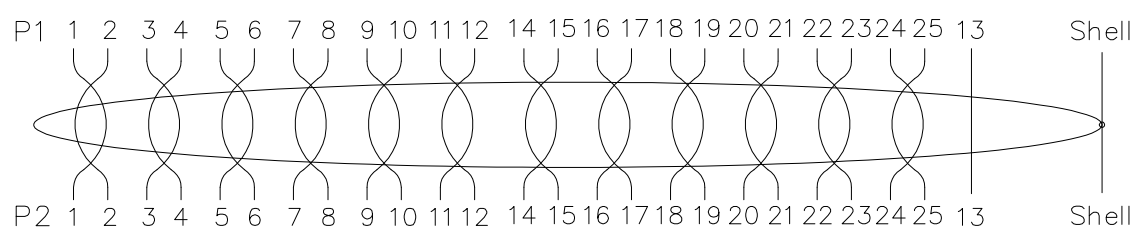

6	Cable	UL2919 28AWG*13P+AED PVC jacket color:black OD 7.8mm	1pcs
5	Copper foil	Copper foil w=25mm	NA
4	Overmold	45P PVC color:black	NA
3	Mold	PE	NA
2	Screw	Screw 4-40# Ni(big E33BK)	4pcs
1	Connector	DB25pin male solder,color:black	2pcs
Item	Part name	Description	QY'T

A	△			QUALITY SYMBOLS	Tolerance		NAME:	D-SUB 25Pin male to male cable,molder type			PART NO.	A05-02511XXX-01		
	△			□:    ☒:	Length(mm)	Tolerance(mm)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2018/05/24	First edition release	CRITICAL MAJOR	2001-5000	±100	SCALE:	NONE	DATE:	2018/05/24	Qing Liao	Shuo Cao		A05-012
	△			▽:    ▽:	5001~	±150	SCALE:		DATE:					
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	东莞市林诚塑胶电子有限公司			<a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770				
	8	7	6	5	4	3	2	1						