



RoHS

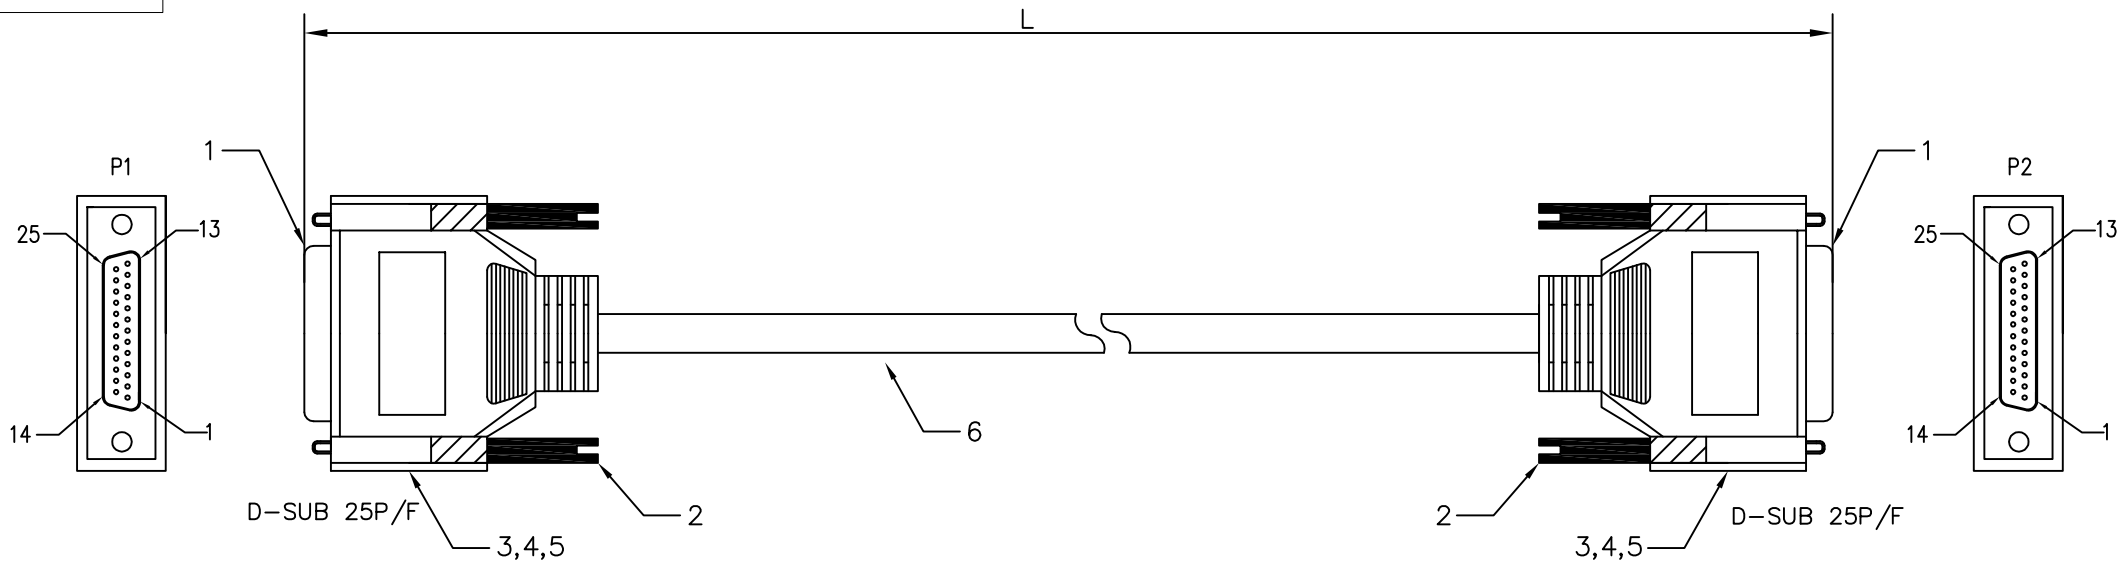

Notes:

- 1. Electrical test: 100% open, short & miss wire test.
- 2. Conductor resistance: 5 ohms max.
- 3. Insulator resistance: 1m ohms min, dc 300v 0.01sec.
- 4. ROHS compliant
- 5. Part no. description: A05-02521XXX-01, XXX: 001=length: 10cm

Pin assignment

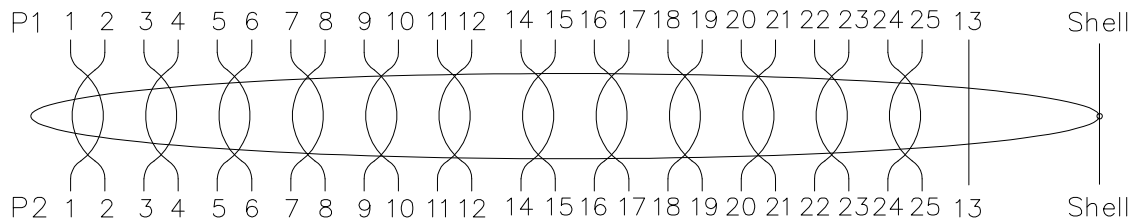

6	Cable	UL2919 28AWG*13P+AED PVC jacket color:black OD 7.5mm	1pcs
5	Copper foil	Copper foil w=25mm	NA
4	Overmold	45P PVC color:black	NA
3	Mold	PE	NA
2	Screw	Screw 4-40# Ni(big E33BK)	4pcs
1	Connector	DB25pin female solder,color:black	2pcs
Item	Part name	Description	QY'T

A	△			QUALITY SYMBOLS	Tolerance		NAME: D-SUB 25Pin female to female cable,molder type			PART NO.	A05-02521XXX-01			
	△	2021/09/13	Add pair order	Shuo Cao	□: <input type="checkbox"/>	☒: <input checked="" type="checkbox"/>	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2018/05/24	First edition release	Shuo Cao	CRITICAL	MAJOR	SCALE:	NONE	DATE:	2018/05/24	Qiang Liao	Shuo Cao		A05-010
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com		TEL:0769-85181660 85181770			