


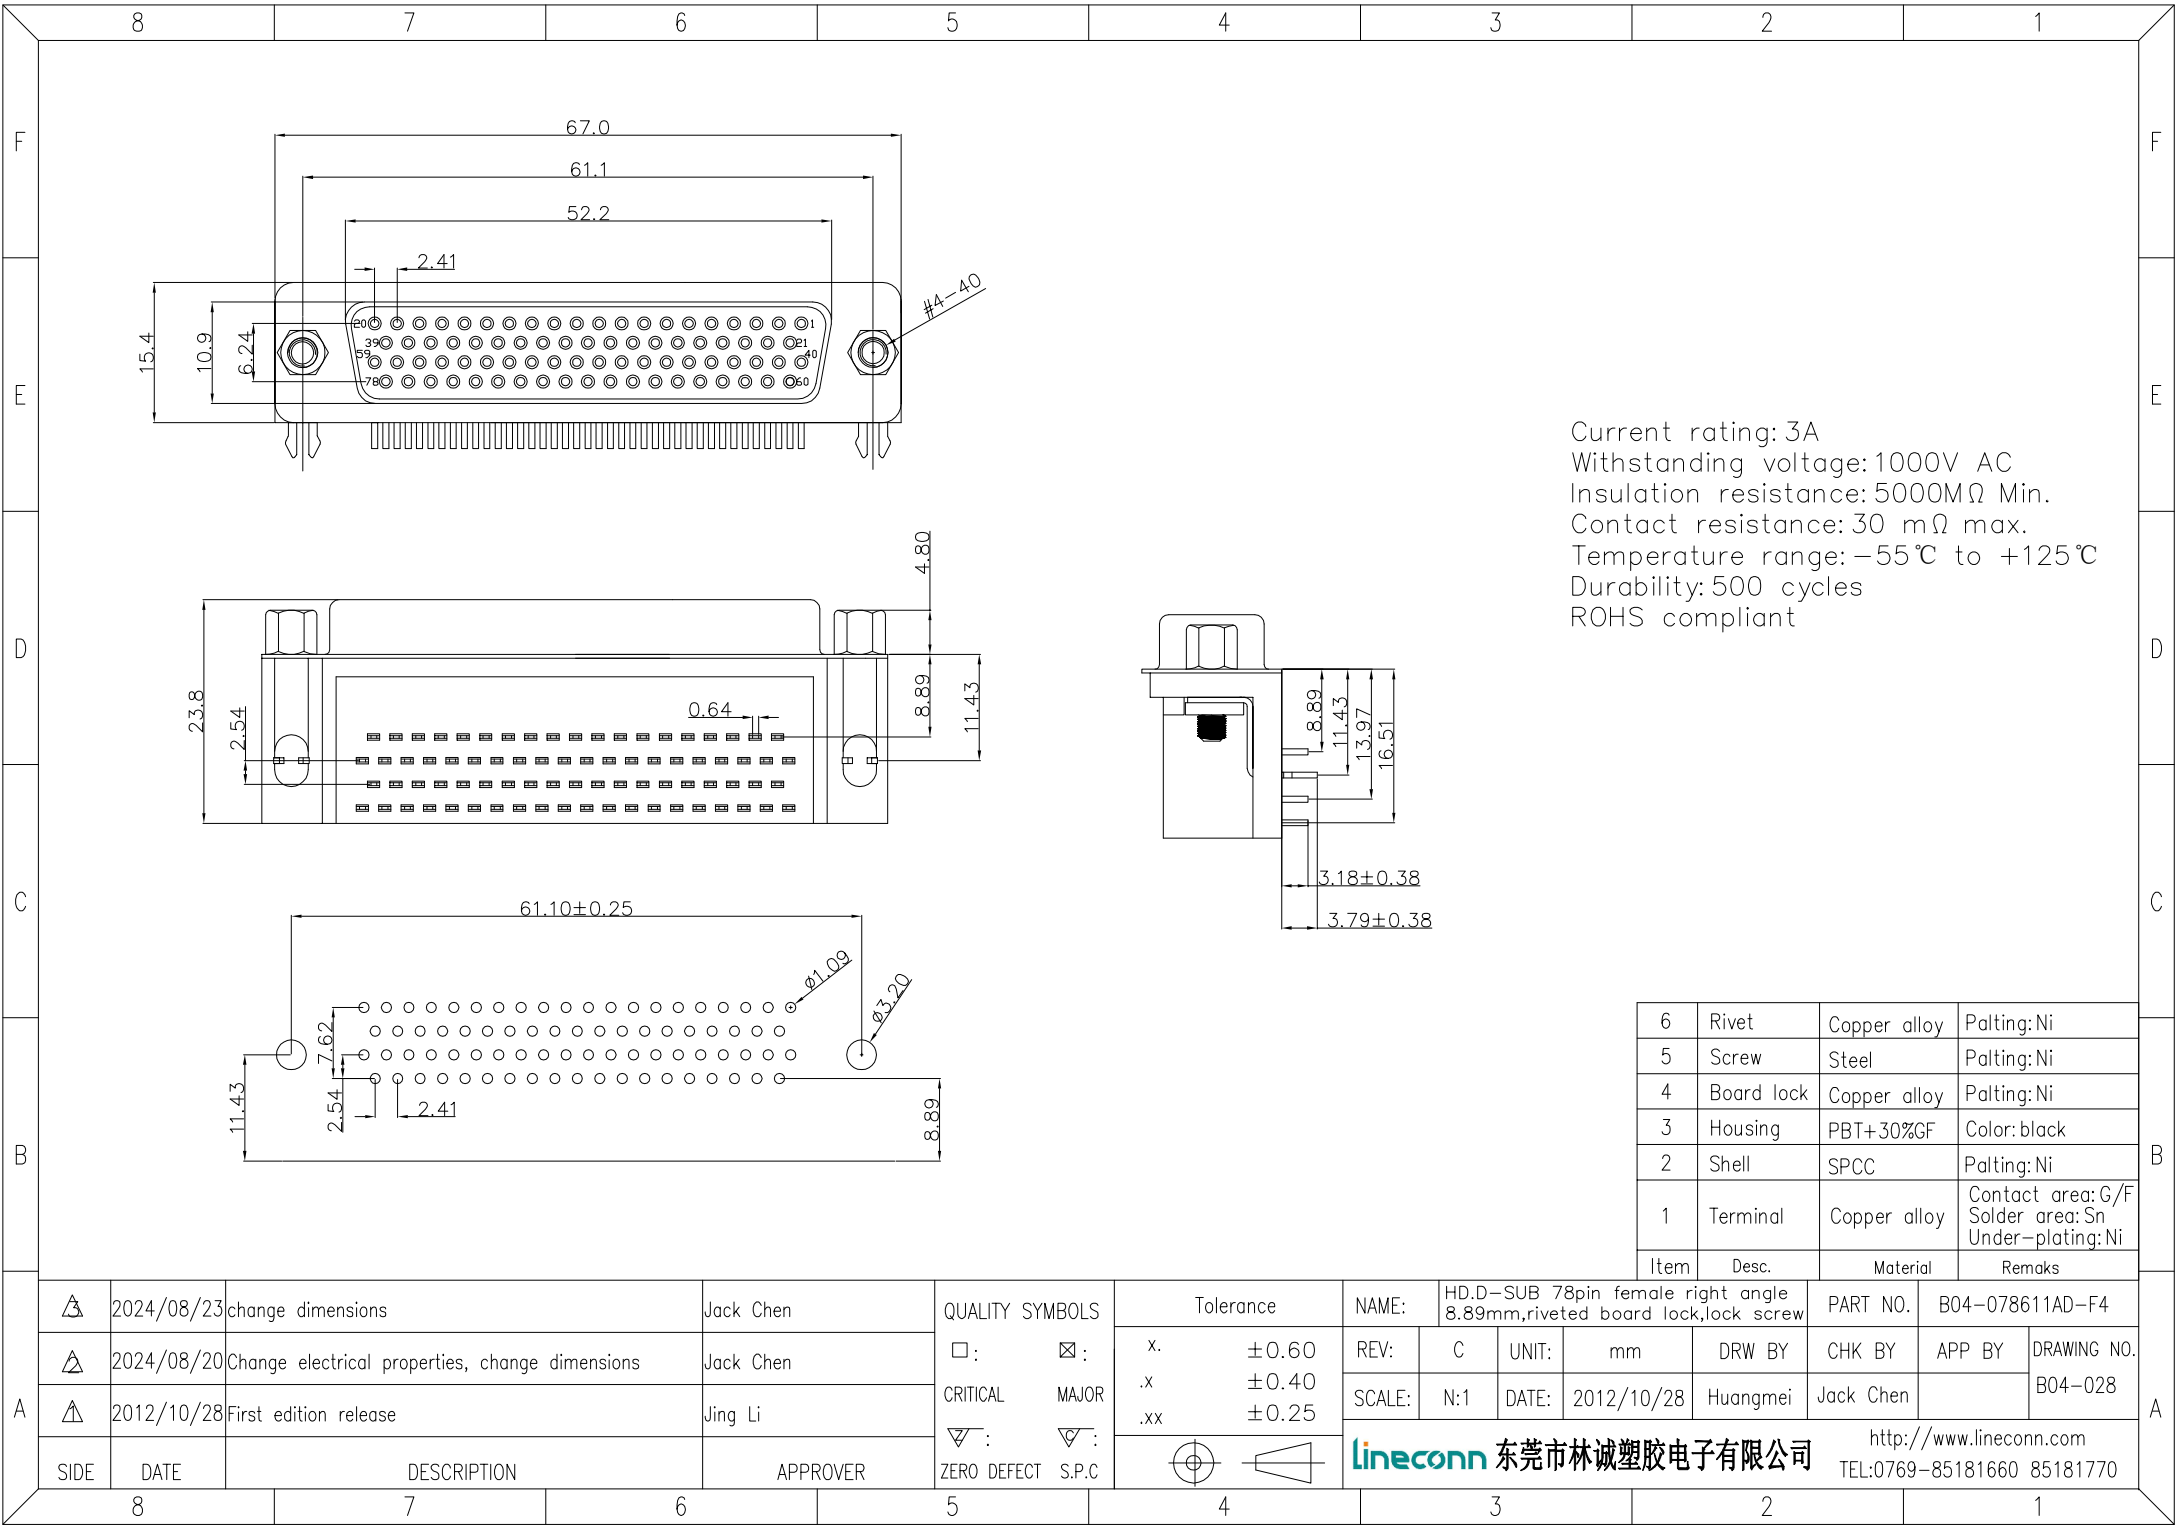

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Contact resistance: 30 mΩ max.
Temperature range: -55℃ to +125℃
Durability: 500 cycles
ROHS compliant

6	Rivet	Copper alloy	Palting: Ni
5	Screw	Steel	Palting: Ni
4	Board lock	Copper alloy	Palting: Ni
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

A		2024/08/23	change dimensions	Jack Chen	QUALITY SYMBOLS □: ✖: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance x. ±0.60 .x ±0.40 .xx ±0.25	NAME: HD.D-SUB 78pin female right angle 8.89mm,riveted board lock,lock screw		PART NO.		B04-078611AD-F4				
		2024/08/20	Change electrical properties, change dimensions	Jack Chen			REV: C	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO. B04-028			
		2012/10/28	First edition release	Jing Li			SCALE: N:1	DATE: 2012/10/28	Huangmei	Jack Chen					
	SIDE	DATE	DESCRIPTION		APPROVER	 lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
	8		7		6		5		4		3		2		1