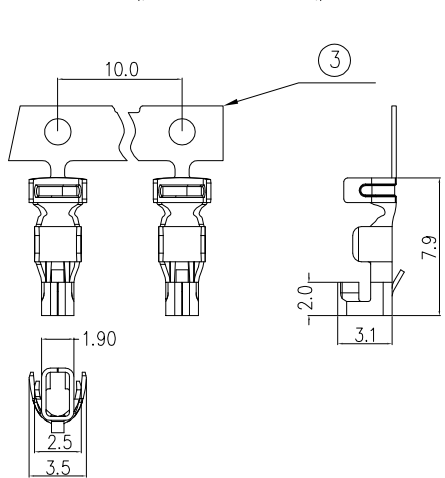
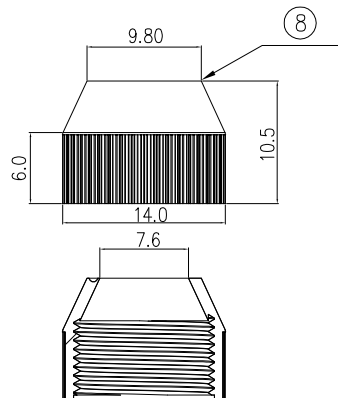
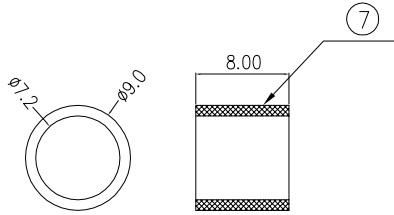
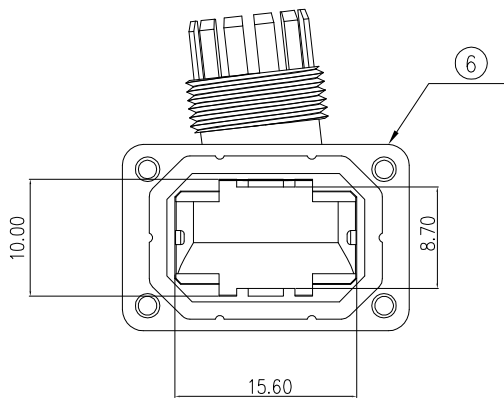
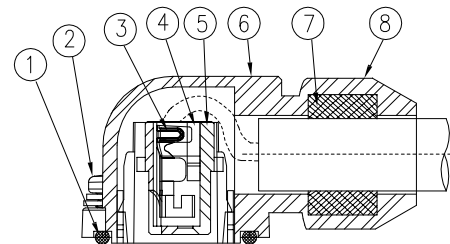







Voltage current rating: 5 AMP.
Dielectric withstanding voltage: 500V AC
Contact resistance: 30 mΩ Max.
Insulation resistance: 500MΩ Min.
Temperature range: -20℃ to +85℃
ROHS compliant
Waterproof rating: IP67

8	Gland nut	Synthetic rubber	Color:black	1pcs
7	Bushing	Synthetic rubber	Color:black	1pcs
6	Hood	Synthetic rubber	Color:black	1pcs
5	Socket insulator	Synthetic rubber	Color:black	1pcs
4	Card	Synthetic rubber	Color:blue	1pcs
3	Terminal	Copper alloy	Plating: G/F	4pcs
2	Screw	Steel	Plating: Ni	4pcs
1	Gasket	Synthetic rubber	Color:black	1pcs
Item	Desc.	Material	Remarks	Part remarks

△			
△	2021/03/27	Change part number	Shuo Cao
△	2019/10/09	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS	Tolerance
□: ☒:	x. ±0.60
CRITICAL MAJOR	.x ±0.40
▽: ▽:	.xx ±0.25
ZERO DEFECT S.P.C	

NAME:		JN4FT04SJ1-R,J3/J4 4pin waterproof connector for Mitsubishi servo motor			PART NO.		B01-00411154-01	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2019/10/09	Huangmei	Shuo Cao		B01-028	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com			
					TEL:0769-85181660 85181770			