

F

E

D

C

B

A

F






E

D

C





B

A

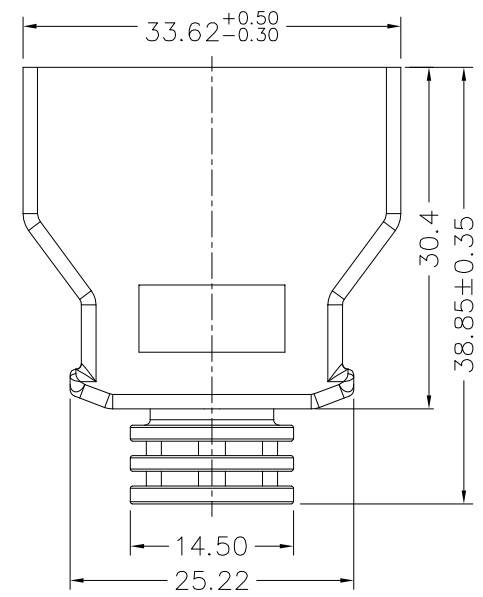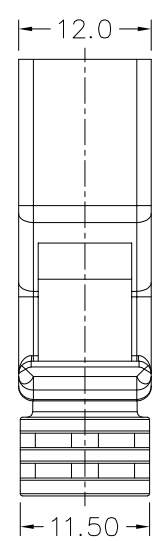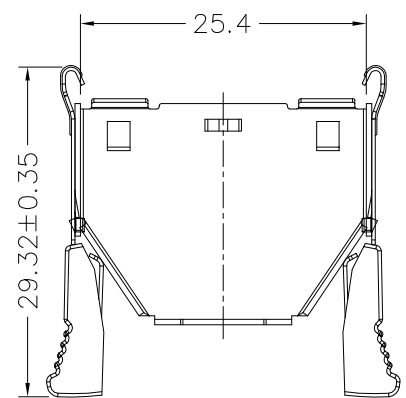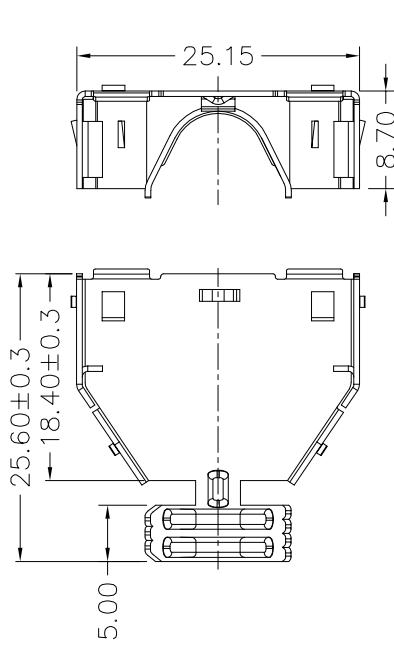

Current rating:1A
Withstanding voltage:500V AC
Contact resistance : 35mΩ max.
Insulation resistance:500MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant
Part No.:

B03-0263X1X2-X1
Housing color:
1: Black
C: Beige
Terminal plating:
A: G/F
E: Au 5u"
H: Au 15u"
Hood OD:
7: 7.0mm
8: 8.0mm
B: 8.5mm Δ
9: 9.0mm

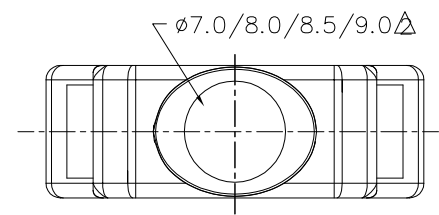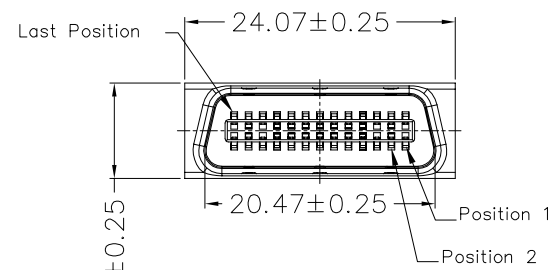







6	Spring latch	SUS	
5	Outside shell	SPCC	Plating: Ni
4	Hood&wrench	ABS+G.F.30% (UL 94V-0)	Color: see part on.
3	Housing&cover	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: see part on Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

Δ			
Δ	2019/12/17	Increase in hood OD specifications	King Zhou
Δ	2009/04/02	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
⊕	⊖

NAME:	SCSI 26pin male solder assembly plastic hood, fish hooks type			PART NO.	B03-0263X1X2-X1		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2009/04/02	Jack Chen	King Zhou		B03-030
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			
3	2	1					

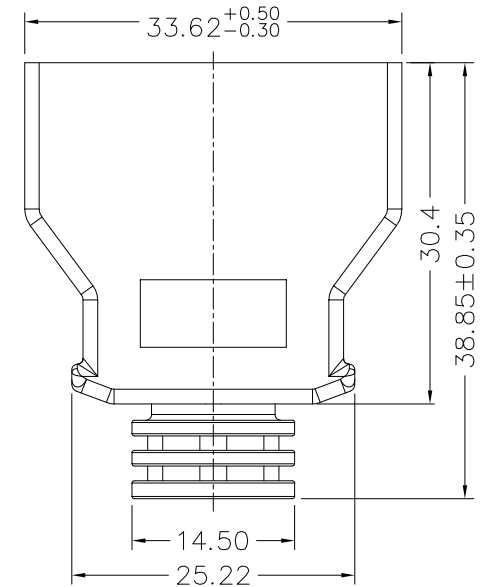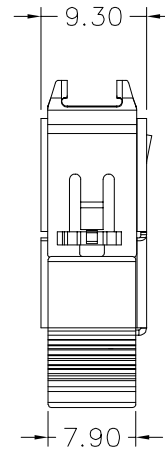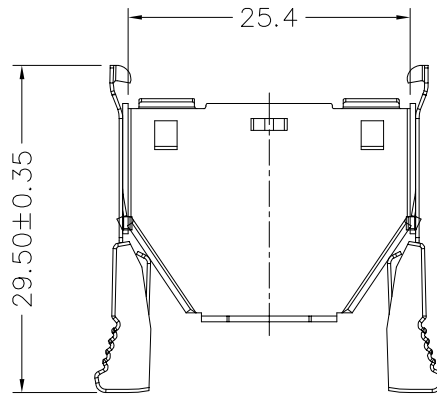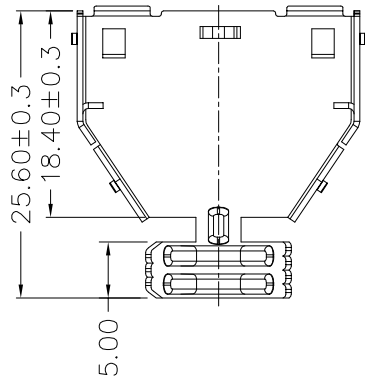

Current rating:1A
Withstanding voltage:500V AC
Contact resistance : 35mΩ max.
Insulation resistance:500MΩ Min.
Temperature range:-45℃ to +105℃
ROHS compliant
Part No.:

B03-0263X1X1-X1

Housing color:

1:Black

C:Beige

Terminal plating:

A:G/F

E:Au 5u"

H:Au 15u"





Hood OD:

7: 7.0mm

8: 8.0mm

B: 8.5mm Δ

9: 9.0mm

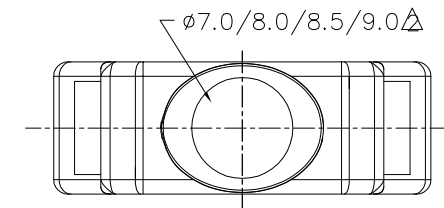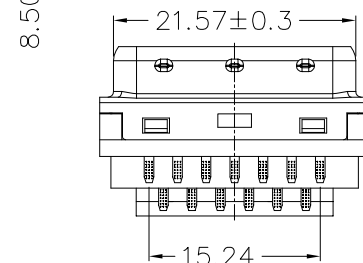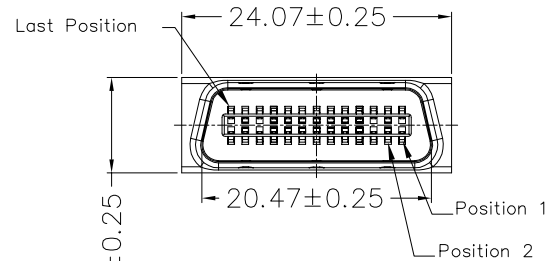

6	Spring latch	SUS	
5	Outside sheel	SPCC	Plating:Ni
4	Hood&wrench	ABS+G.F.30% (UL 94V-0)	Color:see part on.
3	Housing&cover	PBT+G.F.30% (UL 94V-0)	Color:black
2	Sheel	SPCC	Plating:Ni
1	Terminal	Copper alloy	Contact area:see part on Solder area:Sn Under-plating:Ni
Item	Desc.	Material	Remaks



SIDE

8

7

6

5

4

3

2

1

QUALITY SYMBOLS

☐ : ☒ :

CRITICAL MAJOR

☒ : ☒ :


ZERO DEFECT S.P.C

Tolerance

.x. ± 0.60

.x ± 0.40

.xx ± 0.25



NAME:

SCSI 26pin male solder assembly plastic hood,flag hooks type

REV:

B

SCALE:

N:1

UNIT:

mm

DATE:

2009/04/02

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770

PART NO.

B03-0263X1X1-X1

CHK BY

King Zhou

APP BY

King Zhou

DRAWING NO.

B03-109