

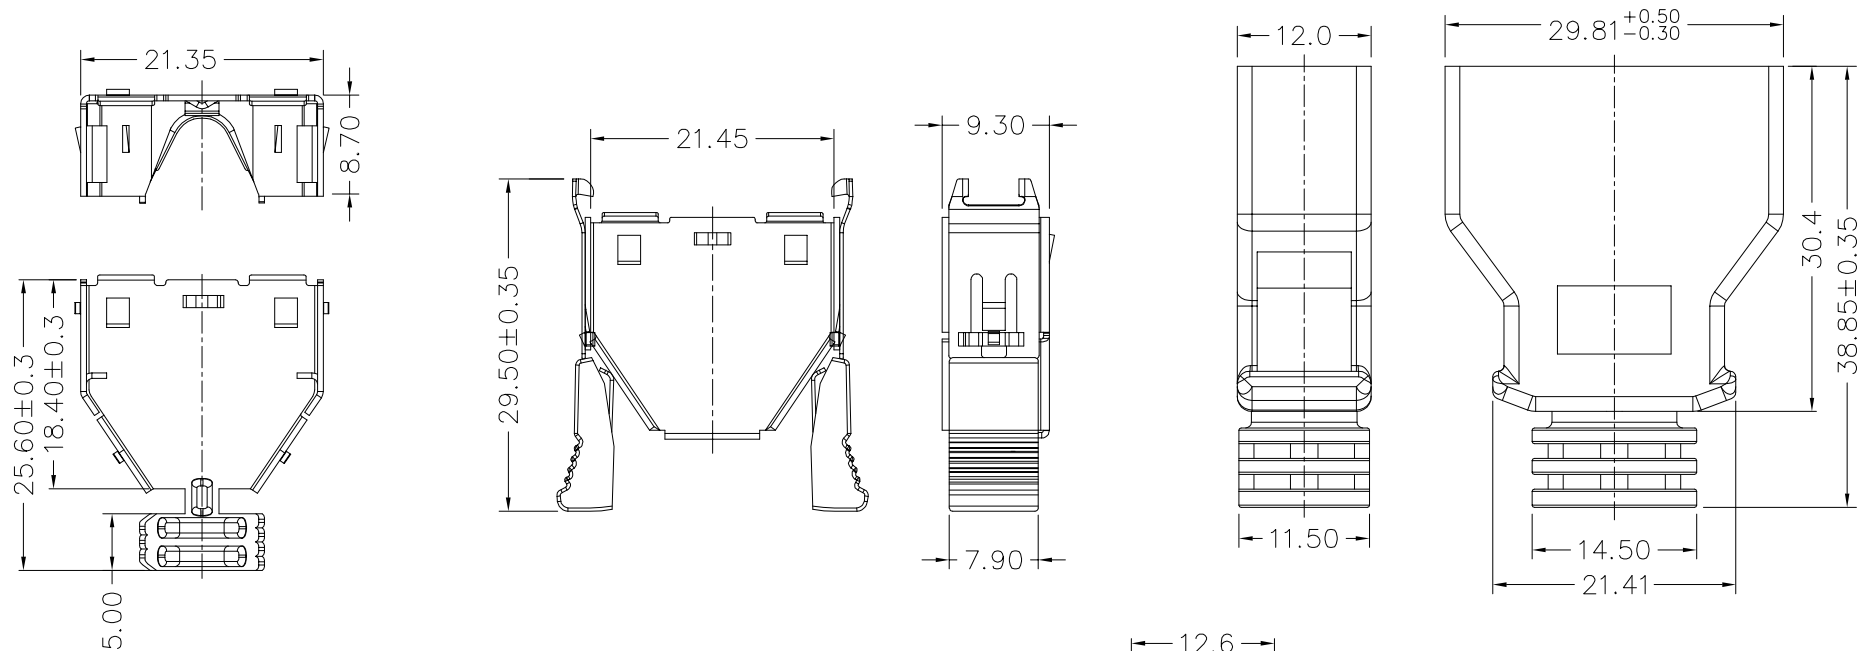


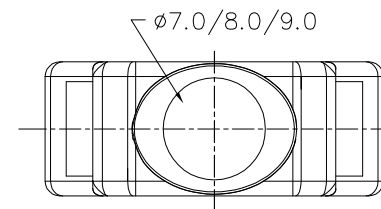

Current rating:1A
Withstanding voltage:500V AC
Contact resistance : 35mΩ max.
Insulation resistance:500MΩ Min.
Temperature range:-45℃ to +105℃
ROHS compliant
Part No.:

B03-0203X1X1-X1
Housing color:
1:Black
C:Beige
Terminal plating:
A:G/F
E:Au 5u"
H:Au 15u"
Hood OD:
7:7.0mm
8:8.0mm
9:9.0mm

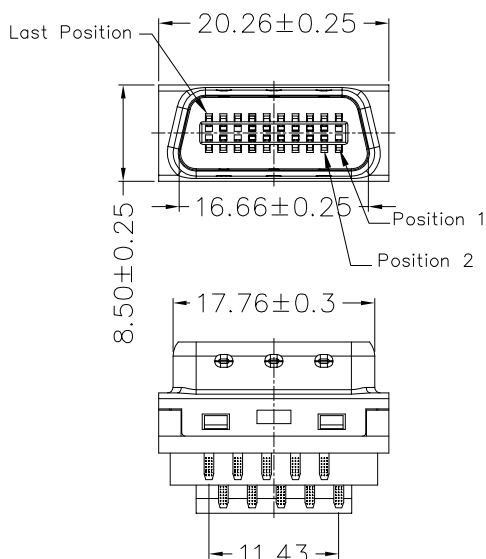

6	Spring latch	SUS	
5	Outside sheel	SPCC	Plating: Ni
4	Hood&wrench	ABS+G.F.30% (UL 94V-0)	Color: see part on.
3	Housing&cover	PBT+G.F.30% (UL 94V-0)	Color: black
2	Sheel	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: see part no. Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

△			
△	2009/07/23	Add terminal plating	King Zhou
△	2009/04/02	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		SCSI 20pin male solder assembly plastic hood,flag hooks type				PART NO.	B03-0203X1X1-X1	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2009/04/02	Dawn Hu	King Zhou		B03-035	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			

