
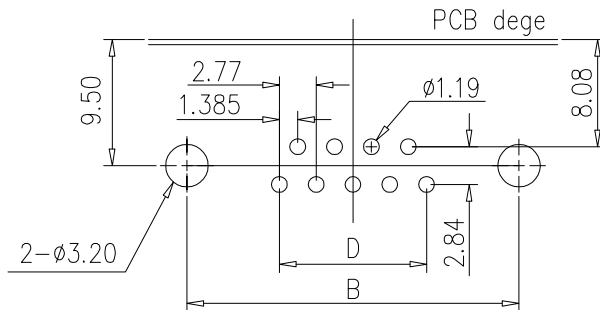
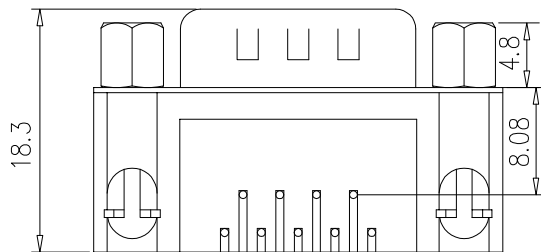
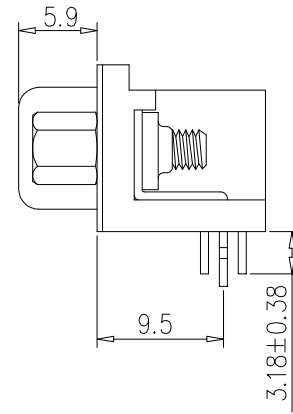


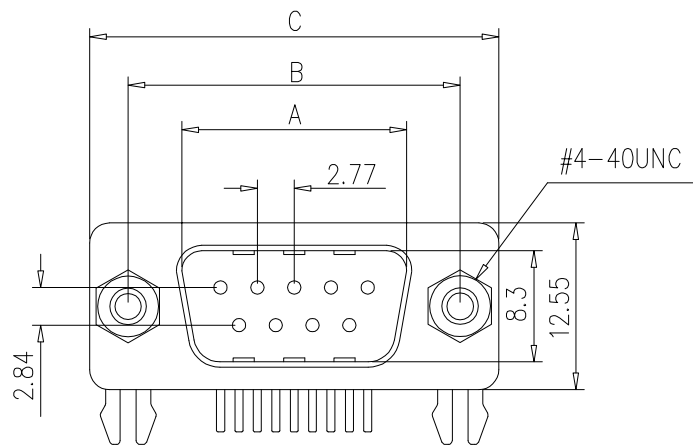

No.of Contact	A	B	C	D
09	16.9	25.0	30.8	11.1
15	25.2	33.3	39.1	19.4
25	39.0	47.0	53.0	33.2
37	54.4	63.5	69.3	49.9

Current rating: 3A.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ min.
Contact resistance: 35mΩ Max
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B05-0XX511AD-F4

No.of contact:

09: 9P
15: 15P
25: 25P
37: 37P

5	Screw	Steel	Palting: Ni
4	Board lock	Copper alloy	Palting: Ni
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

				QUALITY SYMBOLS	Tolerance	NAME:	D-SUB male right angle 8.08mm, riveting board lock, lock 4.8mm screw	PART NO.	B05-0XX511AD-F4
△	2020/04/16	Change part number	Shuo Cao	□: ☒:	x. ±0.60	REV:	B	UNIT:	mm
△	2011/03/07	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2011/03/07
				∇: ∇:	.xx ±0.25				
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C					
8		7	6	5	4	3	2	1	

Lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL: 0769-85181660 85181770