


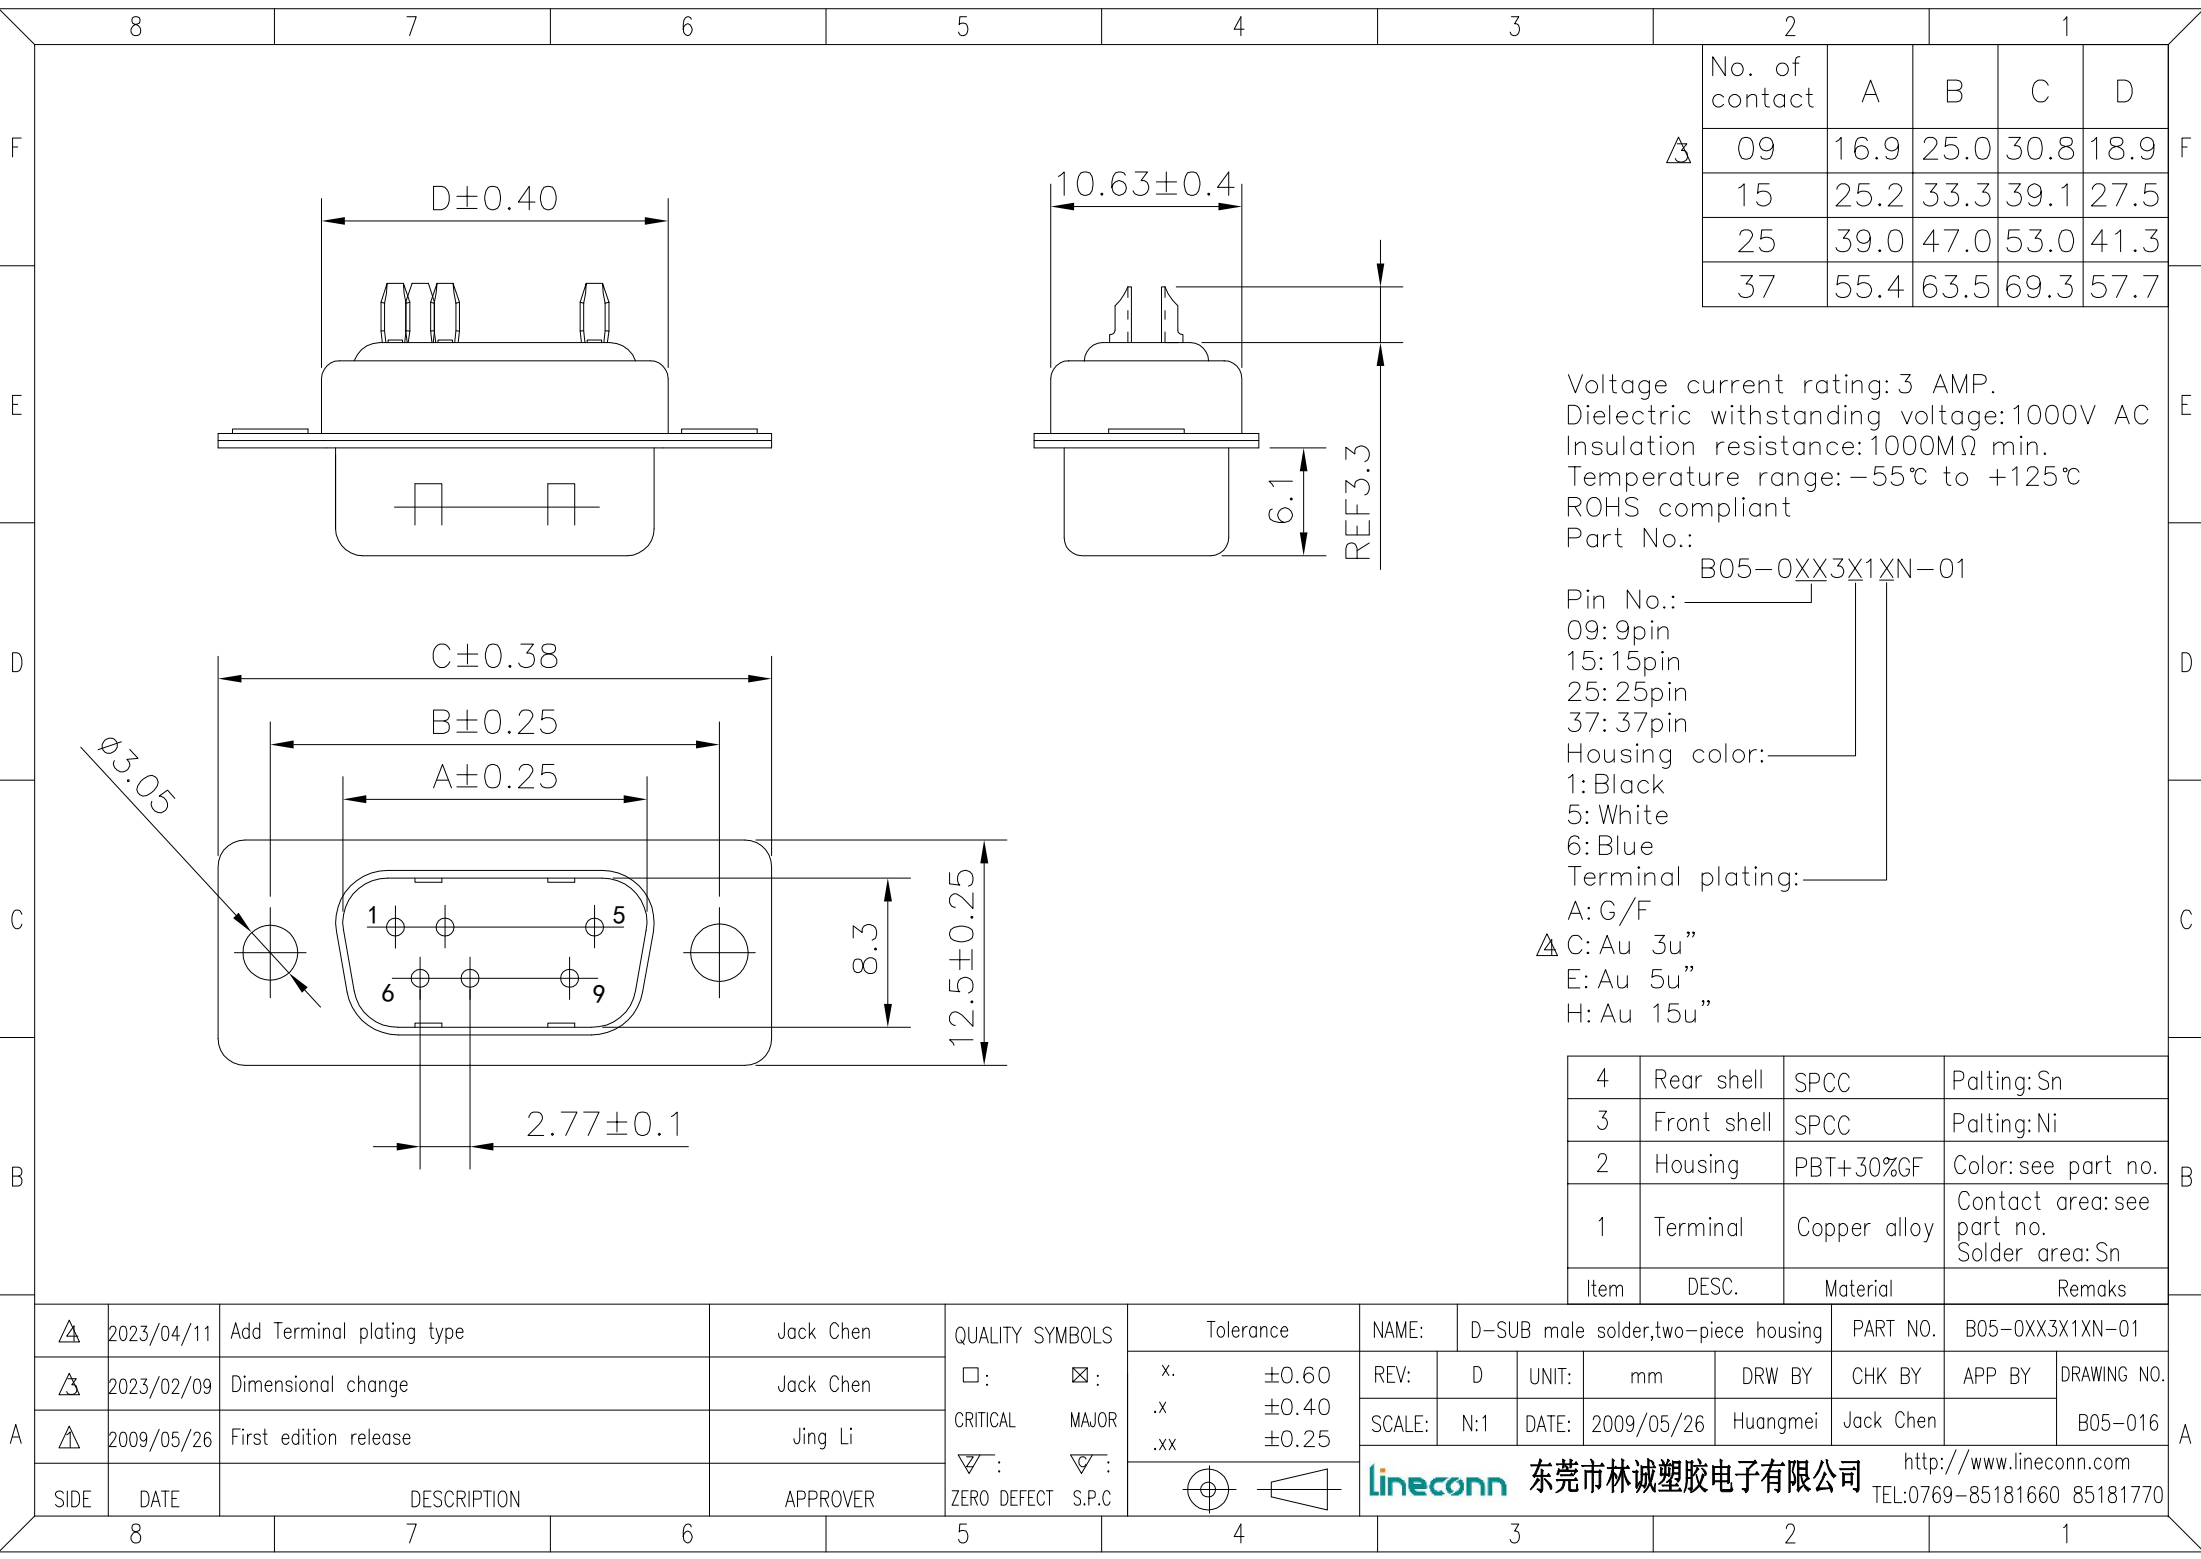

No. of contact	A	B	C	D
09	16.9	25.0	30.8	18.9
15	25.2	33.3	39.1	27.5
25	39.0	47.0	53.0	41.3
37	55.4	63.5	69.3	57.7

Voltage current rating: 3 AMP.
Dielectric withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B05-0XX3X1XN-01

Pin No.:
09: 9pin
15: 15pin
25: 25pin
37: 37pin
Housing color:
1: Black
5: White
6: Blue
Terminal plating:

A: G/F
C: Au 3u"
E: Au 5u"
H: Au 15u"

4	Rear shell	SPCC	Palting: Sn
3	Front shell	SPCC	Palting: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: see part no. Solder area: Sn
Item	DESC.	Material	Remaks

△	2023/04/11	Add Terminal plating type	Jack Chen
△	2023/02/09	Dimensional change	Jack Chen
△	2009/05/26	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	D-SUB male solder,two-piece housing				PART NO.	B05-0XX3X1XN-01	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2009/05/26	Huangmei	Jack Chen		B05-016
lineconn		东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770		