



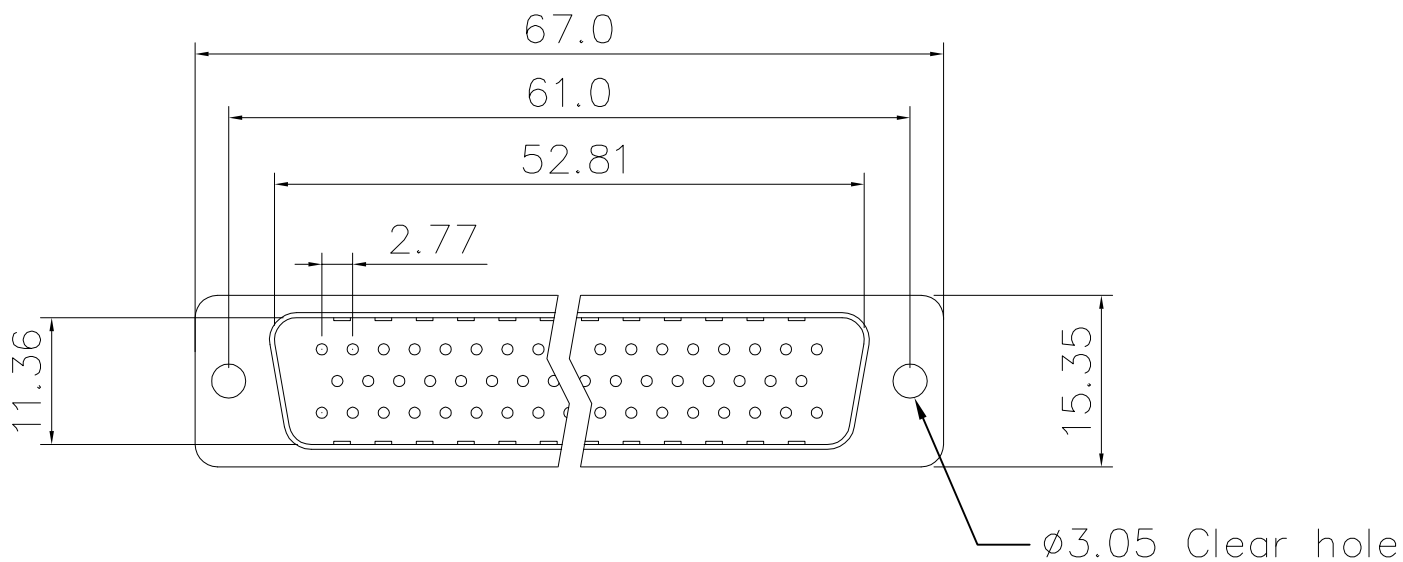


Current rating: 3 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B05-0503X1AN-01

Housing color:

1: Black
5: White
6: Blue

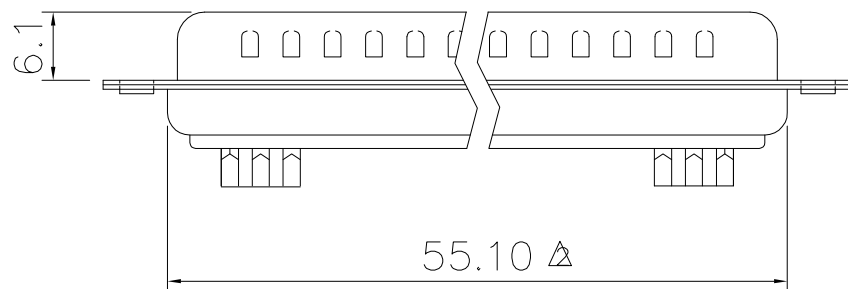

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Plating: Sn, Au
Item	Desc.	Material	Remark

	2021/04/06	Change part number	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance x. ±0.60 .x ±0.40 .xx ±0.25 	NAME:		D-SUB 50pin male solder				PART NO.		B05-0503X1AN-01	
	2014/11/21	Add dimension comment	King Zhou			REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	2010/06/03	First edition release	Jing Li			SCALE:	N:1	DATE:	2010/06/03	Qiang Liao	Jack Chen		B05-022		
SIDE	DATE	DESCRIPTION	APPROVER			东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									