

2		1			
Pin No.	A	B	C	D	E
09	30.81	24.99	16.33	18.80	15.00
15	39.20	33.30	24.70	26.90	23.60
25	53.05	47.04	37.40	40.30	37.20
37	69.40	63.50	54.80	56.95	53.75





Current rating: 3 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B05-0XX2X1BN-01
No.of contact:
09: 9pin
15: 15pin
25: 25pin
37: 37pin
Housing color:
1: Black
5: White
6: Blue


5	Strain relief	PBT UL94V-0	Color: see part no.
4	Cover	PBT UL94V-0	Color: see part no.
3	Front shell	Steel	Plating: Ni
2	Housing	PBT UL94V-0	Color: see part no.
1	Terminal	Copper alloy	Plating: gold flash and Ni
Item	Desc.	Material	Remark

NAME:		D-SUB female IDC for flat cable, long ear housing, three piece, #4-40			PART NO.		B05-0XX2X1BN-01	
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2011/10/06	Huangmei	Jack Chen		B05-064	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770

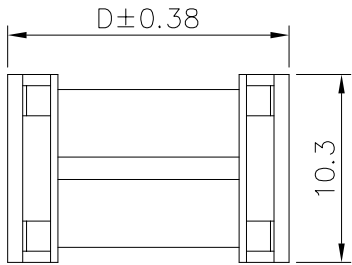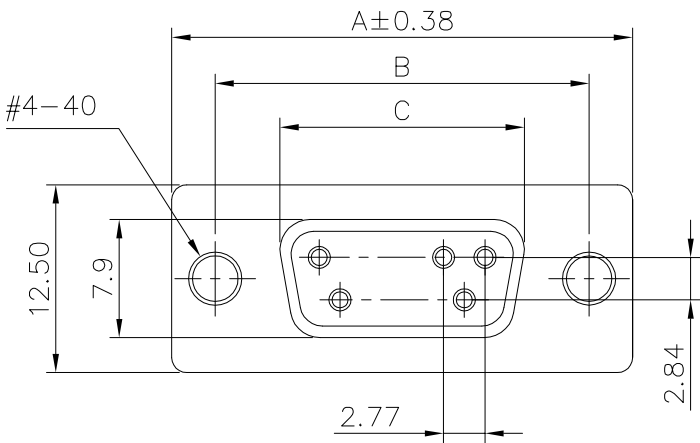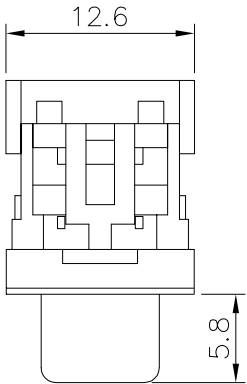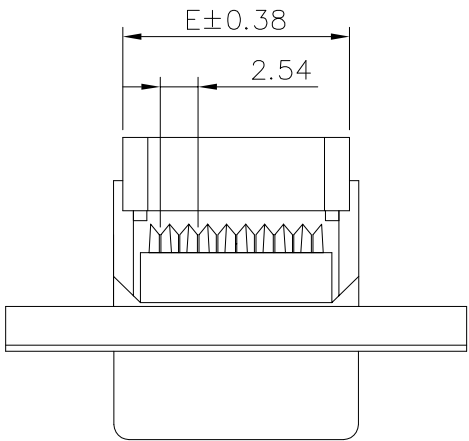

Cover

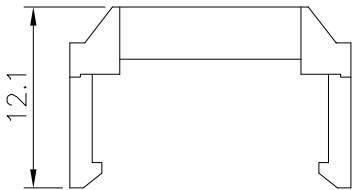

Strain Relief

△	2013/09/22	Change operating temperature	Jack Chen
△	2013/09/17	Add housing color	Jack Chen
△	2011/10/06	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□ :	☒ :
CRITICAL	MAJOR
▽ :	▽ :
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

