

F

E

D

C

B

A

F

E



D

C

B

A



No.of Contact	A	B	C	D	E	F
15	16.92	24.99	30.81	2.29	0.25	0.89
26	25.25	33.32	39.14	2.29	0.51	0.64
44	38.96	47.04	53.04	2.29	0.51	0.64
62	55.42	63.50	69.32	2.41	0.58	0.62

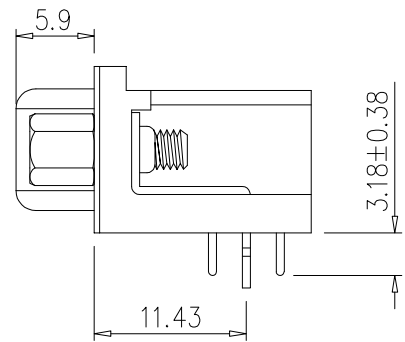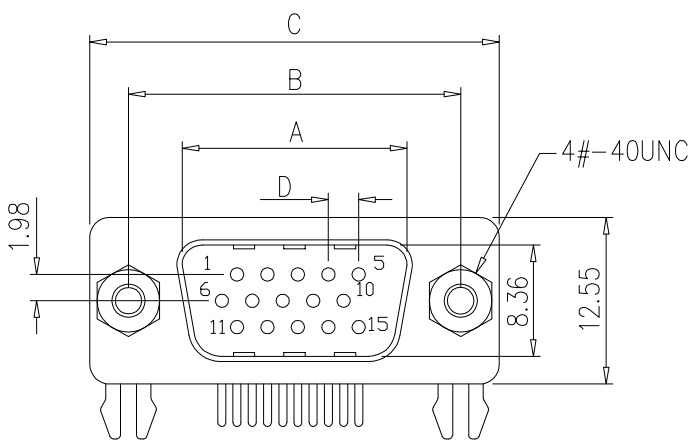

Current Rating: 3 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45℃ to +125℃
Part No.:

B04-0XX5X1AD-F4

No.of contact: _____
15: 15pin
26: 26pin
37: 37pin
62: 62pin
Housing color: _____
1: Black
5: White
6: Blue

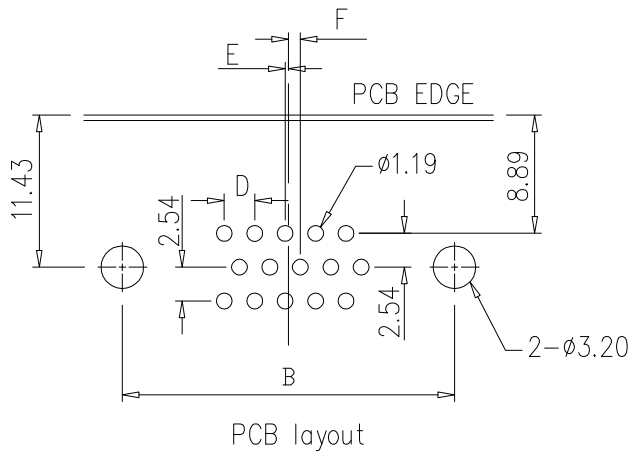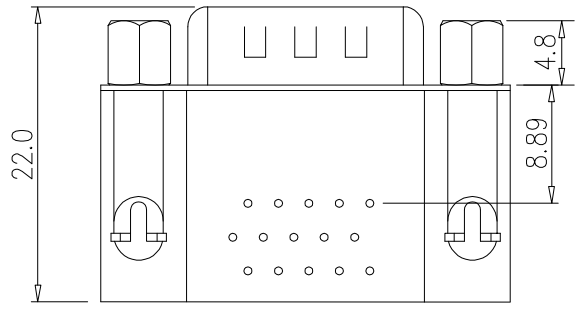

6	Rivet	Copper alloy	Palting: Ni
5	Screw	Steel	Palting: Ni
4	Boardlock	Copper alloy	Palting: Ni
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

△	2012/04/29	Add screw height mark	King Zhou
△	2011/03/07	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL MAJOR		.x	±0.40
		.xx	±0.25
▽:	▽:		
ZERO DEFECTS.P.C			

NAME:	HD.D-SUB male right angle, 8.89mm, riveted board lock, nut 4.8mm				PART NO.	B04-0XX5X1AD-F4	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2011/03/07	Jing Li	King Zhou		B04-024
lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
TEL: 0769-85181660 85181770							