

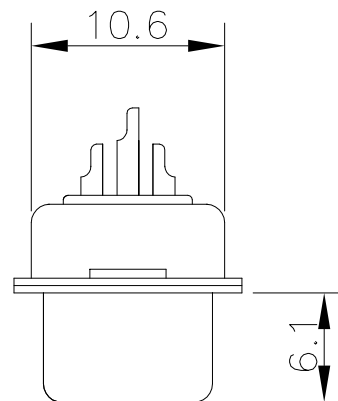


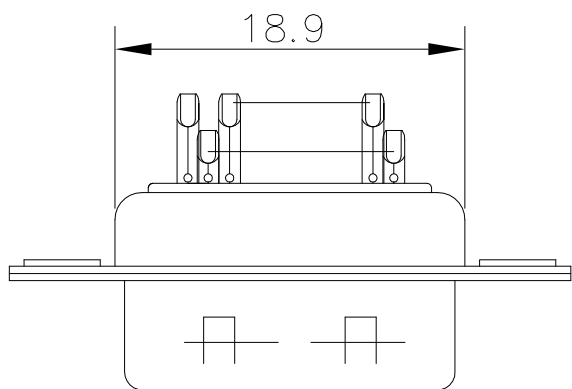

△ Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

Part No.: B04-0153X1AN-A1
Housing color: _____
1: Black
5: White
6: Blue

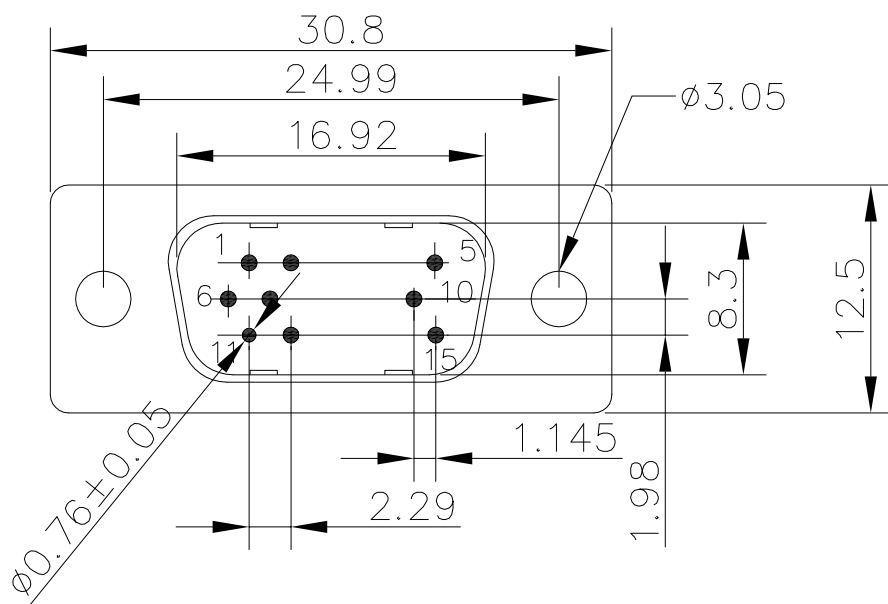

4	Rear shell	SPCC	Palting: Sn
3	Front shell	SPCC	Palting: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn
Item	Desc.	Material	Remaks

△			
△	2023/06/24	Changed electrical properties	Jack Chen
△	2009/04/14	First edition release	Jing Li

QUALITY SYMBOLS	
□ :	☒ :
CRITICAL	MAJOR
▽ :	▽ :
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	HD.D-SUB male solder,one-piece housing				PART NO.	B04-0153X1AN-A1		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2009/04/14	Huangmei	Jack Chen		B04-003	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------