


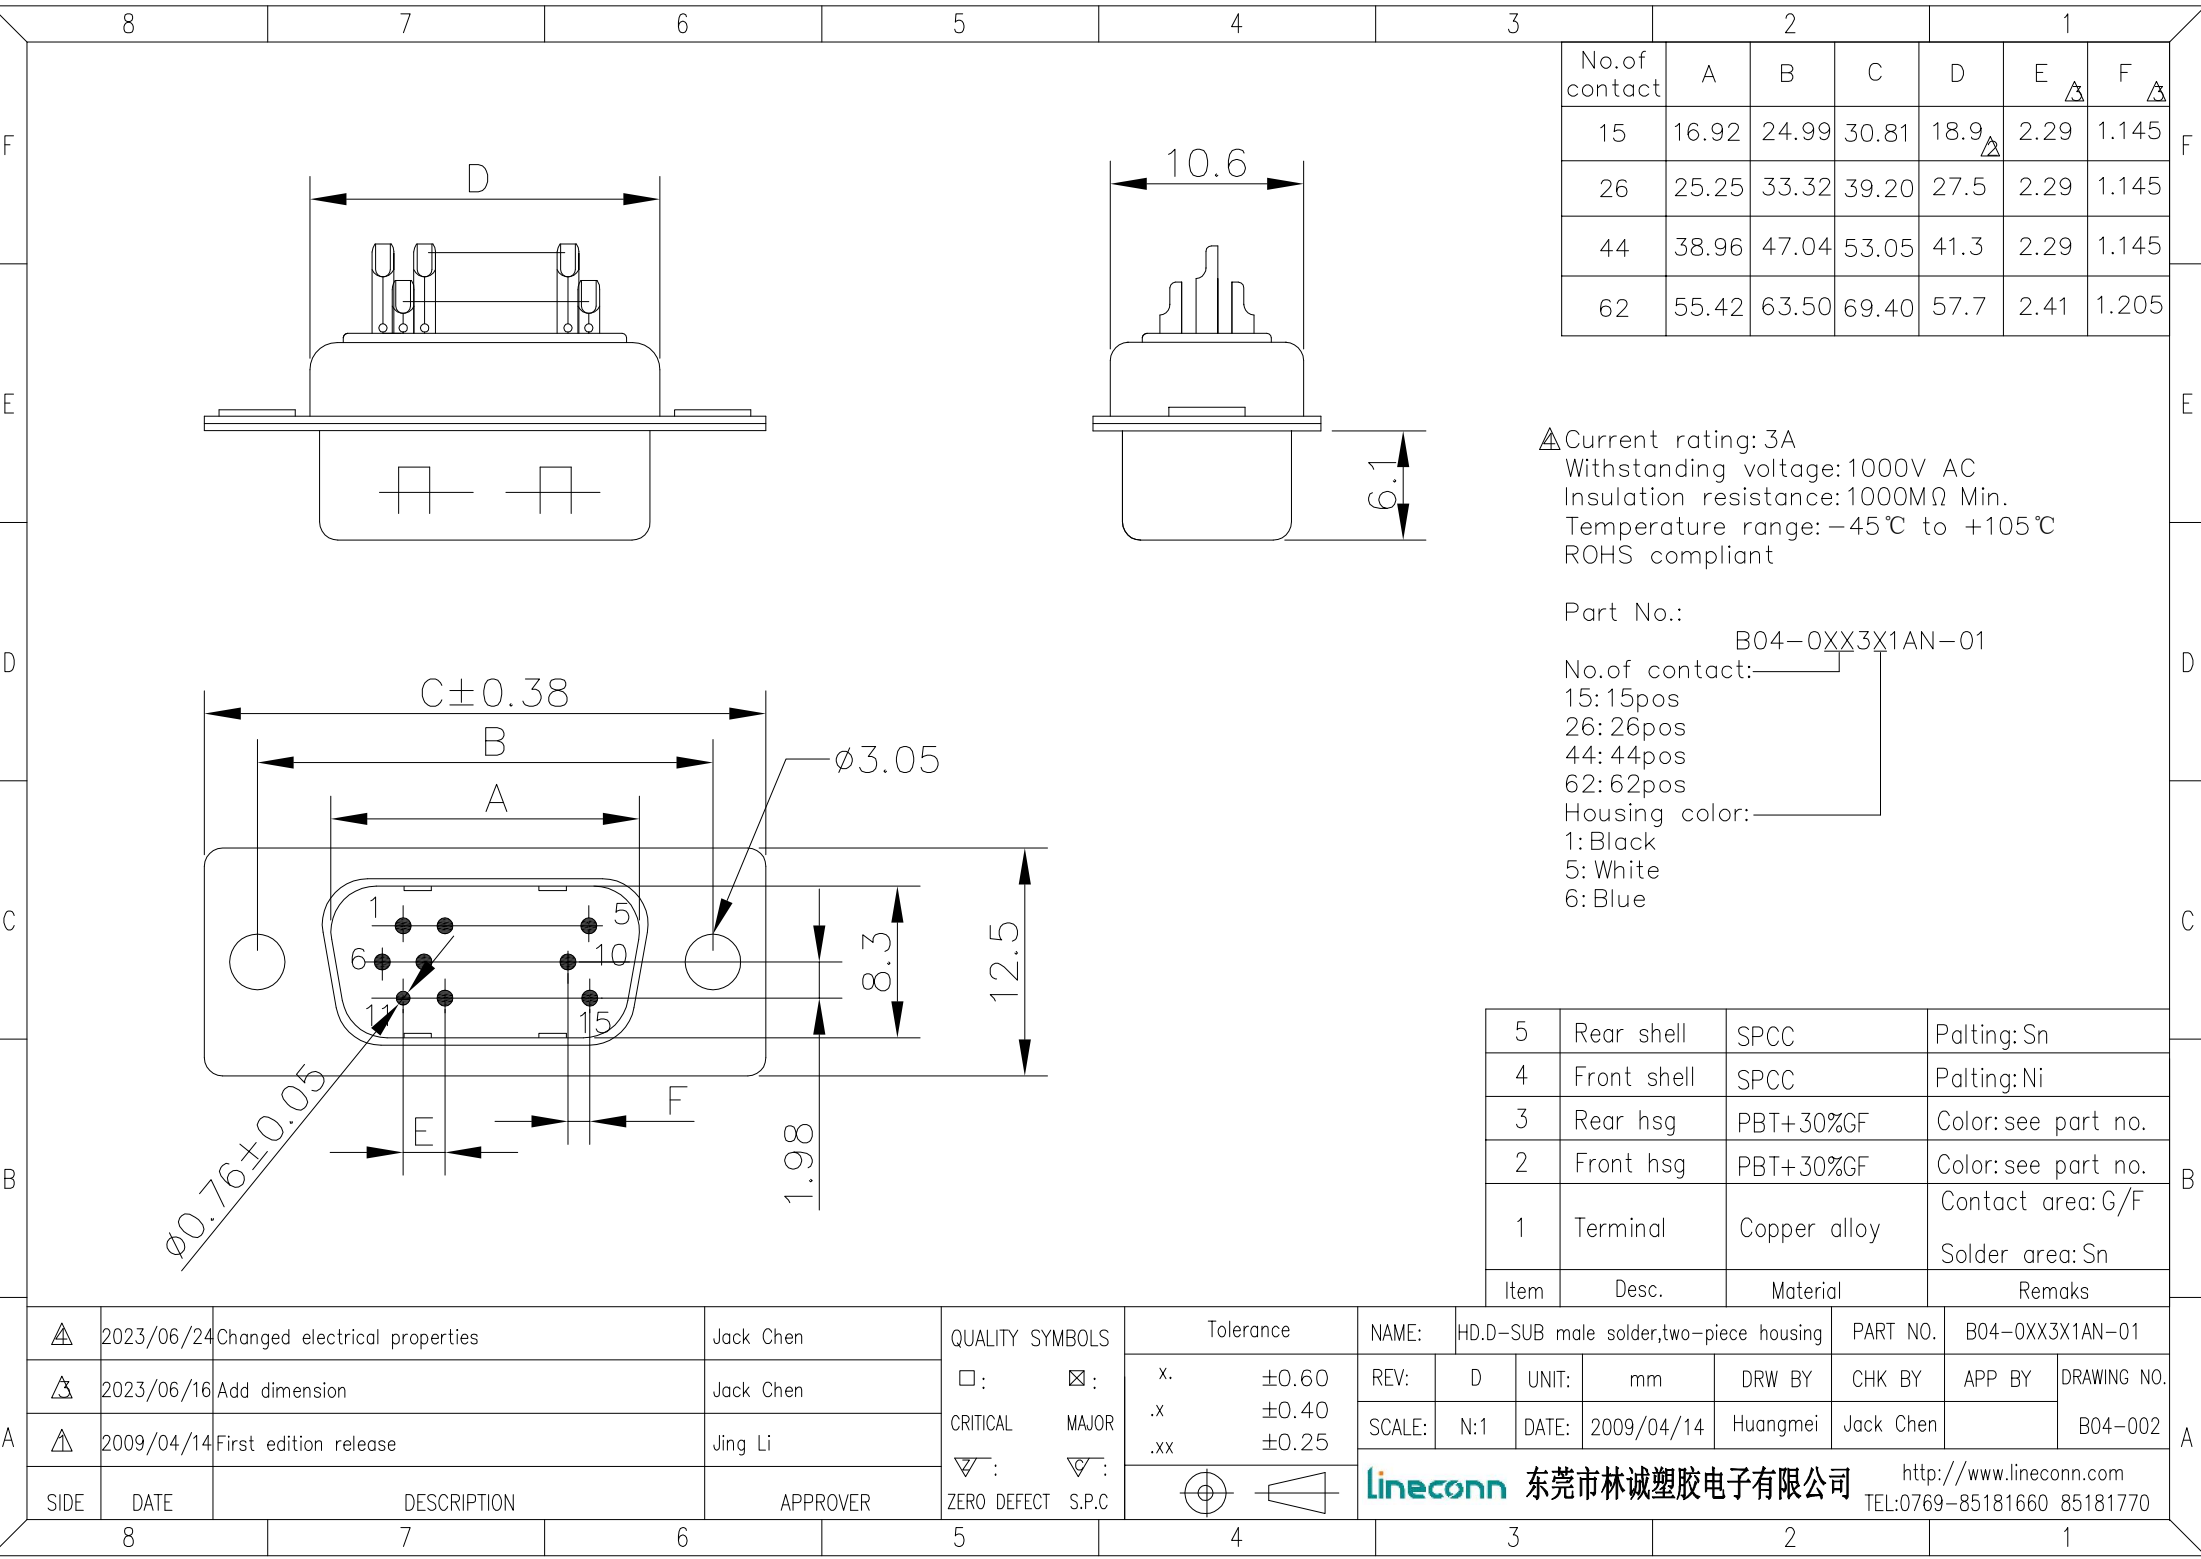

No.of contact	A	B	C	D	E	F
15	16.92	24.99	30.81	18.9	2.29	1.145
26	25.25	33.32	39.20	27.5	2.29	1.145
44	38.96	47.04	53.05	41.3	2.29	1.145
62	55.42	63.50	69.40	57.7	2.41	1.205

▲Current rating: 3A
Withstanding voltage:1000V AC
Insulation resistance:1000MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

Part No.: B04-0XX3X1AN-01
No.of contact: _____
15: 15pos
26: 26pos
44: 44pos
62: 62pos
Housing color: _____
1: Black
5: White
6: Blue

5	Rear shell	SPCC	Palting: Sn
4	Front shell	SPCC	Palting: Ni
3	Rear hsg	PBT+30%GF	Color: see part no.
2	Front hsg	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn
Item	Desc.	Material	Remaks

	2023/06/24	Changed electrical properties	Jack Chen	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME:	HD.D-SUB male solder,two-piece housing				PART NO.	B04-0XX3X1AN-01		
	2023/06/16	Add dimension	Jack Chen		x.	±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B04-002	
	2009/04/14	First edition release	Jing Li		.x	±0.40	SCALE:	N:1	DATE:	2009/04/14	Huangmei	Jack Chen			
					.xx	±0.25									
SIDE	DATE	DESCRIPTION	APPROVER				东莞市林诚塑胶电子有限公司 http://www.lineconn.com								
								TEL:0769-85181660 85181770							