

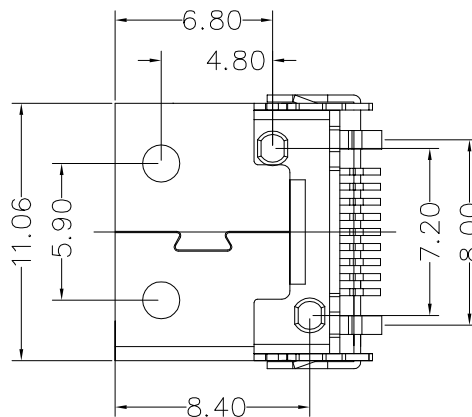
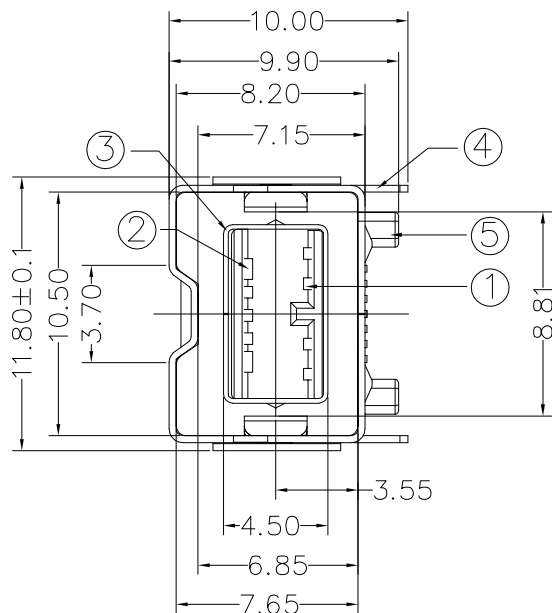


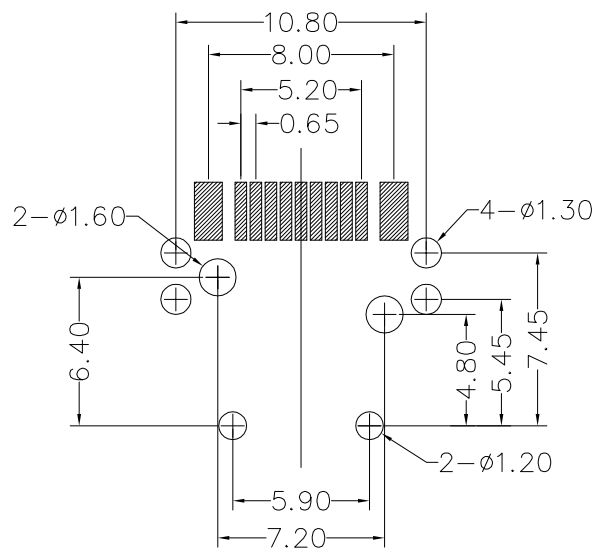

Voltage current rating:1.5 AMP.30V AC
Dielectric withstanding voltage:500V AC
Contact resistance:30 mΩ Max.
Insulation resistance:1000MΩ Min.
Temperature range:-45℃ to +125℃
ROHS compliant

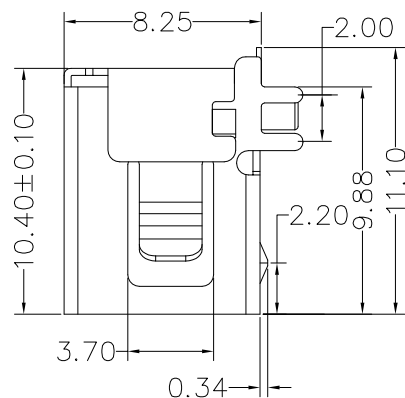

PCB layout

5	Housing	LCP UL94V-0	Color: black
4	Shell	Brass T=0.3mm	Over-plating: Ni
3	Inner shell	Brass T=0.2mm	Over-plating: Ni
2	Terminal 2	Phosphor bronze T=0.2mm	Contact area: G/F Solder area: G/F Under-plating: Ni
1	Terminal 1	Phosphor bronze T=0.2mm	Contact area: G/F Solder area: G/F Under-plating: Ni
Item	Desc.	Material	Remarks

△			
△	2021/06/14	Change tolerance,Change temperature range	Shuo Cao
△	2008/04/26	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		1394B 9pin female bilingual,terminal SMT,shell DIP			PART NO.	B19-009013A0-01	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	NONE	DATE:	2008/04/26	Qiang Liao	Shuo Cao		B19-002
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL: 0769-85181660 85181770		